


SIGN	DATE	DESCRIPTION	APPROVER
△	01/21/13	change the electrical specification	Da cheng


THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:


- Item (A) Lever: Thermoplastic (UL 94V-0)
- Item (B) Terminal housing: Thermoplastic (UL 94V-0)
- Item (C) Wire guard: Stainless steel
- Item (D) Solder Pin: Brass.Tin plated

Electrical:

- Voltage rating: 300 V
- Current rating(SOL): 7 A
- Current rating(STR): 10 A
- Wire range:
- Solid wire(AWG): 18-24
- Stranded wire(AWG): 16-22
- Wire strip length: 12-13 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: 
- Critical dimension: ▽

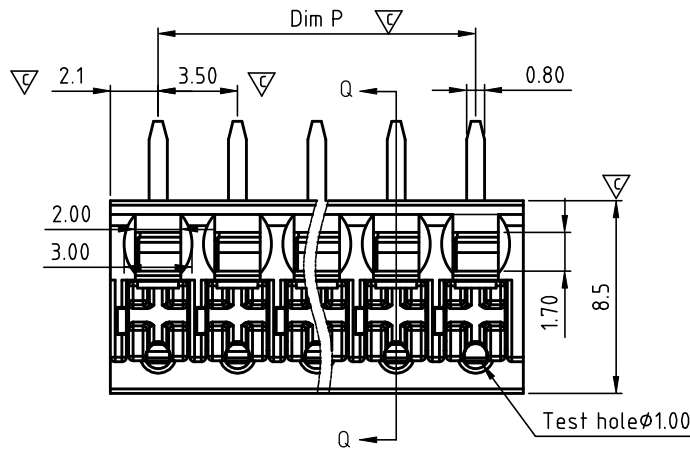

The color of lever is consistent with body's

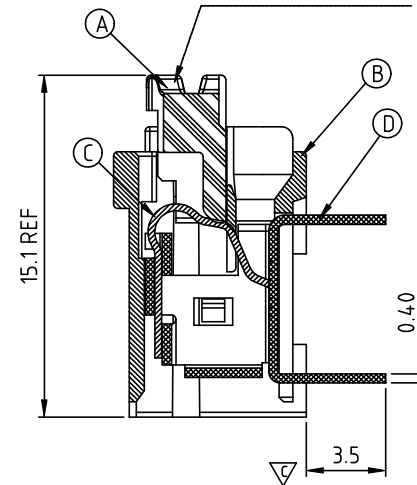




SECTION Q-Q

NM xx 1 0 x 1 Axxx G

- No. OF POLES
- 02 2 CONTACTS
- 03 3 CONTACTS
-
- 24 24 CONTACTS

- Color
- 0 Black (RAL9005)
- 3: Orange (RAL 2011/P)
- 5: GREEN (RAL 6018/T)
- 6: Blue (RAL5015/A)
- 8: GREY (RAL 7004/P)

RoHS compliant (lead<4%)
In copper Alloy
A000: "@" Logo (Standard)
A00A: "ANYTEK" Mark
Any special item by customer request.
please contact sales department.

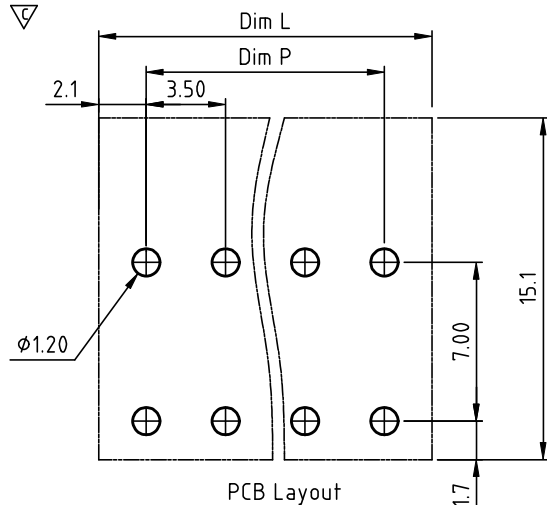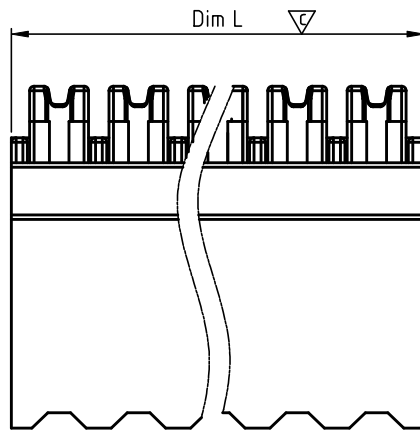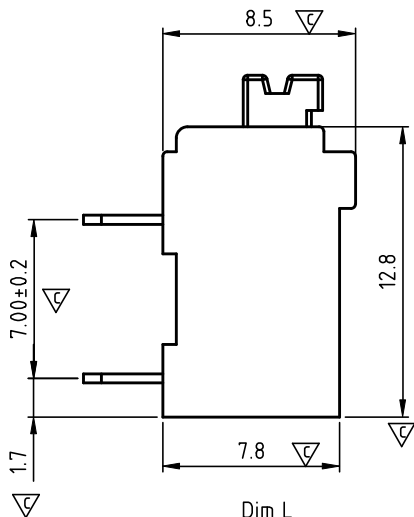

PCB Layout


N=NUMBER OF CONTACTS

DIM	TOL				
	2P--6P	7P--12P	13P--18P	19P--24P	
Dim L	N×3.5+0.70	±0.15	±0.20	±0.30	±0.40
Dim P	(N-1)×3.5	±0.15	±0.20	±0.30	±0.40

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		NM 3.5 Series Horizontal 180° wire inlet			
PART NO.	NMxx10x1AxxxG			DWG NO.	8NM0301
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Da cheng 2013.01.21	Da cheng 2013.01.21		
					Tolerance
					UNIT: mm
				SCALE: NONE	X.X ±0.30
				SHEET: 01/01	X.XX ±0.10
				REV.: B	X° ±1°