


## Power Metal Film Leaded Resistors



### DESCRIPTION

A homogeneous film of metal alloy is deposited on a high grade ceramic body. After a helical groove has been cut in the resistive layer, tinned connecting wires of electrolytic copper or copper-clad iron are welded to the end-caps. The resistors are coated with a red, non-flammable lacquer which provides electrical, mechanical and climatic protection. This coating is not resistant to aggressive fluxes. The encapsulation is resistant to all cleaning solvents in accordance with IEC 60068-2-45.

### FEATURES

- High power in small packages (1 W/0207 size to 3 W/0617 size)
- Different lead materials for different applications
- Defined interruption behaviour
- Lead (Pb)-free solder contacts
- Pure tin plating provides compatibility with lead (Pb)-free and lead containing soldering processes
- Compliant to RoHS directive 2002/95/EC


**RoHS**  
COMPLIANT

### APPLICATIONS

- All general purpose power applications

### TECHNICAL SPECIFICATIONS

| DESCRIPTION                                         | VALUE                                                      |                |             |                |             |
|-----------------------------------------------------|------------------------------------------------------------|----------------|-------------|----------------|-------------|
|                                                     | PR01                                                       | PR02           |             | PR03           |             |
|                                                     |                                                            | Cu-lead        | FeCu-lead   | Cu-lead        | FeCu-lead   |
| Resistance Range <sup>(2)</sup>                     | 0.22 Ω to 1 MΩ                                             | 0.33 Ω to 1 MΩ | 1 Ω to 1 MΩ | 0.68 Ω to 1 MΩ | 1 Ω to 1 MΩ |
| Resistance Tolerance and Series                     | ± 1 % (E24, E96 series); ± 5 % (E24 series) <sup>(1)</sup> |                |             |                |             |
| Rated Dissipation, $P_{70}$ :                       |                                                            |                |             |                |             |
| $R < 1\ \Omega$                                     | 0.6 W                                                      | 1.2 W          | -           | 1.6 W          | -           |
| $1\ \Omega \leq R$                                  | 1 W                                                        | 2 W            | 1.3 W       | 3 W            | 2.5 W       |
| Thermal Resistance ( $R_{th}$ )                     | 135 K/W                                                    | 75 K/W         | 115 K/W     | 60 K/W         | 75 K/W      |
| Temperature Coefficient                             | ≤ ± 250 ppm/K                                              |                |             |                |             |
| Maximum Permissible Voltage<br>( $U_{max}$ . AC/DC) | 350 V                                                      | 500 V          |             | 750 V          |             |
| Basic Specifications                                | IEC 60115-1                                                |                |             |                |             |
| Climatic Category (IEC 60068-1)                     | 55/155/56                                                  |                |             |                |             |
| Stability After:                                    |                                                            |                |             |                |             |
| Load (1000 h, $P_{70}$ )                            | $\Delta R$ max.: ± (5 % $R$ + 0.1 Ω)                       |                |             |                |             |
| Long Term Damp Heat Test (56 Days)                  | $\Delta R$ max.: ± (3 % $R$ + 0.1 Ω)                       |                |             |                |             |
| Soldering (10 s, 260 °C)                            | $\Delta R$ max.: ± (1 % $R$ + 0.05 Ω)                      |                |             |                |             |

### Notes

<sup>(1)</sup> 1 % tolerance is available for  $R_n$ -range from 1  $R$  upwards

<sup>(2)</sup> Ohmic values (other than resistance range) are available on request

- $R$  value is measured with probe distance of 24 mm  $\pm$  1 mm using 4-terminal method

| PART NUMBER AND PRODUCT DESCRIPTION  |                                             |                                                          |              |                                                                                                                                                                                                                                                                      |   |                              |   |   |                        |   |                                                                      |   |                                                               |   |   |   |   |
|--------------------------------------|---------------------------------------------|----------------------------------------------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|------------------------------|---|---|------------------------|---|----------------------------------------------------------------------|---|---------------------------------------------------------------|---|---|---|---|
| PART NUMBER: PR02000201001JA100      |                                             |                                                          |              |                                                                                                                                                                                                                                                                      |   |                              |   |   |                        |   |                                                                      |   |                                                               |   |   |   |   |
| P                                    | R                                           | 0                                                        | 2            | 0                                                                                                                                                                                                                                                                    | 0 | 0                            | 2 | 0 | 1                      | 0 | 0                                                                    | 1 | J                                                             | A | 1 | 0 | 0 |
| MODEL/SIZE                           | VARIANT                                     | WIRE TYPES                                               | TCR/MATERIAL | VALUE                                                                                                                                                                                                                                                                |   |                              |   |   | TOLERANCE              |   | PACKAGING <sup>(1)</sup>                                             |   | SPECIAL                                                       |   |   |   |   |
| PR0100<br>PR0200<br>PR0300           | 0 = Neutral<br>Z = Value overflow (Special) | 1 = Cu 0.6<br>2 = Cu 0.8<br>3 = FeCu 0.6<br>4 = FeCu 0.8 | 0 = Standard | 3 digit value<br>1 digit multiplier<br>MULTIPLIER<br><br>7 = *10 <sup>-3</sup> 2 = *10 <sup>2</sup><br>8 = *10 <sup>-2</sup> 3 = *10 <sup>3</sup><br>9 = *10 <sup>-1</sup> 4 = *10 <sup>4</sup><br>0 = *10 <sup>0</sup> 5 = *10 <sup>5</sup><br>1 = *10 <sup>1</sup> |   |                              |   |   | F = ± 1 %<br>J = ± 5 % |   | N4    R2<br>N3    L1<br>A5    DC<br>A1    K1<br>AC    B1<br>R5    PC |   | The 2 digits are used for all special parts.<br>00 = Standard |   |   |   |   |
| PRODUCT DESCRIPTION: PR02 5 % A1 1K0 |                                             |                                                          |              |                                                                                                                                                                                                                                                                      |   |                              |   |   |                        |   |                                                                      |   |                                                               |   |   |   |   |
| PR02                                 |                                             | 5 %                                                      |              | A1                                                                                                                                                                                                                                                                   |   | 1K0                          |   |   |                        |   |                                                                      |   |                                                               |   |   |   |   |
| MODEL/SIZE                           |                                             | TOLERANCE                                                |              | PACKAGING <sup>(1)</sup>                                                                                                                                                                                                                                             |   | RESISTANCE VALUE             |   |   |                        |   |                                                                      |   |                                                               |   |   |   |   |
| PR01<br>PR02<br>PR03                 |                                             | ± 1 %<br>± 5 %                                           |              | N4    L1<br>N3    DC<br>A5    K1<br>A1    B1<br>AC    PC<br>R5    R2                                                                                                                                                                                                 |   | 1K0 = 1 kΩ<br>4K75 = 4.75 kΩ |   |   |                        |   |                                                                      |   |                                                               |   |   |   |   |


**Notes**

<sup>(1)</sup> Please refer to table PACKAGING for details

- The PART NUMBER is shown to facilitate the introduction of a unified part numbering system for ordering products


| PACKAGING |              |           |      |        |      |                   |        |      |
|-----------|--------------|-----------|------|--------|------|-------------------|--------|------|
| MODEL     | TAPING       | AMMO PACK |      | REEL   |      | BULK, DOUBLE KINK |        |      |
|           |              | PIECES    | CODE | PIECES | CODE | PITCH             | PIECES | CODE |
| PR01      | Axial, 52 mm | 5000      | A5   | 5000   | R5   |                   |        |      |
|           |              | 1000      | A1   |        |      |                   |        |      |
|           | Radial       | 4000      | N4   |        |      | 17.8 mm           | 1000   | L1   |
|           |              |           |      |        |      | 12.5 mm           | 1000   | K1   |
| PR02      | Axial, 52 mm | 1000      | A1   | 5000   | R5   |                   |        |      |
|           | Radial       | 3000      | N3   | 2000   | R2   | 17.8 mm           | 1000   | L1   |
|           |              |           |      |        |      | 15.0 mm           | 1000   | B1   |
| PR03      | Axial, 63 mm | 500       | AC   |        |      |                   |        |      |
|           | Radial       |           |      |        |      | 25.4 mm           | 500    | DC   |
|           |              |           |      |        |      | 20.0 mm           | 500    | PC   |

## DIMENSIONS

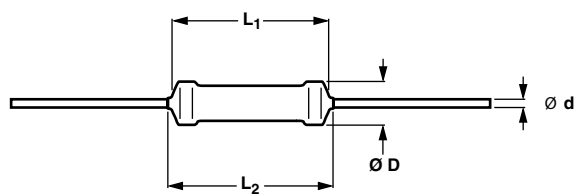

Type with straight leads


| DIMENSIONS - Straight lead type and relevant physical dimensions; see straight leads outline |                             |                             |                             |             |             |
|----------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|-----------------------------|-------------|-------------|
| TYPE                                                                                         | Ø D <sub>max.</sub><br>(mm) | L <sub>1</sub> max.<br>(mm) | L <sub>2</sub> max.<br>(mm) | Ø d<br>(mm) |             |
|                                                                                              |                             |                             |                             | Cu          | FeCu        |
| PR01                                                                                         | 2.5                         | 6.5                         | 8.0                         | 0.58 ± 0.05 | -           |
| PR02                                                                                         | 3.9                         | 10.0                        | 12.0                        | 0.78 ± 0.05 | 0.58 ± 0.05 |
| PR03                                                                                         | 5.2                         | 16.7                        | 19.5                        | 0.78 ± 0.05 | 0.58 ± 0.05 |

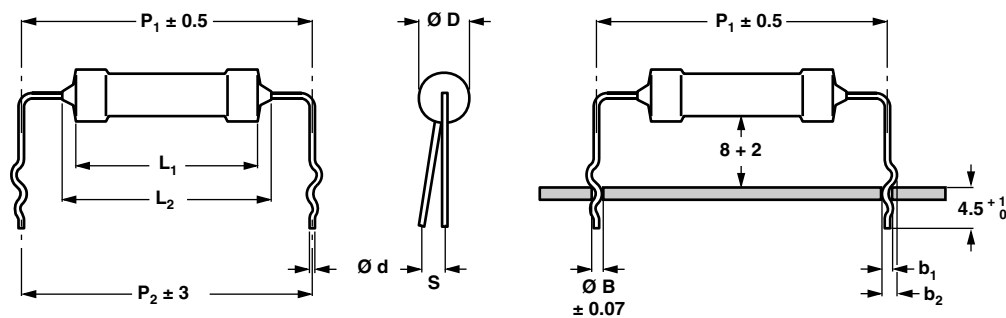

Type with double kink

Dimensions in millimeters

| DIMENSIONS - Double kink lead type and relevant physical dimensions; see double kinked outline |                         |             |             |                        |                        |                             |                        |                        |                           |             |
|------------------------------------------------------------------------------------------------|-------------------------|-------------|-------------|------------------------|------------------------|-----------------------------|------------------------|------------------------|---------------------------|-------------|
| TYPE                                                                                           | LEAD STYLE              | Ø d<br>(mm) |             | b <sub>1</sub><br>(mm) | b <sub>2</sub><br>(mm) | Ø D <sub>max.</sub><br>(mm) | P <sub>1</sub><br>(mm) | P <sub>2</sub><br>(mm) | S <sub>max.</sub><br>(mm) | Ø B<br>(mm) |
|                                                                                                |                         | Cu          | FeCu        |                        |                        |                             |                        |                        |                           |             |
| PR01                                                                                           | Double kink large pitch | 0.58 ± 0.05 | 0.58 ± 0.05 | 1.10<br>+ 0.25/- 0.20  | 1.45<br>+ 0.25/- 0.20  | 2.5                         | 17.8                   | 17.8                   | 2                         | 0.8         |
|                                                                                                | Double kink small pitch | -           | 0.58 ± 0.05 | 1.10<br>+ 0.25/- 0.20  | 1.45<br>+ 0.25/- 0.20  |                             | 12.5                   | 12.5                   | 2                         | 0.8         |
| PR02                                                                                           | Double kink large pitch | 0.78 ± 0.05 | 0.58 ± 0.05 | 1.10<br>+ 0.25/- 0.20  | 1.45<br>+ 0.25/- 0.20  | 3.9                         | 17.8                   | 17.8                   | 2                         | 0.8         |
|                                                                                                | Double kink small pitch | -           | 0.78 ± 0.05 | 1.30<br>+ 0.25/- 0.20  | 1.65<br>+ 0.25/- 0.20  |                             | 15.0                   | 15.0                   | 2                         | 1.0         |
| PR03                                                                                           | Double kink large pitch | 0.78 ± 0.05 | 0.58 ± 0.05 | 1.10<br>+ 0.25/- 0.20  | 1.65<br>+ 0.25/- 0.20  | 5.2                         | 25.4                   | 25.4                   | 2                         | 1.0         |
|                                                                                                | Double kink small pitch | -           | 0.78 ± 0.05 | 1.30<br>+ 0.25/- 0.20  | 2.15<br>+ 0.25/- 0.20  |                             | 22.0                   | 20.0                   | 2                         | 1.0         |

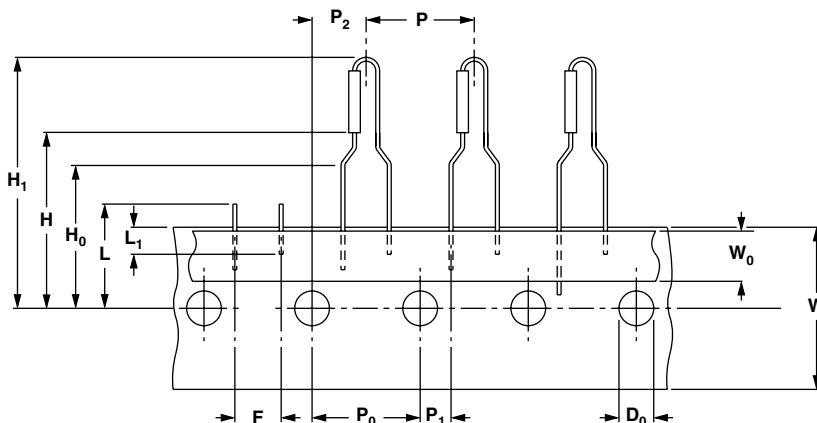**PRODUCTS WITH RADIAL LEADS (PR01, PR02)**


| DIMENSIONS - RADIAL TAPING |                                                 |       |           |      |
|----------------------------|-------------------------------------------------|-------|-----------|------|
| SYMBOL                     | PARAMETER                                       | VALUE | TOLERANCE | UNIT |
| P                          | Pitch of components                             | 12.7  | $\pm 1.0$ | mm   |
| P <sub>0</sub>             | Feed-hole pitch                                 | 12.7  | $\pm 0.2$ | mm   |
| P <sub>1</sub>             | Feed-hole centre to lead at topside at the tape | 3.85  | $\pm 0.5$ | mm   |
| P <sub>2</sub>             | Feed-hole center to body center                 | 6.35  | $\pm 1.0$ | mm   |
| F                          | Lead-to-lead distance                           | 4.8   | + 0.7/- 0 | mm   |
| W                          | Tape width                                      | 18.0  | $\pm 0.5$ | mm   |
| W <sub>0</sub>             | Minimum hold down tape width                    | 5.5   | -         | mm   |
| H <sub>1</sub>             | Component height PR01                           | 29    | Max.      | mm   |
|                            | Component height PR02                           | 29    | $\pm 3.0$ |      |
| H <sub>0</sub>             | Lead wire clinch height                         | 16.5  | $\pm 0.5$ | mm   |
| H                          | Height of component from tape center            | 19.5  | $\pm 1$   | mm   |
| D <sub>0</sub>             | Feed-hole diameter                              | 4.0   | $\pm 0.2$ | mm   |
| L                          | Maximum length of snipped lead                  | 11.0  | -         | mm   |
| L <sub>1</sub>             | Minimum lead wire (tape portion) shortest lead  | 2.5   | -         | mm   |

**Note**

- Please refer document number 28721 "Packaging" for more detail

**MASS PER UNIT**

| TYPE             | MASS (mg) |
|------------------|-----------|
| PR01 Cu 0.6 mm   | 212       |
| PR01 FeCu 0.6 mm | 207       |
| PR02 Cu 0.8 mm   | 504       |
| PR02 FeCu 0.6 mm | 455       |
| PR02 FeCu 0.8 mm | 496       |
| PR03 Cu 0.8 mm   | 1192      |
| PR03 FeCu 0.6 mm | 1079      |
| PR03 FeCu 0.8 mm | 1185      |

**MARKING**

The nominal resistance and tolerance are marked on the resistor using four or five colored bands in accordance with IEC 60062, marking codes for resistors and capacitors.

**OUTLINES**

The length of the body ( $L_1$ ) is measured by inserting the leads into holes of two identical gauge plates and moving these plates parallel to each other until the resistor body is clamped without deformation (IEC 60294).

**MOUNTING**

The resistors are suitable for processing on automatic insertion equipment and cutting and bending machines.

**MOUNTING PITCH**


| TYPE | LEAD STYLE              | PITCH               |                  |
|------|-------------------------|---------------------|------------------|
|      |                         | mm                  | e                |
| PR01 | Straight leads          | 12.5 <sup>(1)</sup> | 5 <sup>(1)</sup> |
|      | Radial taped            | 4.8                 | 2                |
|      | Double kink large pitch | 17.8                | 7                |
|      | Double kink small pitch | 12.5                | 5                |
| PR02 | Straight leads          | 15.0 <sup>(1)</sup> | 6 <sup>(1)</sup> |
|      | Radial taped            | 4.8                 | 2                |
|      | Double kink large pitch | 17.8                | 7                |
|      | Double kink small pitch | 15.0                | 6                |
| PR03 | Straight leads          | 23.0 <sup>(1)</sup> | 9 <sup>(1)</sup> |
|      | Double kink large pitch | 25.4                | 10               |
|      | Double kink small pitch | 20.0                | 8                |

**Note**


<sup>(1)</sup> Recommended minimum value

**FUNCTIONAL DESCRIPTION****PRODUCT CHARACTERIZATION**


Standard values of nominal resistance are taken from the E96/E24 series for resistors with a tolerance of  $\pm 1\%$  or  $\pm 5\%$ . The values of the E96/E24 series are in accordance with IEC 60063.

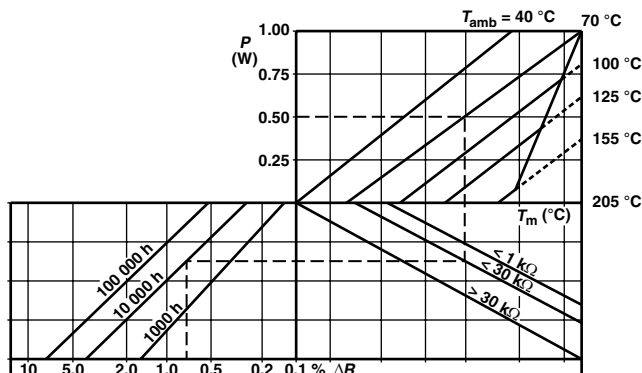**FUNCTIONAL PERFORMANCE**

PR01 Drift nomogram

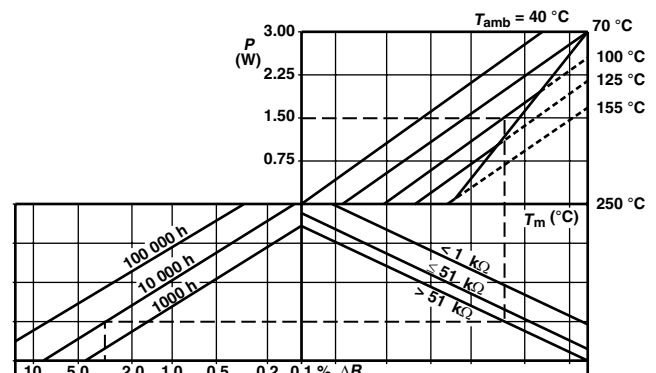

PR03 Drift nomogram

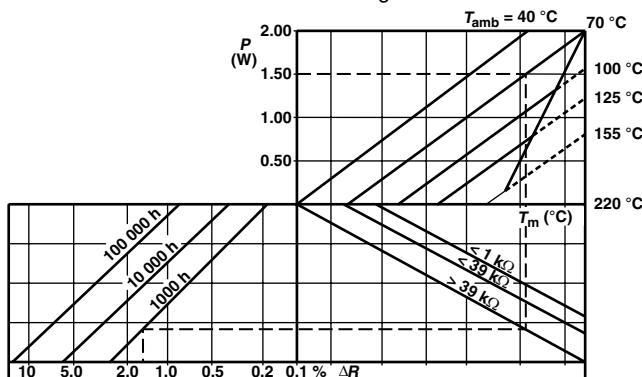


PR02 Drift nomogram

**Note**


- The maximum permissible hot-spot temperature is  $205^\circ\text{C}$  for PR01,  $220^\circ\text{C}$  for PR02 and  $250^\circ\text{C}$  for PR03

The power that the resistor can dissipate depends on the operating temperature.

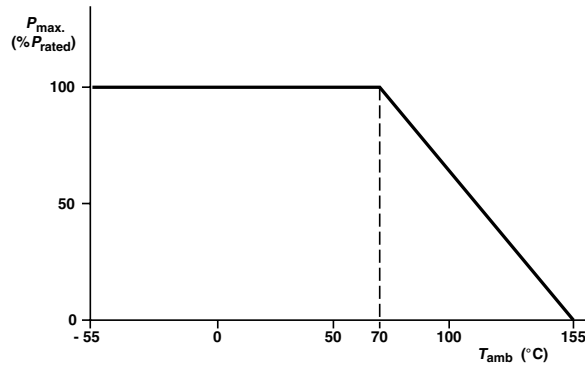


Maximum dissipation ( $P_{max.}$ ) in percentage of rated power as a function of the ambient temperature ( $T_{amb}$ )

### Derating

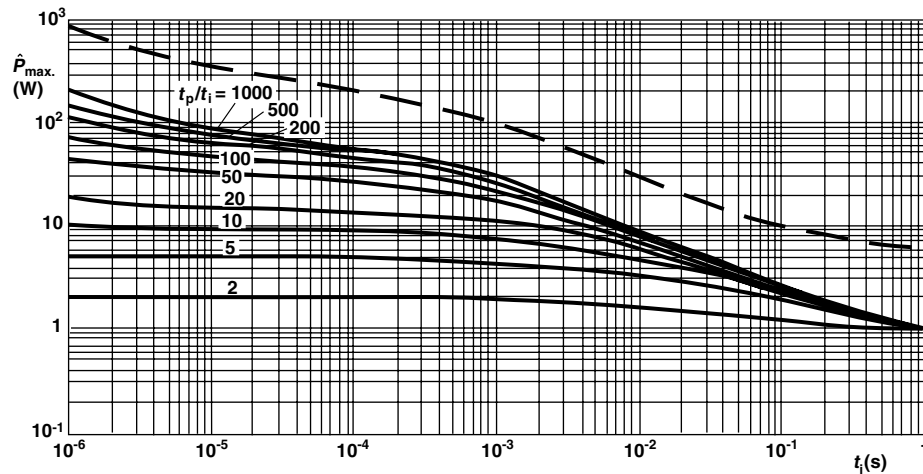


**PR01** Pulse on a regular basis; maximum permissible peak pulse power ( $\hat{P}_{max.}$ ) as a function of pulse duration ( $t_i$ )

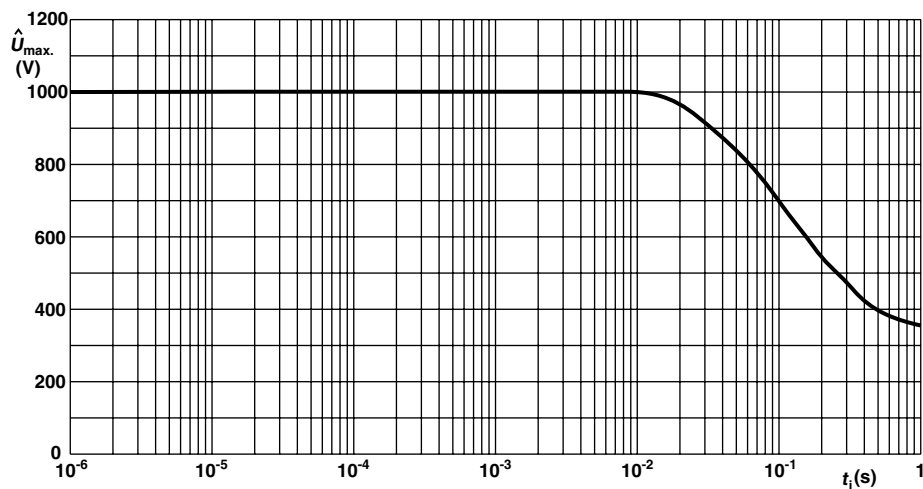


**PR01** Pulse on a regular basis; maximum permissible peak pulse voltage ( $\hat{U}_{max.}$ ) as a function of pulse duration ( $t_i$ )


### Pulse Loading Capabilities

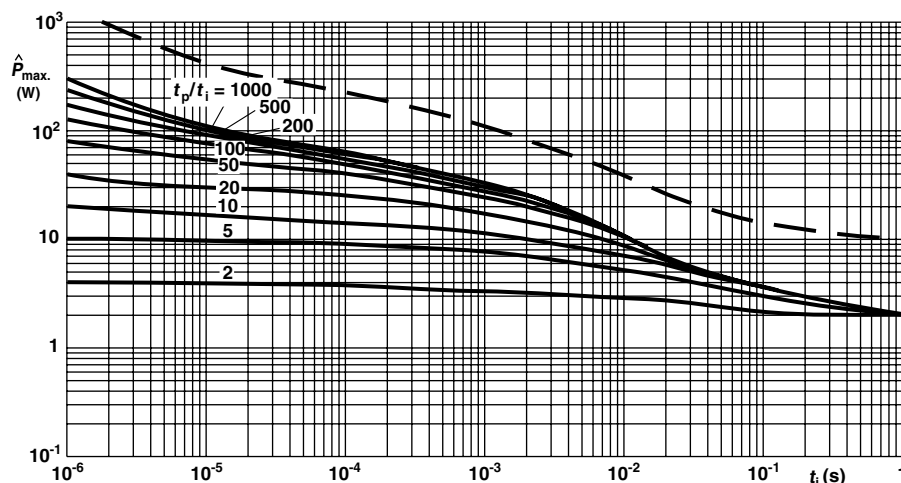

PR02 Pulse on a regular basis; maximum permissible peak pulse power ( $\hat{P}_{max.}$ ) as a function of pulse duration ( $t_i$ )

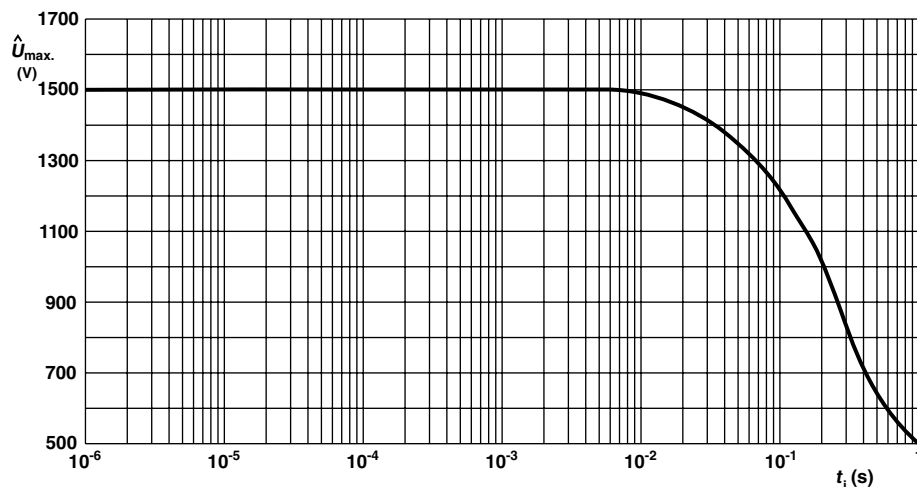


PR02 Pulse on a regular basis; maximum permissible peak pulse voltage ( $\hat{U}_{max.}$ ) as a function of pulse duration ( $t_i$ )

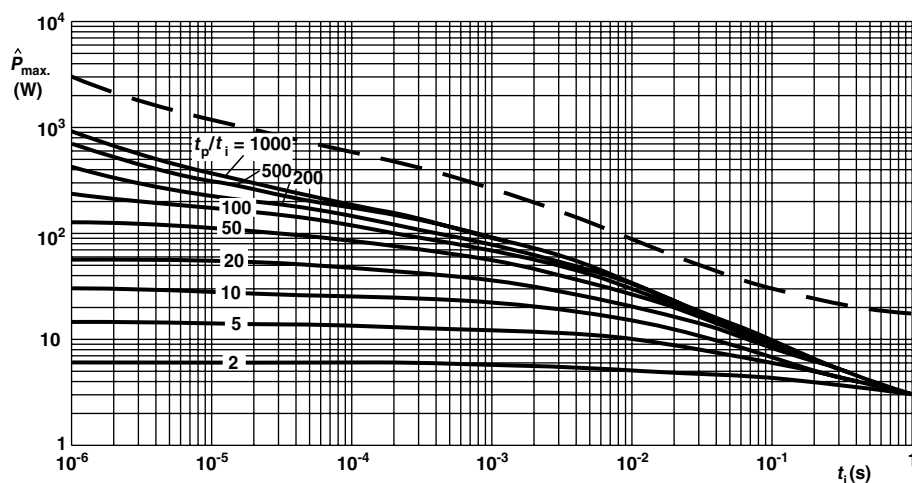


PR03 Pulse on a regular basis; maximum permissible peak pulse power ( $\hat{P}_{max.}$ ) as a function of pulse duration ( $t_i$ )

## Pulse Loading Capabilities

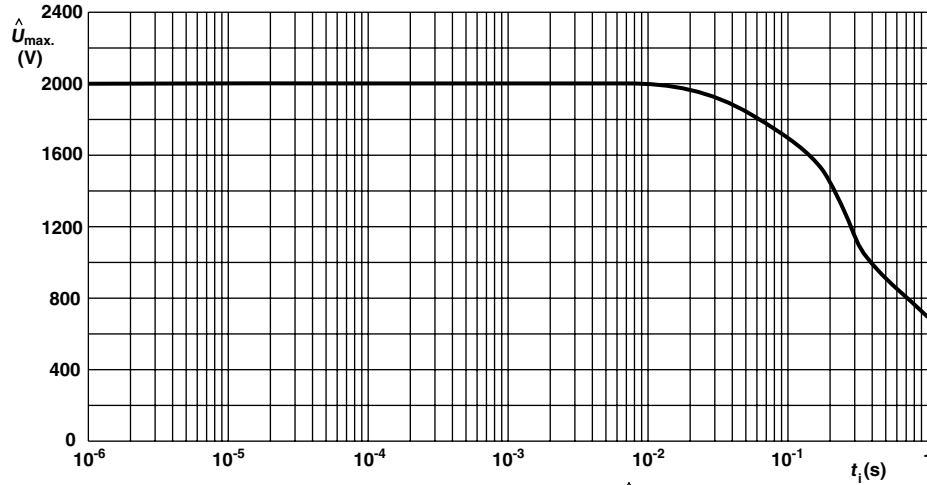


**PR03** Pulse on a regular basis; maximum permissible peak pulse voltage ( $\hat{U}_{max}$ ) as a function of pulse duration ( $t_i$ )

### Pulse Loading Capabilities

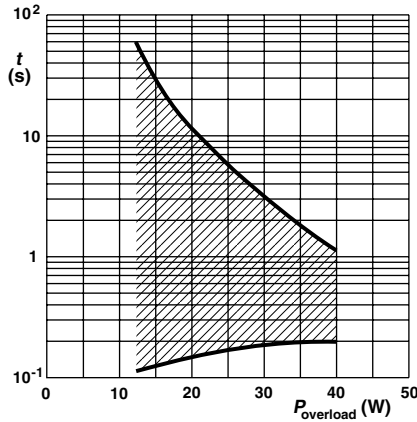


**PR01** Time to interruption as a function of overload power for range:  $0 R 22 \leq R_n < 1 R$

This graph is based on measured data under constant voltage conditions; the data may deviate according to the applications.

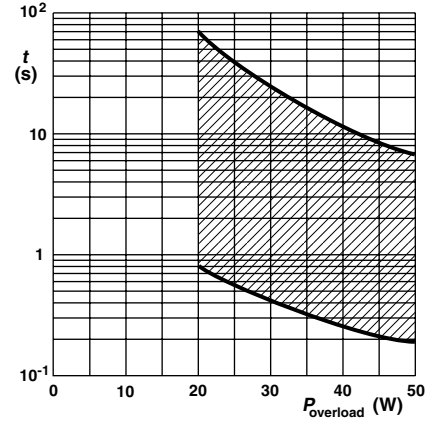


**PR01** Time to interruption as a function of overload power for range:  $16 R \leq R_n \leq 560 R$

This graph is based on measured data under constant voltage conditions; the data may deviate according to the applications.

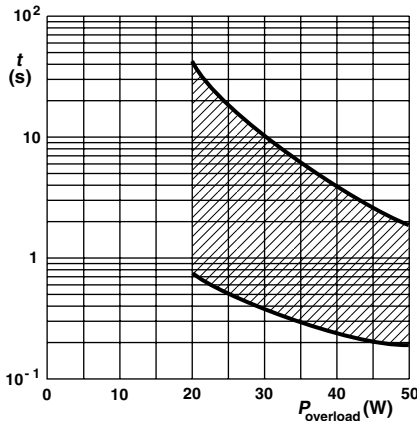

**PR01** Time to interruption as a function of overload power for range:  $1 R \leq R_n \leq 15 R$


This graph is based on measured data under constant voltage conditions; the data may deviate according to the applications.

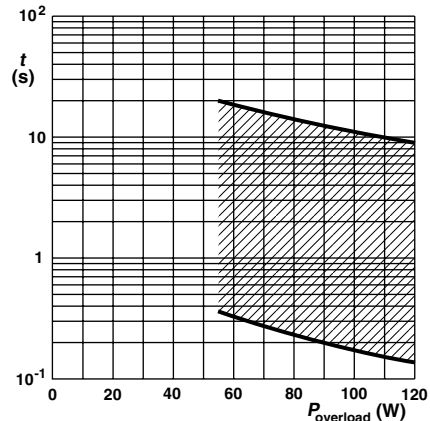

**PR02** Time to interruption as a function of overload power for range:  $0.33 R \leq R_n < 5 R$


This graph is based on measured data under constant voltage conditions; the data may deviate according to the applications.

### Interruption Characteristics

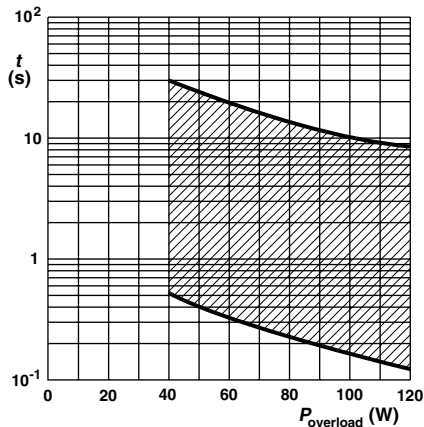

**PR02** Time to interruption as a function of overload power  
for range:  $5 R \leq R_n < 68 R$


This graph is based on measured data under constant voltage conditions; the data may deviate according to the applications.

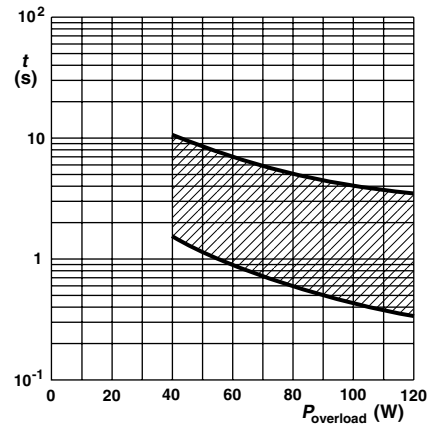

**PR02** Time to interruption as a function of overload power  
for range:  $68 R \leq R_n \leq 560 R$


This graph is based on measured data under constant voltage conditions; the data may deviate according to the applications.

### Interruption Characteristics

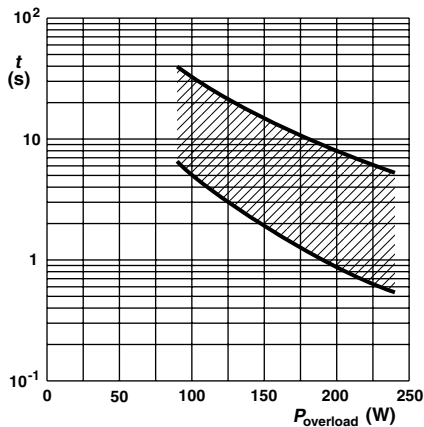


**PR03** Time to interruption as a function of overload power  
for range:  $0.68 R \leq R_n \leq 560 R$

This graph is based on measured data under constant voltage conditions; the data may deviate according to the applications.

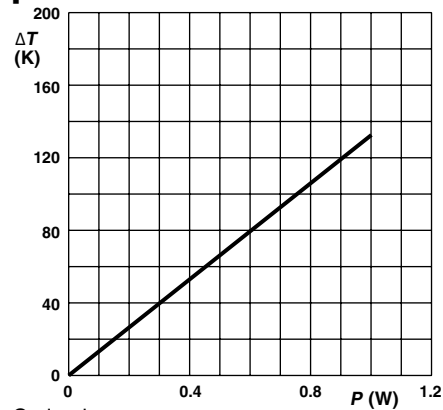

Ø 0.6 mm Cu-leads


**PR01** Hot-spot temperature rise ( $\Delta T$ ) as a function  
of dissipated power.

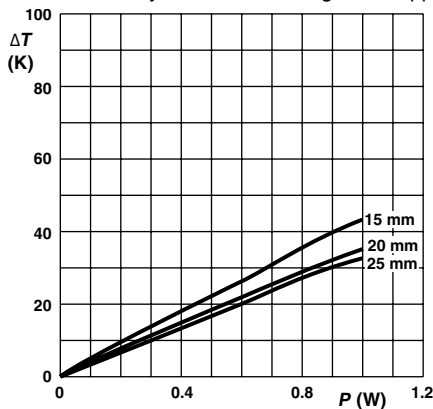

Ø 0.6 mm Cu-leads

Minimum distance from resistor body to PCB = 1 mm


**PR01** Temperature rise ( $\Delta T$ ) at the lead end (soldering point) as a  
function of dissipated power at various lead lengths after mounting.

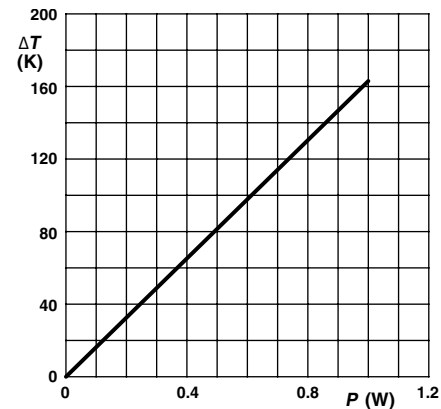

Ø 0.6 mm FeCu-leads

**PR01** Hot-spot temperature rise ( $\Delta T$ ) as a function  
of dissipated power.


### Application Information

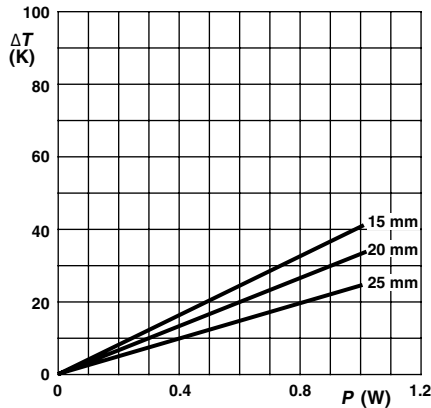

Ø 0.6 mm FeCu-leads


Minimum distance from resistor body to PCB = 1 mm

**PR01** Temperature rise ( $\Delta T$ ) at the lead end (soldering point) as a function of dissipated power at various lead lengths after mounting.

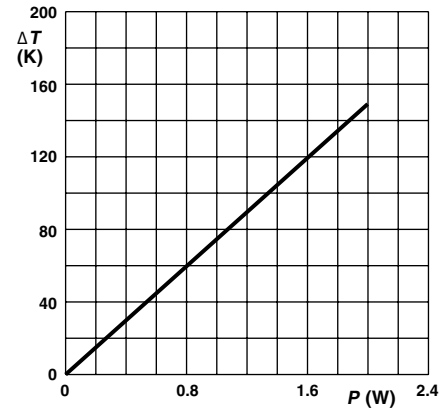

Ø 0.8 mm Cu-leads


**PR02** Hot-spot temperature rise ( $\Delta T$ ) as a function of dissipated power.

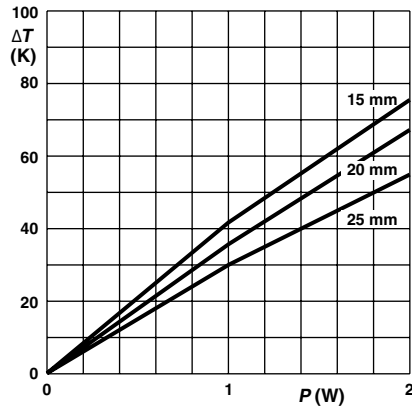

Ø 0.8 mm Cu-leads


Minimum distance from resistor body to PCB = 1 mm

**PR02** Temperature rise ( $\Delta T$ ) at the lead end (soldering point) as a function of dissipated power at various lead lengths after mounting.

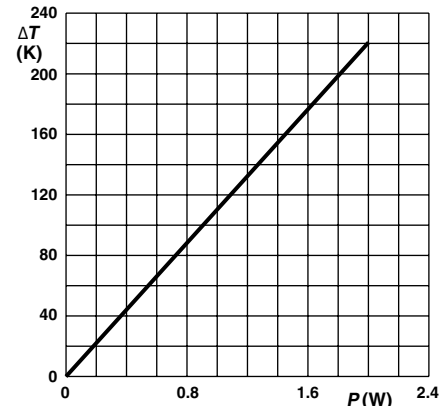

Ø 0.6 mm FeCu-leads


**PR02** Hot-spot temperature rise ( $\Delta T$ ) as a function of dissipated power.

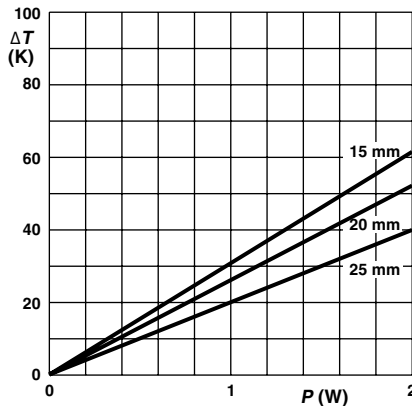

Ø 0.6 mm FeCu-leads

Minimum distance from resistor body to PCB = 1 mm


**PR02** Temperature rise ( $\Delta T$ ) at the lead end (soldering point) as a function of dissipated power at various lead lengths after mounting.

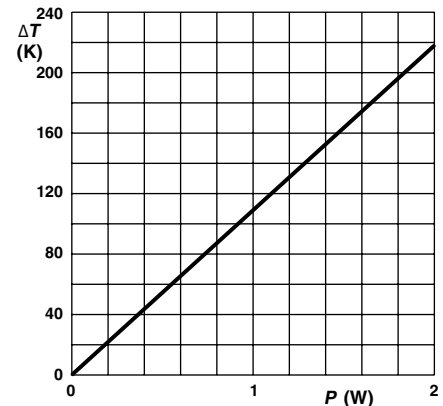

Ø 0.8 mm FeCu-leads

**PR02** Hot-spot temperature rise ( $\Delta T$ ) as a function of dissipated power.


## Application Information

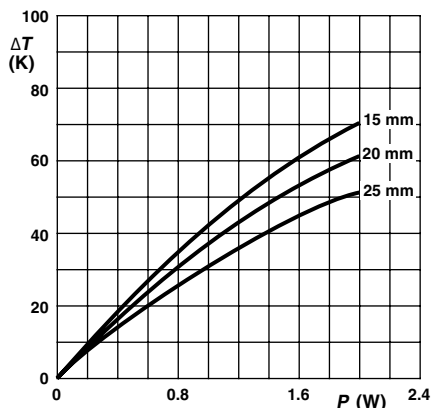

Ø 0.8 mm FeCu-leads


Minimum distance from resistor body to PCB = 1 mm

**PR02** Temperature rise ( $\Delta T$ ) at the lead end (soldering point) as a function of dissipated power at various lead lengths after mounting.

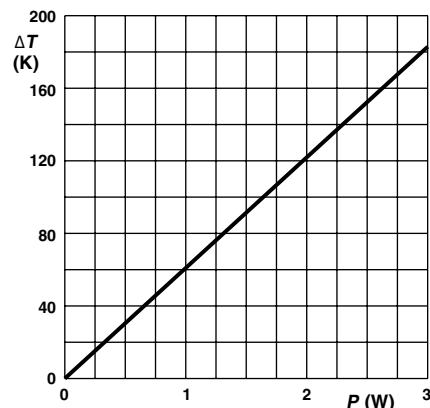

Ø 0.8 mm Cu-leads


**PR03** Hot-spot temperature rise ( $\Delta T$ ) as a function of dissipated power.

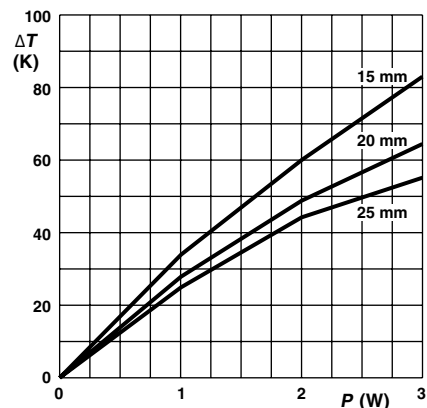

Ø 0.8 mm Cu-leads


Minimum distance from resistor body to PCB = 1 mm

**PR03** Temperature rise ( $\Delta T$ ) at the lead end (soldering point) as a function of dissipated power at various lead lengths after mounting.

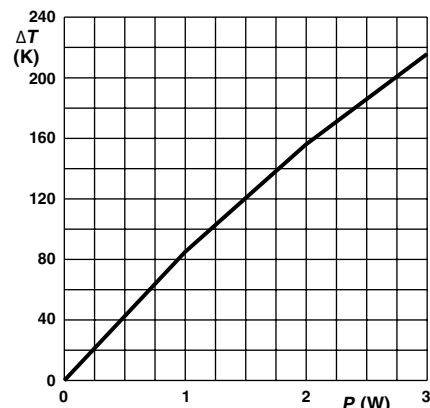

Ø 0.6 mm FeCu-leads


**PR03** Hot-spot temperature rise ( $\Delta T$ ) as a function of dissipated power.

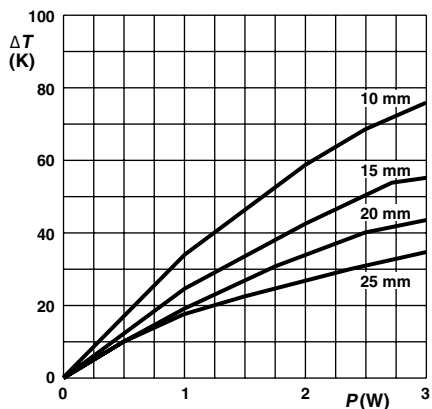

Ø 0.6 mm FeCu-leads

Minimum distance from resistor body to PCB = 1 mm


**PR03** Temperature rise ( $\Delta T$ ) at the lead end (soldering point) as a function of dissipated power at various lead lengths after mounting.

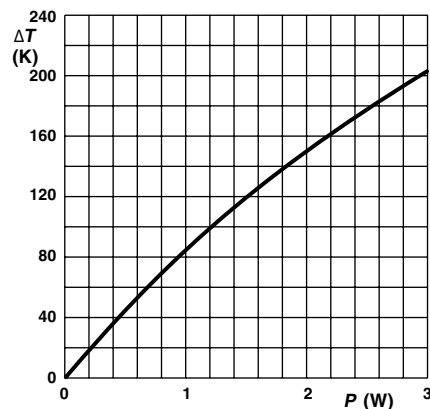

Ø 0.8 mm FeCu-leads

**PR03** Hot-spot temperature rise ( $\Delta T$ ) as a function of dissipated power.


## Application Information

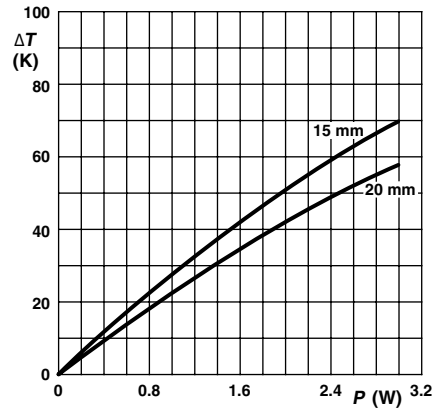


Ø 0.8 mm FeCu-leads

Minimum distance from resistor body to PCB = 1 mm

**PR03** Temperature rise ( $\Delta T$ ) at the lead end (soldering point) as a function of dissipated power at various lead lengths after mounting.

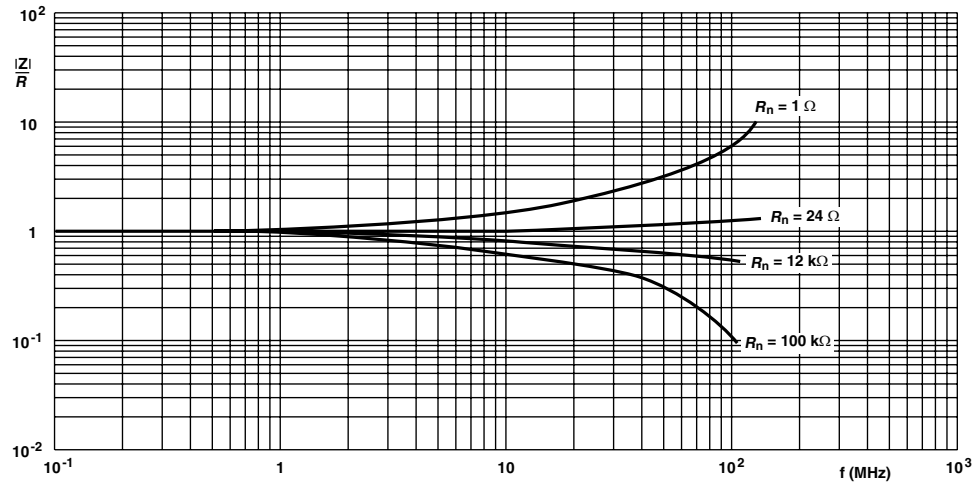


**PR01** Impedance as a function of applied frequency

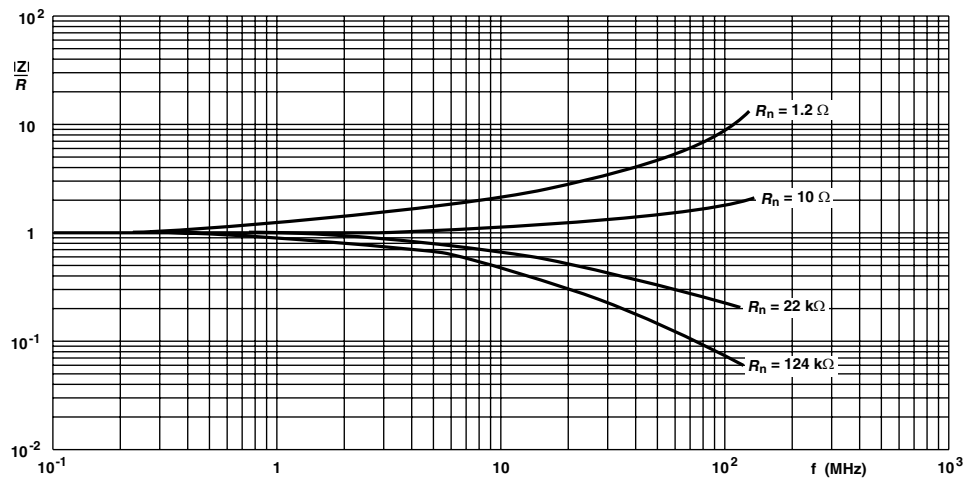

**PR02** Impedance as a function of applied frequency

## Application Information

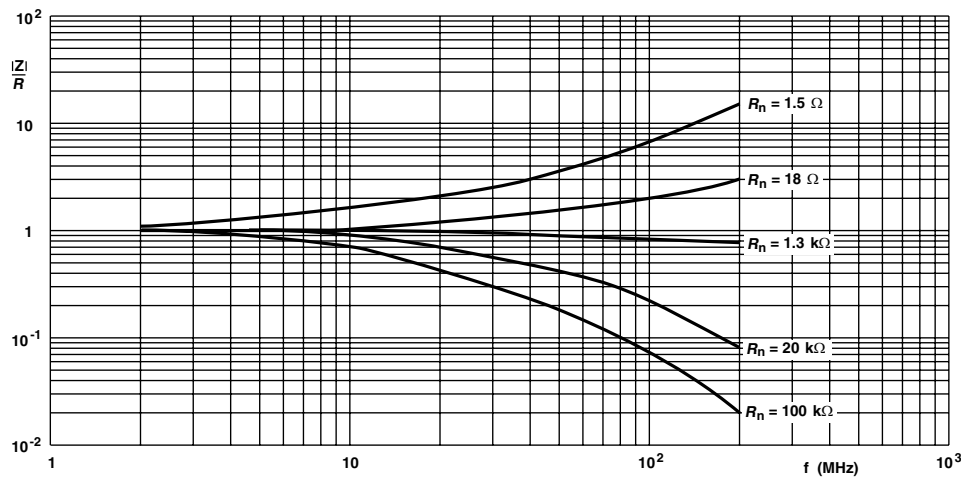

PR03 Impedance as a function of applied frequency

## Application Information

### TESTS AND REQUIREMENTS

Essentially all tests are carried out in accordance with IEC 60115-1 specification, category LCT/UCT/56 (rated temperature range: Lower Category Temperature, Upper Category Temperature; damp heat, long term, 56 days).

The tests are carried out in accordance with IEC 60068-2-xx Test Method under standard atmospheric conditions according to IEC 60068-1, 5.3.

In the Test Procedures and Requirements table, tests and requirements are listed with reference to the relevant clauses of IEC 60115-1 and IEC 60068-2-xx test methods. A short description of the test procedure is also given. In some instances deviations from the IEC recommendations were necessary for our method of specifying.

All soldering tests are performed with mildly activated flux.

| TEST PROCEDURES AND REQUIREMENTS |                         |                                                                 |                                                                                                                                                                                                                                                                                                                                                                          |                                               |
|----------------------------------|-------------------------|-----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|
| IEC 60115-1 CLAUSE               | IEC 60068-2-TEST METHOD | TEST                                                            | PROCEDURE                                                                                                                                                                                                                                                                                                                                                                | REQUIREMENTS                                  |
| 4.4.1                            |                         | Visual examination                                              |                                                                                                                                                                                                                                                                                                                                                                          | No holes; clean surface; no damage            |
| 4.4.2                            |                         | Dimensions (outline)                                            | Gauge (mm)                                                                                                                                                                                                                                                                                                                                                               | See Straight and Kinked Dimensions tables     |
| 4.5                              |                         | Resistance<br>(refer note on first page for measuring distance) | Applied voltage (+ 0 %/- 10 %):<br>$R < 10 \Omega$ : 0.1 V<br>$10 \Omega \leq R < 100 \Omega$ : 0.3 V<br>$100 \Omega \leq R < 1 \text{ k}\Omega$ : 1 V<br>$1 \text{ k}\Omega \leq R < 10 \text{ k}\Omega$ : 3 V<br>$10 \text{ k}\Omega \leq R < 100 \text{ k}\Omega$ : 10 V<br>$100 \text{ k}\Omega \leq R < 1 \text{ M}\Omega$ : 25 V<br>$R = 1 \text{ M}\Omega$ : 50 V | $R - R_{\text{nom}}$ : max. $\pm 5 \%$        |
| 4.18                             | 20 (Tb)                 | Resistance to soldering heat                                    | Thermal shock: 10 s; 260 °C; 3 mm from body                                                                                                                                                                                                                                                                                                                              | $\Delta R$ max.: $\pm (1 \% R + 0.05 \Omega)$ |
| 4.29                             | 45 (Xa)                 | Component solvent resistance                                    | Isopropyl alcohol or H <sub>2</sub> O followed by brushing                                                                                                                                                                                                                                                                                                               | No visual damage                              |

| TEST PROCEDURES AND REQUIREMENTS |                          |                                               |                                                                                                                                             |                                                                                                                                                                                                                                 |
|----------------------------------|--------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IEC 60115-1 CLAUSE               | IEC 60068-2- TEST METHOD | TEST                                          | PROCEDURE                                                                                                                                   | REQUIREMENTS                                                                                                                                                                                                                    |
| 4.17                             | 20 (Ta)                  | Solderability                                 | 2 s; 235 °C; Solder bath method; SnPb40<br>3 s; 245 °C; Solder bath method; SnAg3Cu0.5                                                      | Good tinning ( $\geq 95\%$ covered);<br>no damage                                                                                                                                                                               |
|                                  |                          | Solderability (after ageing)                  | 8 h steam or 16 h 155 °C;<br>leads immersed 6 mm:<br>for 2 s at 235 °C; solder bath (SnPb40)<br>for 3 s at 245 °C; solder bath (SnAg3Cu0.5) | Good tinning ( $\geq 95\%$ covered);<br>no damage                                                                                                                                                                               |
| 4.7                              |                          | Voltage proof on insulation                   | Maximum voltage $U_{RMS} = 500\text{ V}$<br>during 1 min; metal block method                                                                | No breakdown or flashover                                                                                                                                                                                                       |
| 4.16                             |                          | Robustness of terminations:                   |                                                                                                                                             |                                                                                                                                                                                                                                 |
| 4.16.2                           | 21 (Ua1)                 | Tensile all samples                           | Load 10 N; 10 s                                                                                                                             | Number of failures: $< 1 \times 10^{-6}$                                                                                                                                                                                        |
| 4.16.3                           | 21 (Ub)                  | Bending half number of samples                | Load 5 N; 4 x 90°                                                                                                                           | Number of failures: $< 1 \times 10^{-6}$                                                                                                                                                                                        |
| 4.16.4                           | 21 (Uc)                  | Torsion other half of samples                 | 3 x 360° in opposite directions                                                                                                             | No damage $\Delta R \text{ max.: } \pm (0.5\% R + 0.05\ \Omega)$                                                                                                                                                                |
| 4.20                             | 29 (Eb)                  | Bump                                          | 3 x 1500 bumps in three directions; 40 g                                                                                                    | No damage $\Delta R \text{ max.: } \pm (0.5\% R + 0.05\ \Omega)$                                                                                                                                                                |
| 4.22                             | 6 (Fc)                   | Vibration                                     | Frequency 10 Hz to 500 Hz;<br>displacement 1.5 mm or<br>acceleration 10 g; three directions; total 6 h<br>(3 x 2 h)                         | No damage<br>$\Delta R \text{ max.: } \pm (0.5\% R + 0.05\ \Omega)$                                                                                                                                                             |
| 4.19                             | 14 (Na)                  | Rapid change of temperature                   | 30 min at LCT and<br>30 min at UCT; 5 cycles                                                                                                | No visual damage<br><b>PR01:</b> $\Delta R \text{ max.: } \pm (1\% R + 0.05\ \Omega)$<br><b>PR02:</b> $\Delta R \text{ max.: } \pm (1\% R + 0.05\ \Omega)$<br><b>PR03:</b> $\Delta R \text{ max.: } \pm (2\% R + 0.05\ \Omega)$ |
| 4.23                             |                          | Climatic sequence:                            |                                                                                                                                             |                                                                                                                                                                                                                                 |
| 4.23.2                           | 2 (Ba)                   | Dry heat                                      | 16 h; 155 °C                                                                                                                                |                                                                                                                                                                                                                                 |
| 4.23.3                           | 30 (Db)                  | Damp heat (accelerated) 1 <sup>st</sup> cycle | 24 h; 55 °C; 90 % to 100 % RH                                                                                                               |                                                                                                                                                                                                                                 |
| 4.23.4                           | 1 (Aa)                   | Cold                                          | 2 h; - 55 °C                                                                                                                                |                                                                                                                                                                                                                                 |
| 4.23.5                           | 13 (M)                   | Low air pressure                              | 2 h; 8.5 kPa; 15 °C to 35 °C                                                                                                                |                                                                                                                                                                                                                                 |
| 4.23.6                           | 30 (Db)                  | Damp heat (accelerated) remaining cycles      | 5 days; 55 °C; 95 % to 100 % RH                                                                                                             | $R_{ins} \text{ min.: } 10^3\text{ M}\Omega$<br>$\Delta R \text{ max.: } \pm (1.5\% R + 0.1\ \Omega)$                                                                                                                           |
| 4.24                             | 78 (Cab)                 | Damp heat (steady state)                      | 56 days; 40 °C; 90 % to 95 % RH;<br>loaded with 0.01 $P_{70}$ (Steps: 0 V to 100 V)                                                         | $R_{ins} \text{ min.: } 1000\text{ M}\Omega$<br>$\Delta R \text{ max.: } \pm (3\% R + 0.1\ \Omega)$                                                                                                                             |
| 4.25.1                           |                          | Endurance (at 70 °C)                          | 1000 h; loaded with $P_{70}$ or $U_{max.}$ ;<br>1.5 h ON and 0.5 h OFF                                                                      | $\Delta R \text{ max.: } \pm (5\% R + 0.1\ \Omega)$                                                                                                                                                                             |
| 4.8                              |                          | Temperature coefficient                       | Between - 55 °C and + 155 °C                                                                                                                | $\leq \pm 250\text{ ppm/K}$                                                                                                                                                                                                     |
| 4.6.1.1                          |                          | Insulation resistance                         | Maximum voltage (DC) after 1 min; metal block method                                                                                        | $R_{ins} \text{ min.: } 10^4\text{ M}\Omega$                                                                                                                                                                                    |

## 12NC INFORMATION FOR HISTORICAL CODING REFERENCE

The resistors have a 12-digit numeric code starting with 23

For 5 % tolerance:

- The next 7 digits indicate the resistor type and packing
- The remaining 3 digits indicate the resistance value:
  - The first 2 digits indicate the resistance value
  - The last digit indicates the resistance decade

For 1 % tolerance:

- The next 6 digits indicate the resistor type and packing
- The remaining 4 digits indicate the resistance value:
  - The first 3 digits indicate the resistance value
  - The last digit indicates the resistance decade

## Last Digit of 12NC Indicating Resistance Decade

| RESISTANCE DECADE     | LAST DIGIT |
|-----------------------|------------|
| 0.22 to 0.91 $\Omega$ | 7          |
| 1 to 9.76 $\Omega$    | 8          |
| 10 to 97.6 $\Omega$   | 9          |
| 100 to 976 $\Omega$   | 1          |
| 1 to 9.76 k $\Omega$  | 2          |
| 10 to 97.6 k $\Omega$ | 3          |
| 100 to 976 k $\Omega$ | 4          |
| 1 M $\Omega$          | 5          |

## 12NC Example

The 12NC for resistor type PR02 with Cu leads and a value of 750  $\Omega$  with 5 % tolerance, supplied on a bandolier of 1000 units in ammopack, is: 2306 198 53751.

| 12NC - Resistor Type and Packaging <sup>(1)</sup> |                          |            |                         |              |                     |                     |                     |                     |                       |
|---------------------------------------------------|--------------------------|------------|-------------------------|--------------|---------------------|---------------------|---------------------|---------------------|-----------------------|
| TYPE                                              | LEAD $\varnothing$<br>mm | TOL<br>(%) | 23.. ... .. (BANDOLIER) |              |                     |                     |                     |                     |                       |
|                                                   |                          |            | AMMOPACK                |              |                     |                     |                     | REEL                |                       |
|                                                   |                          |            | RADIAL TAPED            |              | STRAIGHT LEADS      |                     |                     | RADIAL TAPED        |                       |
|                                                   |                          |            | 4000 units              | 3000 units   | 52 mm<br>5000 units | 52 mm<br>1000 units | 63 mm<br>500 units  | 52 mm<br>5000 units | 2000 units            |
| PR01                                              | Cu 0.6                   | 1          | -                       | -            | <b>22 196 1...</b>  | 06 191 2...         | -                   | 06 191 5...         | -                     |
|                                                   |                          | 5          | <b>06 197 03...</b>     | -            | <b>22 193 14...</b> | 06 197 53...        | -                   | <b>06 197 23...</b> | -                     |
| PR02                                              | Cu 0.8                   | 1          | -                       | 22 197 2...  | -                   | <b>22 197 1...</b>  | -                   | 06 192 5...         | <b>2322 197 5...</b>  |
|                                                   |                          | 5          | -                       | 06 198 03... | -                   | <b>06 198 53...</b> | -                   | <b>06 198 23...</b> | <b>2322 198 04...</b> |
|                                                   | FeCu 0.6                 | 5          | -                       | -            | -                   | 22 194 54...        | -                   | -                   | -                     |
| PR03                                              | Cu 0.8                   | 5          | -                       | -            | -                   | -                   | <b>22 195 14...</b> | -                   | -                     |
|                                                   |                          | 1          | -                       | -            | -                   | -                   | <b>06 199 6...</b>  | -                   | -                     |
|                                                   | FeCu 0.6                 | 5          | -                       | -            | -                   | -                   | <b>22 195 54...</b> | -                   | -                     |

## Notes

<sup>(1)</sup> Other packaging versions are available on request

- Preferred types in bold

| 12NC - Resistor Type and Packaging |                          |            |                            |                 |                                    |                                    |
|------------------------------------|--------------------------|------------|----------------------------|-----------------|------------------------------------|------------------------------------|
| TYPE                               | LEAD $\varnothing$<br>mm | TOL<br>(%) | 23.. ... .. (LOOSE IN BOX) |                 |                                    |                                    |
|                                    |                          |            | DOUBLE KINK                |                 |                                    |                                    |
|                                    |                          |            | PITCH = 17.8 mm            | PITCH = 25.4 mm | PITCH <sup>(2)(3)(4)</sup>         |                                    |
|                                    |                          |            | 1000 units                 | 500 units       | 1000 units                         | 500 units                          |
| PR01                               | Cu 0.6                   | 5          | 22 193 03...               | -               | -                                  | -                                  |
|                                    | FeCu 0.6                 | 5          | 22 193 43...               | -               | <b>22 193 53...</b> <sup>(2)</sup> | -                                  |
| PR02                               | Cu 0.8                   | 5          | 22 194 23...               | -               | -                                  | -                                  |
|                                    | FeCu 0.6                 | 5          | 22 194 83...               | -               | -                                  | -                                  |
|                                    | FeCu 0.8                 | 5          | -                          | -               | <b>22 194 63...</b> <sup>(3)</sup> | -                                  |
| PR03                               | Cu 0.8                   | 5          | -                          | 22 195 23...    | -                                  | -                                  |
|                                    | FeCu 0.6                 | 5          | -                          | 22 195 83...    | -                                  | -                                  |
|                                    | FeCu 0.8                 | 5          | -                          | -               | -                                  | <b>22 195 63...</b> <sup>(4)</sup> |

## Notes

<sup>(2)</sup> PR01 pitch 12.5 mm

<sup>(3)</sup> PR02 pitch 15.0 mm

<sup>(4)</sup> PR03 pitch 20.0 mm, with reversed kinking direction as opposed to the drawing for the type with double kink figure

- Preferred types in bold



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**