

BMP-2541M-RA-12G

2.54mm PIN HEADER

Single row

Angle "A" Type

Dip



Electrical


ITEM	SPEC
정격전압 [Voltage Rating]	250V AC max
정격전류 [Current Rating]	1A max
접촉저항 [Contact Resistance]	30MΩ max
내전압 [Dielectric Withstanding Voltage]	1000V AC/ min
절연저항 [Insulation resistance]	1000MΩ min
사용온도 [Operating Temperature]	-40℃ ~ +105℃

Physical

I/NO	DESCRIPTION	MATERIAL
1	Insulator	PA66, UL94V-0
2	Pin	Brass
	Plating	Au



Dimension Table

구분	Dim.
A	2.54*No. of Pin
B	2.54*(N-1)
Circuits	1 ~ 40

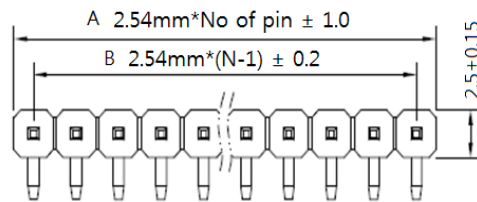

Dimension Table

구분	Dim.	(표준)
PA	사용자 지정	3.5
PB	사용자 지정	4.4
PC	사용자 지정	3.5

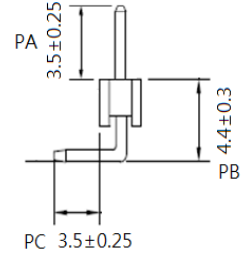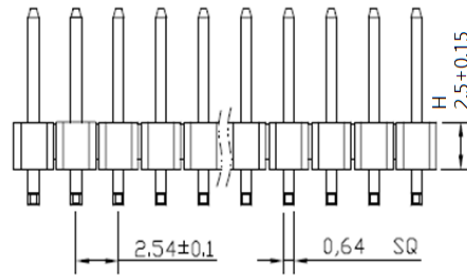

Insulator Height

구분	Dim.
H	2.5

메 모