



BN 3333 - DIN 965 A - ~ISO 7046

Cross recessed flat countersunk
head screws
Pozidriv Z

DIN 965 A
~ISO 7046
~UNI 7688

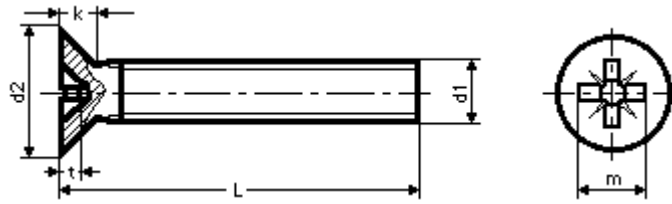

Material	Steel	Quality	4.8
Surface	zinc plated blue	Tensile strength	400 N/mm ²

Art No.	Dim 1	Dim 2	Unit	Quantity in pieces	 The prices are only available for registered users.
11 1536885	M2,5	6		200	
12 1536893	M2,5	8		200	
13 1536907	M2,5	10		200	
14 1536915	M2,5	12		200	
15 2097052	M2,5	16		200	
16 2097060	M2,5	20		200	
17 2097079	M3	4		200	
18 1536923	M3	5		200	
19 1536931	M3	6		200	
20 1536958	M3	8		200	

DIN 965 A: Standard withdrawn
DIN 965 A Phillips cross recess (Type H) see BN 388, BN 8167.
All lengths fully threaded.

Mileparken 10 2740 Skovlunde Denmark | Phone +45 44 50 88 88 | Fax +45 44 50 88 01