



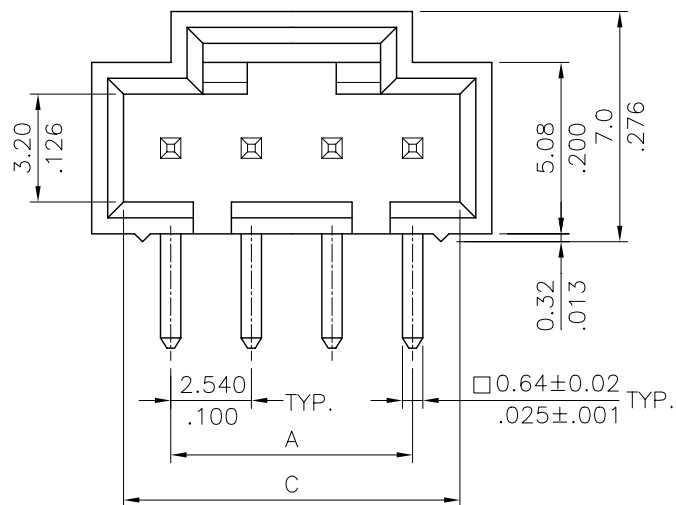

For 4 Through 18 Circuits

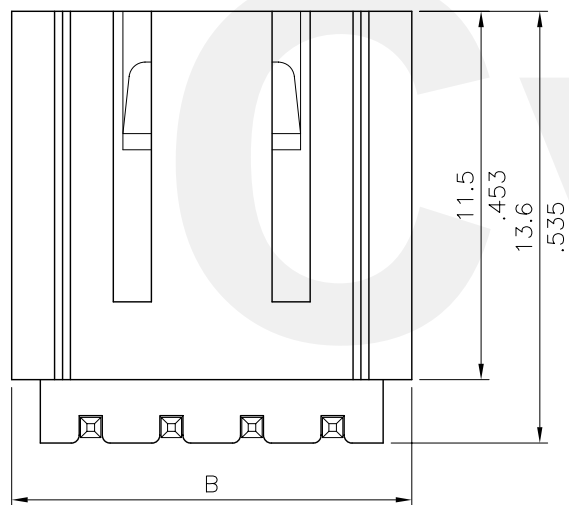


A = 2.54 x No. of Spaces


B = A + 5.1

C = A + 2.98

* Available in 2 through 18 circuits

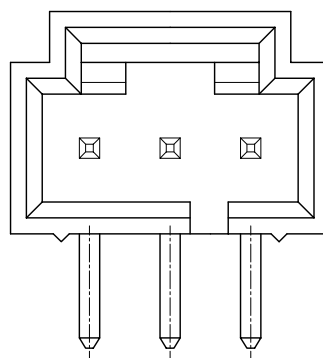

For 3 Circuits

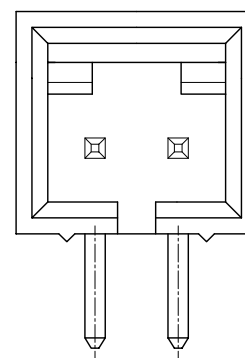

For 2 Circuits

Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Brass

Ordering Code:

CI33 ** P 1 H 1 0
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Circuits

③ Contact type: P= Pin header

④ Plating option:

1= 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel

2= Gold flash plated over
1.27μm(50μ") Nickel


3= 0.38μm(15μ") Gold plated
over 1.27μm(50μ") Nickel

4= 0.76μm(30μ") Gold plated
over 1.27μm(50μ") Nickel

⑤ Tail Style: H= Right angle

⑥ Color: 1= Black

⑦ Option:

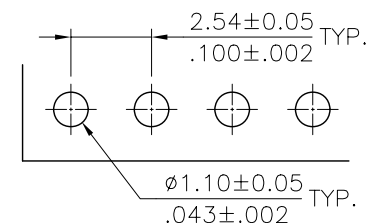

Recommended P.C. Board Layout

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 2.54MM(.100") RIGHT ANGLE HEADER	 瀚荃股份有限公司 CviLux Corporation			
3					2002.05.20 ISSUED	UNLESS OTHERWISE SPECIFIED					
2					DRAWN BY: Eisley	05/20-02'		MATERIAL:	DRAWING NO. CI3302SD	PART NO. CI33**P*H10	SHEET 1 OF 1
1					ENGINEER: David	05/20-02'	.X ± 0.30/.012 X' ± 1'				
					CHECKED BY: David	05/20-02'	.XX ± 0.20/.008 X' ±	FINISH:	SCALE 4 / 1		
					APPROVED BY: Alex	05/20-02'	.XXX ± 0.10/.004 XX' ±				
SYM	NAME	DATE	REVISIONS								