




Floating Clinch Nuts

Series CFAS & CFAC



CFAS & CFAC floating clinch nuts provide a self-clinching fastener with a floating nut that compensates for mating misalignments to .030 inches (.8 mm).

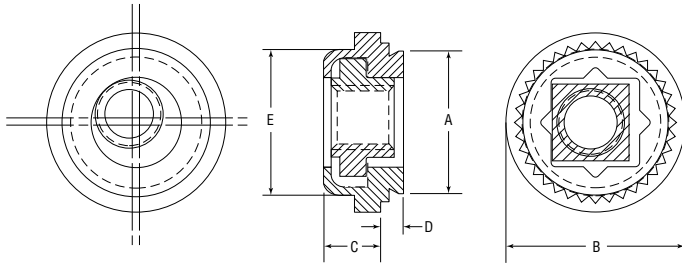

Series	Material	Finish
CFAS	Heat-treated Carbon Steel	Zinc* Clear
CFAC	300 Series Stainless Steel	Passivated ASTM A380

*See Finish Spec. on Page 6.

Thread: Internal 2B, ANSI B1.1 (6H, ANSI/ASME B1.13M).

Float: .015 in. (.4mm) minimum in all directions from center, .030 in. (.8mm) total.

STARBURST® design indicates genuine Captive self-clinching Floating Nut. Use in: Materials with Rockwell Hardness of B-70 or less.

Dimensions & Specifications

Thread Size	Part Number		D Max.	Min.	+ .003 in. (.08mm) - .000 (.00)	A Max.	E Max.	B ± .015 in. (± .4mm)	C Max.	Min.
	Carbon Steel	Stainless Steel								
#4-40	CFAS440-1	CFAC440-1	.038	.040	.290	.289	.290	.36	.13	.30
	CFAS440-2	CFAC440-2	.054	.056						
#6-32	CFAS632-1	CFAC632-1	.038	.040	.328	.327	.335	.39	.13	.32
	CFAS632-2	CFAC632-2	.054	.056						
#8-32	CFAS832-1	CFAC832-1	.038	.040	.368	.367	.365	.44	.13	.34
	CFAS832-2	CFAC832-2	.054	.056						
#10-24	CFAS1024-1	CFAC1024-1	.038	.040	.406	.405	.405	.47	.16	.36
	CFAS1024-2	CFAC1024-2	.054	.056						
#10-32	CFAS1032-1	CFAC1032-1	.038	.040	.515	.514	.510	.60	.21	.42
	CFAS1032-2	CFAC1032-2	.054	.056						
1/4-20	CFAS420-2†	CFAC420-2†	.054	.056	.515	.514	.510	.60	.21	.42
1/4-28	CFAS428-2†	CFAC428-2†	.054	.056						
M3 x 0.5	CFASM3-1	CFACM3-1	.97	1.0	7.37	7.35	7.37	9.1	3.3	7.6
	CFASM3-2	CFACM3-2	1.37	1.4						
M4 x 0.7	CFASM4-1	CFACM4-1	.97	1.0	9.35	9.33	9.28	11.2	3.3	8.6
	CFASM4-2	CFACM4-2	1.37	1.4						
M5 x 0.8	CFASM5-1	CFACM5-1	.97	1.0	10.31	10.29	10.29	11.9	4.3	9.0
	CFASM5-2	CFACM5-2	1.37	1.4						
M6 x 1.0	CFASM6-2†	CFACM6-2†	1.37	1.4	13.08	13.06	12.96	15.3	5.3	11.0

†Not stocked, available on special order.

Continued on next page.



Floating Clinch Nuts

Series CFAS & CFAC



Continued from previous page

Installation & Performance Data

Thread Size	Shank	Cold-rolled Steel			2024-T3 Aluminum			5052-H34 Aluminum			
		Installation Force (tons)	Pushout (lbs.)	Torque-out (in.-lbs.)	Installation Force (tons)	Pushout (lbs.)	Torque-out (in.-lbs.)	Installation Force (tons)	Pushout (lbs.)	Torque-out (in.-lbs.)	
INCH (in.)	#4-40	-1	1 – 2	300	85	1 – 2	220	65	.5 – .75	215	65
		-2	1 – 2	300	150	1 – 2	225	150	1	225	80
	#6-32	-1	1 – 2	300	150	1 – 2	235	110	1	240	140
		-2	1 – 2	300	175	1 – 2	275	150	1	250	150
	#8-32	-1	1 – 2	300	150	1 – 2	240	110	1	250	140
		-2	1 – 2	400	200	1 – 2	300	150	1	265	150
	#10-24	-1	1	400	150	1 – 2	300	150	1	300	150
-2		2	450	200	1 – 2	300	200	1	350	175	
#10-32	-1	1	400	150	1 – 2	300	150	1	300	150	
	-2	2	450	200	1 – 2	300	200	1	350	175	
1/4-20 1/4-28	-2	2 – 3	500	325	2 – 3	300	325	1 – 2	400	325	
Thread Size	Shank	Installation Force (kN)	Pushout (N)	Torque-out (N•m)	Installation Force (kN)	Pushout (N)	Torque-out (N•m)	Installation Force (kN)	Pushout (N)	Torque-out (N•m)	
METRIC (mm)	M3	-1	13	1330	9	13	970	7	7	950	7
		-2	13	1330	16	13	1000	17	9	1000	9
	M4	-1	13	1330	16	13	1050	12	9	1100	16
		-2	13	1775	22	13	1330	17	9	1178	17
	M5	-1	15	1775	16	15	1330	17	9	1330	17
		-2	15	2000	22	15	1330	22	9	1550	22
M6	-2	22	2220	36	22	1330	36	13	1780	36	