

How to Order Die-Cut CHO-THERM® Insulators

Standard die-cut parts are ordered using the following Part Number System.

For custom parts contact Chomerics.

WW

60 = Standard
die-cut part

XX






11 = No PSA
12 = PSA one side

YYYY








**Standard
Configuration
Drawing Number**

ZZZZ

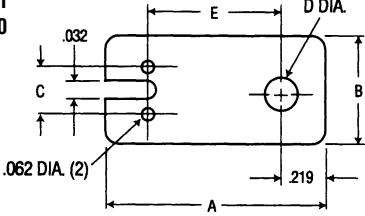





CHO-THERM® Material
Example: 1671, T500, etc.

RECOMMENDED SCREW/TORQUE	CONFIGURATION	DIMENSIONS (INCHES)										ORDERING NUMBER PART NUMBER
		A	B	C	D	E	F	G	H	I		
#4-40 5 in-lb #6-32 6 in-lb	T0-3 	1.563	1.050	.140	.080							WW-XX-D065-ZZZZ
		1.563	1.050	.140	.140							WW-XX-4305-ZZZZ
		1.593	1.100	.156	.070							WW-XX-4511-ZZZZ
		1.650	1.065	.140	.046							WW-XX-D370-ZZZZ
		1.650	1.140	.122	.062							WW-XX-D371-ZZZZ
		1.650	1.140	.140	.093							WW-XX-6875-ZZZZ
		1.650	1.140	.165	.062							WW-XX-D372-ZZZZ
		1.650	1.140	.140	.046							WW-XX-D373-ZZZZ
		1.650	1.140	.165	—							WW-XX-D374-ZZZZ
		1.700	1.187	.156	.062							WW-XX-4996-ZZZZ
		1.730	1.250	.156	.062							WW-XX-5442-ZZZZ
		1.780	1.250	.140	.093							WW-XX-D375-ZZZZ
		1.780	1.250	.165	.094							WW-XX-D376-ZZZZ
		1.780	1.250	.140	.046							WW-XX-D377-ZZZZ
		2.07	1.56	.122	.062							WW-XX-D378-ZZZZ
#4-40 5 in-lb #6-32 6 in-lb	3 LEAD T0-3 	1.65	1.140	.140	.093	1.187	.430					WW-XX-D379-ZZZZ
#4-40 5 in-lb #6-32 6 in-lb	4 LEAD T0-3 	1.560	1.050	.158	.080	1.170					WW-XX-D380-ZZZZ WW-XX-D381-ZZZZ	
		1.563	1.050	.156	.063	1.187						
#4-40 5 in-lb #6-32 6 in-lb	8 LEAD T0-3 	1.655	1.187	.156	.060							WW-XX-D382-ZZZZ
#4-40 5 in-lb #6-32 6 in-lb	10 LEAD T0-3 	1.650	1.140	.165	.040							WW-XX-D383-ZZZZ

(1 in-lb = 1.152 kg-cm)

RECOMMENDED SCREW/TORQUE	CONFIGURATION	DIMENSIONS (INCHES)									ORDERING NUMBER PART NUMBER	
		A	B	C	D	E	F	G	H	I		
#4-40 3 in-lb #6-32 4 in-lb	T0-66 	1.250	.700	.140	.062						WW-XX-4353-ZZZZ WW-XX-5527-ZZZZ WW-XX-4997-ZZZZ WW-XX-D384-ZZZZ	
		1.312	.762	.140	.062							
		1.375	.825	.140	.062							
		1.440	1.000	.140	.075							
#4-40 3 in-lb #6-32 4 in-lb	3 LEAD T0-66 	1.275	.750	.156	.100	.960					WW-XX-D385-ZZZZ	
#4-40 3 in-lb #6-32 4 in-lb	4 LEAD T0-66 	1.312	.762	.140	.062	.960	.200	.100			WW-XX-D386-ZZZZ	
#4-40 3 in-lb #6-32 4 in-lb	9 LEAD T0-66 	1.440	1.000	.140	.055	.960	.480	.325			WW-XX-D387-ZZZZ	
#4-40 3 in-lb #6-32 4 in-lb	MULTI LEAD T0-66 	1.35	.800	.140	.400						WW-XX-D388-ZZZZ	
#4-40 2 in-lb	T0-220 	.437	.312	.140	.093						WW-XX-D389-ZZZZ WW-XX-D390-ZZZZ WW-XX-D391-ZZZZ WW-XX-D392-ZZZZ WW-XX-5791-ZZZZ WW-XX-8302-ZZZZ WW-XX-D393-ZZZZ WW-XX-8531-ZZZZ WW-XX-6956-ZZZZ WW-XX-D394-ZZZZ WW-XX-D395-ZZZZ WW-XX-D396-ZZZZ WW-XX-D397-ZZZZ WW-XX-D398-ZZZZ WW-XX-D399-ZZZZ WW-XX-D400-ZZZZ WW-XX-D401-ZZZZ	
		.437	.312	.140	.122							
		.500	.385	.170	.120							
		.610	.560	.245	.125							
		.687	.562	.218	.125							
		.710	.500	.160	.141							
		.750	.410	.225	.156							
		.750	.500	—	—							
		.750	.500	.187	.147							
		.750	.500	.187	.125							
		.750	.600	.240	.150							
		.750	.600	.240	.115							
		.855	.562	.218	.125							
		.855	.630	.230	.093							
		.860	.740	.200	.160							
		1.125	.625	.200	.145							
		1.410	.810	.355	.147							
#4-40 2 in-lb		.910	.500	.200	.125	.580	.046	.265			WW-XX-D402-ZZZZ WW-XX-D403-ZZZZ	
		.983	.750	.432	.156	.665	.101	.217				

(1 in-lb = 1.152 kg-cm)

RECOMMENDED SCREW/TORQUE	CONFIGURATION	DIMENSIONS (INCHES)									ORDERING NUMBER PART NUMBER	
		A	B	C	D	E	F	G	H	I		
#4-40 2 in-lb	TYPE II TO-220 	1.00	.500	.200	.141	.626					WW-XX-4969-ZZZZ	
#10-32 2 in-lb #25-28 7 in-lb	DIODE WASHERS DO-4 DO-5 	.360	.260								WW-XX-D404-ZZZZ	
		.510	.140								WW-XX-D405-ZZZZ	
		.510	.200								WW-XX-D406-ZZZZ	
		.512	.161								WW-XX-D407-ZZZZ	
		.625	.195								WW-XX-4659-ZZZZ	
		.750	.125								WW-XX-D408-ZZZZ	
		.800	.190								WW-XX-D409-ZZZZ	
		.800	.260								WW-XX-D410-ZZZZ	
		.812	.115								WW-XX-D411-ZZZZ	
		.812	.145								WW-XX-D412-ZZZZ	
		.875	.313								WW-XX-D413-ZZZZ	
		1.000	.140								WW-XX-D414-ZZZZ	
		1.000	.255								WW-XX-4661-ZZZZ	
		1.180	.515								WW-XX-D415-ZZZZ	
		1.250	.380								WW-XX-D416-ZZZZ	
		1.500	.200								WW-XX-D417-ZZZZ	
		1.500	.500								WW-XX-D418-ZZZZ	
		TO-36 	1.063	.690	.200							WW-XX-4306-ZZZZ
		TO-5 and TO-18 3 holes 	.250	.100	.036							WW-XX-D419-ZZZZ
			.360	.200	.040							WW-XX-4374-ZZZZ
			.390	.200	.040							WW-XX-D420-ZZZZ
		4 holes	.250	.100	.036							WW-XX-D421-ZZZZ
			.360	.200	.040							WW-XX-D422-ZZZZ
		.390	.200	.040							WW-XX-D423-ZZZZ	
#4-40 2 in-lb	RECTIFIER 	.100	.100	.187							WW-XX-D424-ZZZZ	
		1.125	1.125	.140							WW-XX-D425-ZZZZ	
		1.250	1.250	.200							WW-XX-D426-ZZZZ	
#4-40 2 in-lb	TIP PACKAGE 	.865	.650	.650	.140						WW-XX-5792-ZZZZ	
		.865	.650	.650	.140						WW-XX-D427-ZZZZ	
		.984	.787	—	—						WW-XX-D428-ZZZZ	
		.984	.787	.708	.142						WW-XX-D429-ZZZZ	
		1.260	.787	.984	.142						WW-XX-D430-ZZZZ	

(1 in-lb = 1.152 kg-cm)