


D-Sub Connector
Solder pin straight
with threaded rear spacer
and front threaded lock
4-40 UNC - M3 (mixed thread)



(click on the schematic(s) for a more detailed view)

Socket connector

Plug connector

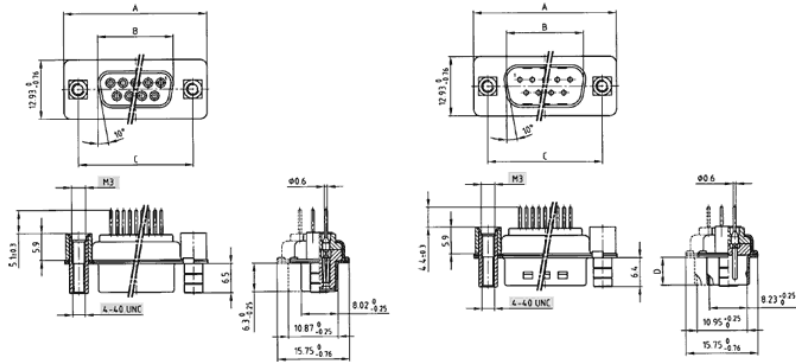

No.of Pos.	A ±0.76	B ±0.25	C
9	31,19	16,46	25,00 ^{+0,12} / _{-0,13}
15	39,52	24,79	33,30 ^{+0,15} / _{-0,16}
25	53,42	38,50	47,04 ^{+0,13}
37	69,70	54,96	63,50 ^{+0,13}
50	67,31	52,55	61,10 ^{+0,14} / _{-0,11}

No.of Pos.	A ±0.76	B ±0.25	C	D ±0.3
9	31,19	16,46	25,00 ^{+0,12} / _{-0,13}	6,12
15	39,52	24,79	33,30 ^{+0,15} / _{-0,16}	6,12
25	53,42	38,50	47,04 ^{+0,13}	5,99
37	69,70	54,96	63,50 ^{+0,13}	5,99
50	67,31	52,55	61,10 ^{+0,14} / _{-0,11}	5,99

Part Numbers

No.of Pos.	Socket connector tin plated
	UNC 4 - 40 / M 3
9	164 A 12919 X
15	164 A 12929 X
25	164 A 12939 X
37	164 A 12949 X
50	164 A 12959 X

No.of Pos.	Plug connector tin-plated with ground indent
	UNC 4 - 40 / M 3
9	163 A 14439 X
15	163 A 14449 X
25	163 A 14459 X
37	163 A 14469 X

50	163 A 14479 X
----	---------------



REG.-Nr. 40000440



File # E202784



File # LR115000

[Back](#)

Search for CONEC Part # [Find Now](#)