

# COM Express® Basic Type 6 Module

## conga-TS77

Highest Performance COM Express Type 6

3rd Generation Intel® Core™ processor-based platform


Better transcode HD-HD, HD Video Conferencing

Improved Graphics Performance, DirectX®11



Formfactor	Formfactor COM Express™ Basic, (95 x 125 mm), Type 6 Connector Layout
CPU	Intel® Core™ i7-3615QE (4x 2.3 GHz, 6MB Cache, TDP 45W) Intel® Core™ i7-3612QE (4x 2.1 GHz, 6MB Cache, TDP 35W) Intel® Core™ i7-3555LE (2x 2.5 GHz, 4MB Cache, TDP 25W) Intel® Core™ i7-3517UE (2x 1.7 GHz, 4MB Cache, TDP 17W) Intel® Core™ i5-3610ME (2x 2.7 GHz, 3MB Cache, TDP 35W) Intel® Core™ i3-3120ME (2x 2.4 GHz, 3MB Cache, TDP 35W) Intel® Core™ i3-3217UE (2x 1.6 GHz, 3MB Cache, TDP 17W) Intel® Celeron® 847E (2x 1.1 GHz, 2 MB Cache, 17 W) Intel® Celeron® 827E (1x 1.4 GHz, 1.5 MB Cache, 17 W) Intel® Celeron® 1020E (2x 2.2 GHz, 2 MB Cache, 35 W) Intel® Celeron® 1047UE (2x 1.4 GHz, 2 MB Cache, 17 W) Intel® Celeron® 927UE (1x 1.5 GHz, 1 MB Cache, 17 W) Intel® Turbo Boost Technology 2.0, Intel® Hyper-Threading Technology, Integrated dual channel memory controller, up to 25.6 GByte/sec. memory bandwidth Integrated Intel® HD Graphics 4000 with dynamic frequency up to 1.0GHz, Intel® Clear Video HD Technology
DRAM	2 Sockets, SO-DIMM DDR3 up to 1600MT/s and 16 GByte
Chipset	Mobile Intel® 7 Series Chipset: Intel® BD82QM77 PCH (Intel® BD82HM76 PCH for Intel® Celeron® equipped modules)
Ethernet	Intel® 82579 GbE LAN Controller with AMT 8.0 support
I/O Interfaces	7x PCI Express™ GEN. 2.0 lanes, 1x PEG GEN 3.0 (8GT/s), 2x Serial ATA® with 6 Gb/s, 2x Serial ATA® with 3 Gb/s, RAID 0/1/5/10 support, 2x ExpressCard®, 4x USB 3.0 (XHCI), 8x USB 2.0 (EHCI), LPC bus, I²C bus (fast mode, 400 kHz, multi-master)
Sound	Digital High Definition Audio Interface with support for multiple audio codecs
Graphics	Intel® Flexible Display Interface (FDI), OpenCL 1.1, OpenGL 3.1 and DirectX11 support, Three simultaneous independent displays. High performance hardware MPEG-2 decoding, WMV9 (VC-1) and H.264 (AVC) support Blu-ray support @ 40 MBit/s, hardware motion compensation
LVDS	Dual channel LVDS transmitter, Supports flat panels 2x24 Bit interface, VESA mappings, resolutions up to 1920x1200, Automatic Panel Detection via EDID/EPI
Digital Display Interface (DDI)	1x SDVO / DisplayPort 1.1 / TMDS (DVI, HDMI) 2x DisplayPort 1.1 / TMDS (DVI, HDMI)
CRT Interface	340.4 MHz RAMDAC, resolutions up to QXGA (2048x1536 @75Hz)
congatec Board Controller	Multi Stage Watchdog, non-volatile User Data Storage, Manufacturing and Board Information, Board Statistics, BIOS Setup Data Backup, I²C bus (fast mode, 400 kHz, multi-master), Power Loss Control
Embedded BIOS Features	AMI Aptio® UEFI 2.x firmware, 8 MByte serial SPI firmware flash
Security	The conga-TS77 can be optionally equipped with a discrete "Trusted Platform Module" (TPM). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e commerce will benefit also with improved authentication, integrity and confidence levels.
Power Management	ACPI 4.0 with battery support
Operating Systems	Microsoft® Windows 8, Microsoft® Windows 7, Linux, Microsoft® Windows® embedded Standard
Power Consumption	Typ. application: tbd., see manual for full details, CMOS Battery Backup
Temperature:	Operating: 0 .. +60°C Storage: -20 .. +80°C
Humidity Operating:	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.
Size	95 x 125 mm (3.74" x 4.92")

# conga-TS77 - Block diagram

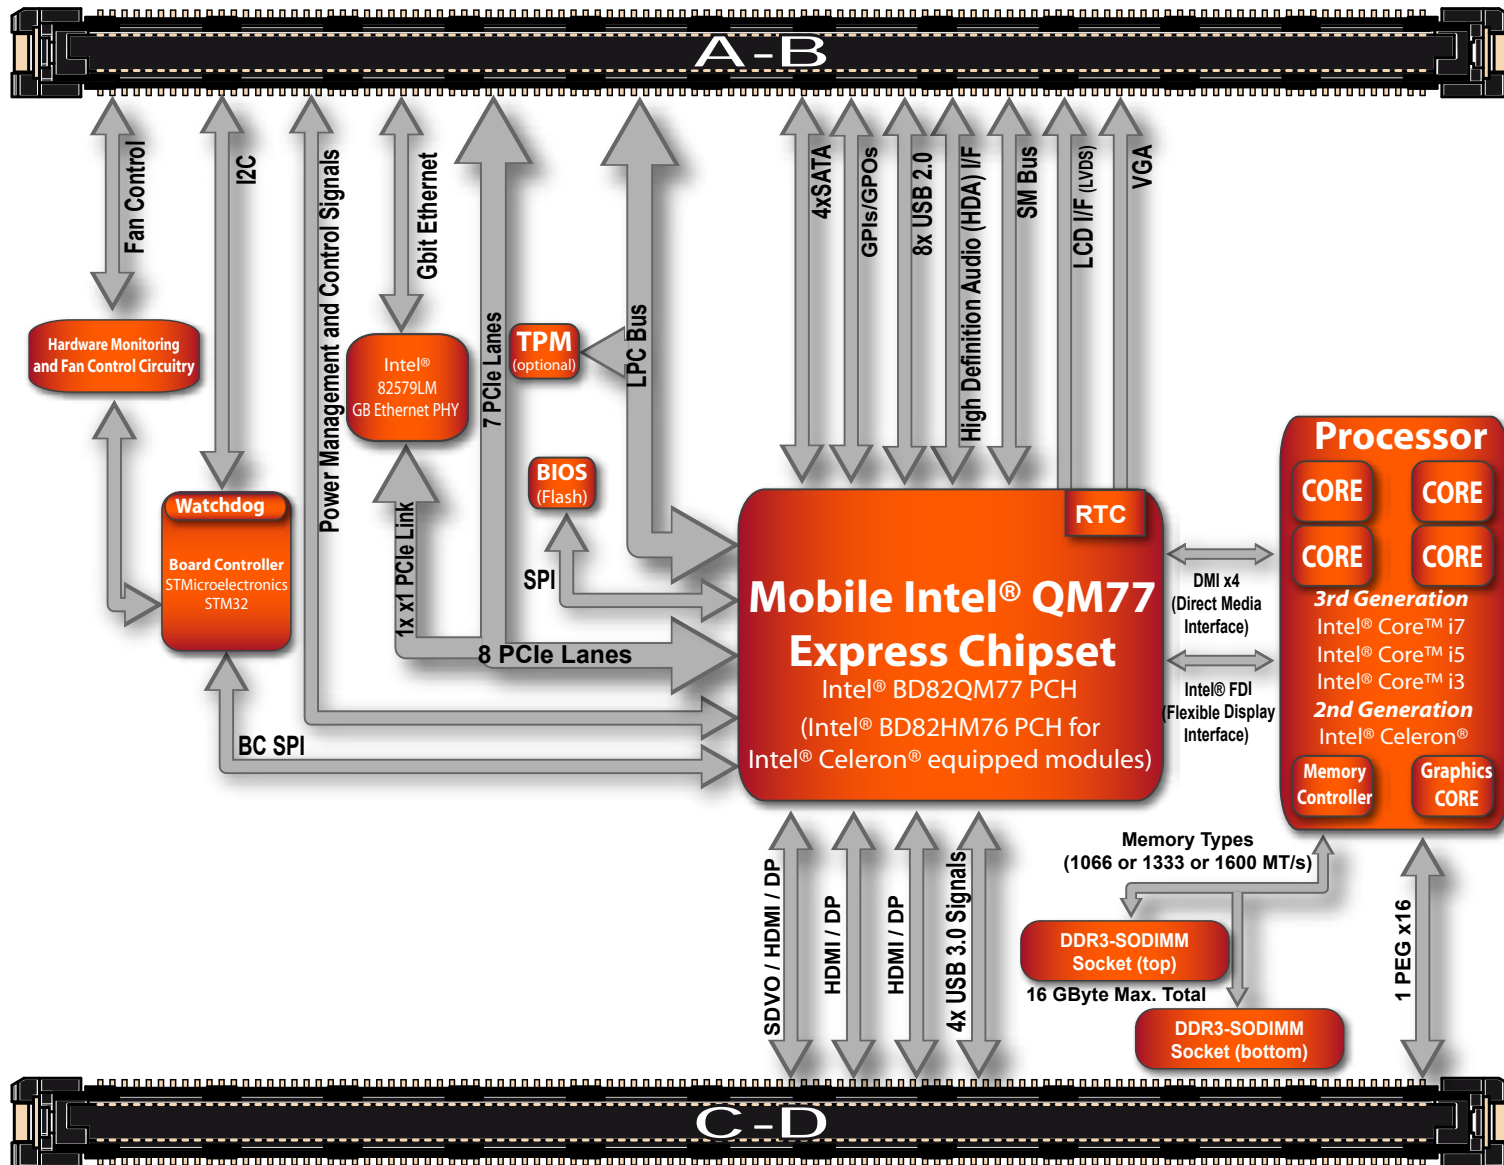

# conga-TS77 - Order information

Article	PN	Description
conga-TS77/i7-3615QE	046506	COM Express Type 6 Basic modul with Intel® Core™ i7-3615QE quad core processor with 2.3GHz, 6MB L2 cachea and Processor TDP 45W.
conga-TS77/i7-3612QE	046501	COM Express Type 6 Basic modul with Intel® Core™ i7-3612QE quad core processor with 2.1GHz, 6MB L2 cache andProcessor TDP 35W.
conga-TS77/i7-3555LE	046502	COM Express Type 6 Basic modul with Intel® Core™ i7-3555LE dual core processor with 2.5GHz, 4MB L2 cache and Processor TDP 25W.
conga-TS77/i7-3517UE	046503	COM Express Type 6 Basic modul with Intel® Core™ i7-3517UE dual core processor with 1.7 GHz, 4MB L2 cache and Processor TDP 17W.
conga-TS77/i5-3610ME	046504	COM Express Type 6 Basic modul with Intel® Core™ i5-3610ME dual core processor with 2.7GHz, 3MB L2 cache and 1600MT/s dual channel DDR3 memory interface. Processor TDP 35W.
conga-TS77/i3-3120ME	046507	COM Express Type 6 Basic module with Intel® Core™ i3-3120ME dual core processor with 2.4GHz, 3MB L2 cache and 1600MT/s dual channel DDR3 memory interface. Processor TDP 35W.
conga-TS77/i3-3217UE	046505	COM Express Type 6 Basic module with Intel® Core™ i3-3217UE dual core processor with 1.6GHz, 3MB L2 cache and 1600MT/s dual channel DDR3 memory interface. Processor TDP 17W.
conga-TS77/827E	046508	COM Express Type 6 Basic module with Intel® Celeron™ 827E single core processor with 1.4GHz, 1.5MB L3 cache and 1333MT/s dual channel DDR3 memory interface.
conga-TS77/847E	046509	COM Express Type 6 Basic module with Intel® Celeron™ 847E dual core processor with1.1GHz, 2MB L2 cache and 1333MT/s dual channel DDR3 memory interface.
conga-TS77/1020E	046511	COM Express Type 6 Basic module with Intel® Celeron™ 1020E dual core processor with 2.2GHz, 2MB L2 cache and 1333MT/s dual channel DDR3 memory interface.
conga-TS77/1047UE	046510	COM Express Type 6 Basic module with Intel® Celeron™ 1047UE dual core processor with 1.4GHz, 2MB cache and 1333MT/s dual channel DDR3 memory interface.
conga-TS77/927UE	046512	COM Express Type 6 Basic module with Intel® Celeron™ 927UE single core processor with 1.5GHz, 1MB cache, 1333MT/s dual channel DDR3 memory interface and without PEG port.
conga-TS67/HSP-HP-B	046450	Standard heatspreader for conga-TS77 with integrated heat pipes. 2.7mm bore hole standoffs.
conga- TS67/HSP-HP-T	046451	Standard heatspreader for conga-TS77 with integrated heat pipes. M2.5mm thread standoffs.
conga- TS67/CSP-HP-B	046452	Standard passive cooling solution for conga-TS77 with integrated heat pipes, 15mm silver fins and 20mm overall heat sink height. All standoffs are with 2.7mm bore hole.
conga- TS67/CSP-HP-T	046453	Standard passive cooling solution for conga-TS67 and TS77 with integrated heat pipes, 15mm silver fins and 20mm overall heat sink height. All standoffs are M2.5mm thread.
conga- TS67/CSA-HP-B	046454	Standard active cooling solution for conga-TS77 with integrated heat pipes, 15mm silver fins, 20mm overall heat sink height and integrated 12V fan. All standoffs are with 2.7mm bore hole.
conga-TS67/CSA-HP-T	046455	Standard active cooling solution for conga-TS77 with integrated heat pipes, 15mm silver fins, 20mm overall heat sink height and integrated 12V fan. All standoffs are M2.5mm thread.

Engineering Tools / Accessories for COM Express*		
conga-TEVAL	065800	Evaluation carrier board for Type 6 COM-Express-modules
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
COM-Express-carrierboard-Socket-5	400007	Connector for COM-Express carrier boards, height 5mm, packing unit 4 pieces
COM-Express-carrierboard-Socket-8	400004	Connector for COM-Express carrier boards, height 8mm, packing unit 4 pieces
MGCA	xxxxxxx	xxxxxx

© 2013 congatec AG. All rights reserved. All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. The products may include software. Use of the software is subject to the terms and conditions set out in the respective owner's license agreements, which are available at [www.congatec.com](http://www.congatec.com) and/or upon request. Product names, logos, brands, and other trademarks featured or referred to within this datasheet, or the congatec website, are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG, our products, or our website.  
Rev. September 6, 2013 KS