



# Specification for 12211086-1 CM Choke 3 pH L>10μH Ø1,12


Schematic :

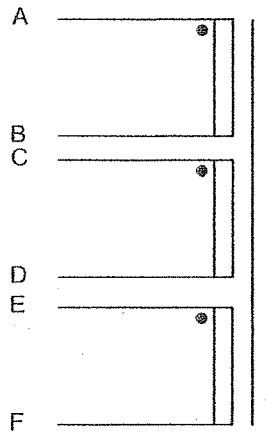

Mechanical drawing :



Bottom view

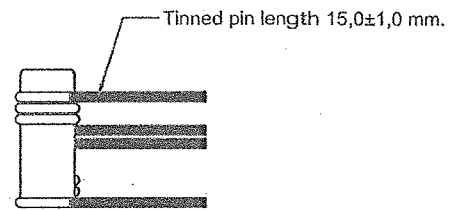

Side view

Winding specification :  
 A - B : 3 turns      Ø1,10 mm.  
 C - D : 3 turns      Ø1,10 mm.  
 E - F : 3 turns      Ø1,10 mm.

Routine test :                      L (A-B) : L > 10 μH at 100KHz / 100 mV.

Material specification :              Core : RINGKERNE R16/6,3 N30 (B64290-K45-X830), Epcos  
 Cu-wire : Polyesterimide with Polyamideimide overcoat 200°C , grade 2 acc. to IEC 60317.

Marking :                                  None

No.:	Revision:	Date/Init.:	 FLUX INTERNATIONAL LTD., BLK C5 41/27 Bangna-Trad KM.16.5 Bangchalong, Bangplee, Samutprakarn 10540, Thailand. Tel: +662-337-0201 Fax: +662-337-0187 www.flux-int.com	Scale:	Size:	Projection:
1	00/Initial	22-Mar-11/DS		Tolerances : -		
2	01/Update	28-Mar-11/DS		Unless otherwise specified		
3	02/Update	26-Sep-11/DS		Material : -		
Constructor : Dumrongrit S. Approved : Suphachai S.			Title: Specification for 12211086-1 CM Choke 3 pH L>10μH Ø1,12	File name : 04910737-1.dwg Documentno.: 04910737-1		