



Specification for 12401020-* CM Choke 1ph 1,62mH DK-13418-B

Schematic :

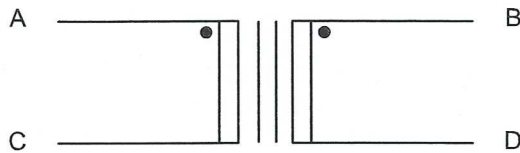

Mechanical drawing :

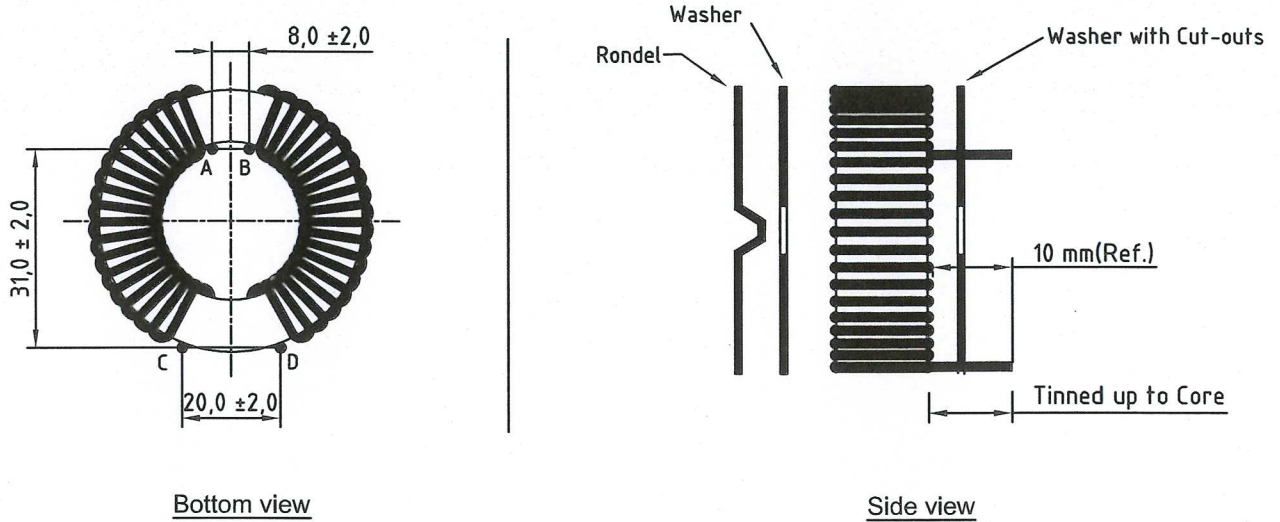

Winding specification :
 A - C : 18 turns Ø1,60 mm.
 B - D : 18 turns Ø1,60 mm.

Routine test : L (A-B) : 1,2 < L < 2,0 mH at 10KHz / 1V.

Material specification :
 Core : Toroid Core B64290-L0022-X830, Epcos
 Cu-wire : Polyesterimide with Polyamideimide overcoat 200°C, grade 2 acc. to IEC 60317
 Rondel : Metal, Ø35mm, Surface treated
 Washer : Rubber Ø50mm, White (2 pcs)

Marking : None

No.:	Revision:	Date/Init.:	 FLUX INTERNATIONAL LTD., BLK C5 41/27 Bangna-Trad KM.16.5 Bangchalong, Bangplee, Samutprakam 10540, Thailand. Tel: +662-337-0201 Fax: +662-337-0187 www.flux-int.com	Scale:	Size:	Projection:
1	00/Intial	28-Mar-11/DS		Tolerances : -		
2	01/Update	29-Mar-11/DS		Unless otherwise specified		
3	02/Update	28-Apr-11/DS		Material : -		
Constructor: Dumrongrit S. Approved: Suphachai S.			Title: Specification for 12401020-* CM Choke 1ph 1,62mH DK-13418-B	File name : 04910734-1.dwg Documentno.: 04910734-1		