

AUTOMOTIVE BLADE FUSE CLIP & HOLDERS

- Available for standard, mini and maxi fuse sizes
- Horizontal and vertical mini blade clips and holders for Littelfuse Low Profile Mini 897 series, Mini 297 or 997 series, Bussmann ATM series fuses or equivalents

- Horizontal and vertical standard blade clips and holders for Littelfuse ATO 257 series and Bussmann ATC series fuses or equivalents
- Vertical maxi blade clips and holders for Littelfuse Maxi 297 series and Bussmann MAX series fuses or equivalent.


- Thru hole PC mountable, maintains position during wave soldering
- Holds fuse securely, even after multiple insertions
- Available with orientation legs to assure proper orientation

"MAXI" AUTOMOTIVE FUSE CLIP & HOLDER

FOR .312 (7.9) × .032 (.80) MAXI BLADE FUSES

For Littelfuse Maxi 297 series/Bussmann Max series or equivalent

- Thru hole PC mountable, maintains position during wave soldering
- Holder design prevents solder wicking
- Withstands the rigors of shock and vibration
- Holds fuse securely, even after multiple insertions



SPECIFICATIONS


Contacts: .020 (.51) thick Copper, Tin Nickel Plate

Insulator: Glass filled Nylon, UL Rated 94V-0

Current Rating: 60 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)

Mounting Detail For Two Clips



CAT. NO. 3555

CAT. NO. 3555-2

MODULAR AUTOMOTIVE BLADE FUSE HOLDERS

FOR .205 (5.2) × .025 (.64) STANDARD BLADE FUSES

For Littelfuse ATO 257 series/Bussmann ATC series or equivalent


SPECIFICATIONS

Contacts: Brass, Tin Plate

Body: Nylon, UL Rated 94V-0

Current Rating: 20 Amps @ 500V AC

Temperature Rating: -58°F to +292°F (-50°C to +145°C)

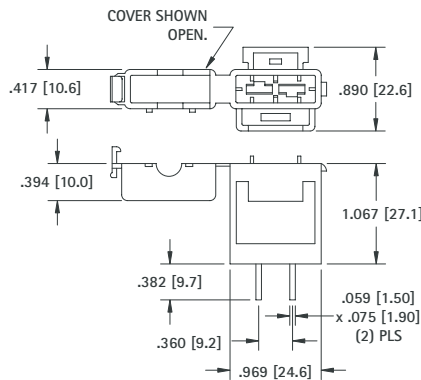

SPECIFICATIONS

Contacts: Brass, Tin Plate


Body: Nylon, UL Rated 94V-0

Current Rating: 20 Amps @ 500V AC


Temperature Rating: -58°F to +292°F (-50°C to +145°C)

- Designed for standard auto blade fuses
- Fully insulated compact design
- Mounts easily in pre-drilled or punched hole
- Holder has pocket to hold spare fuse
- Safety lever release clip will not open under shock or vibration
- Fuses are installed and removed easily
- May be used individually or easily interlocked for multiple mounting

Mounting Detail For Two Holders



Mounting Detail



3560 (Shown with two 3560 holders, interlocked)


3559 (14 gauge wire lead must be cut and spliced for in-line use)

CAT. NO. 3560 (PC Mount)


CAT. NO. 3559 (In Line)



CAT. NO. 3558

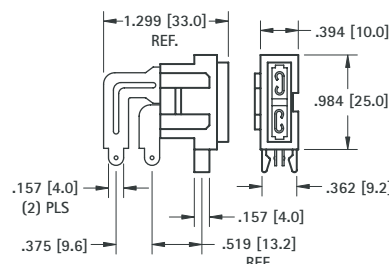

Mounting Detail



Mounting Detail For Two Holders

