


ALUMINUM ELECTROLYTIC CAPACITORS


UWD

Chip Type, Low Impedance
High Temperature (260°C) Reflow



- Corresponding with 260°C peak reflow soldering
Recommended reflow condition : 260°C peak 5 sec. 230°C over 60 sec. 2 times ($\phi 10 \times 10$: 1 time)
- Chip type, low impedance temperature range up to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.

UWD



UUD




Specifications


| Item | Performance Characteristics | | | | | | | | | | | | | | | | | | | | | |
|---------------------------------------|--|--------------------|--|--------------|---|-----------------|---|----|---------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|---------------------------------|---|---|---|---|---|---|
| Category Temperature Range | -55 to +105°C | | | | | | | | | | | | | | | | | | | | | |
| Rated Voltage Range | 6.3 to 50V | | | | | | | | | | | | | | | | | | | | | |
| Rated Capacitance Range | 1 to 1500 μ F | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Tolerance | $\pm 20\%$ at 120Hz, 20°C | | | | | | | | | | | | | | | | | | | | | |
| Leakage Current | After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01 CV or 3 (μ A), whichever is greater. | | | | | | | | | | | | | | | | | | | | | |
| Tangent of loss angle (tan δ) | <p>Measurement frequency : 120Hz at 20°C</p> <table border="1"> <tr> <td>Rated voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>tan δ (MAX.)</td> <td>0.26 (0.28)</td> <td>0.20 (0.24)</td> <td>0.16 (0.20)</td> <td>0.14 (0.16)</td> <td>0.12 (0.14)</td> <td>0.12 (0.14)</td> </tr> </table> <p>() is $\phi 8$ over</p> | Rated voltage (V) | 6.3 | 10 | 16 | 25 | 35 | 50 | tan δ (MAX.) | 0.26 (0.28) | 0.20 (0.24) | 0.16 (0.20) | 0.14 (0.16) | 0.12 (0.14) | 0.12 (0.14) | | | | | | | |
| Rated voltage (V) | 6.3 | 10 | 16 | 25 | 35 | 50 | | | | | | | | | | | | | | | | |
| tan δ (MAX.) | 0.26 (0.28) | 0.20 (0.24) | 0.16 (0.20) | 0.14 (0.16) | 0.12 (0.14) | 0.12 (0.14) | | | | | | | | | | | | | | | | |
| Stability at Low Temperature | <p>Measurement frequency : 120Hz</p> <table border="1"> <tr> <td>Rated voltage (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Impedance ratio Z-25°C / Z+20°C</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>ZT / Z20 (MAX.) Z-55°C / Z+20°C</td> <td>5</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table> | Rated voltage (V) | 6.3 | 10 | 16 | 25 | 35 | 50 | Impedance ratio Z-25°C / Z+20°C | 3 | 2 | 2 | 2 | 2 | 2 | ZT / Z20 (MAX.) Z-55°C / Z+20°C | 5 | 4 | 4 | 3 | 3 | 3 |
| Rated voltage (V) | 6.3 | 10 | 16 | 25 | 35 | 50 | | | | | | | | | | | | | | | | |
| Impedance ratio Z-25°C / Z+20°C | 3 | 2 | 2 | 2 | 2 | 2 | | | | | | | | | | | | | | | | |
| ZT / Z20 (MAX.) Z-55°C / Z+20°C | 5 | 4 | 4 | 3 | 3 | 3 | | | | | | | | | | | | | | | | |
| Endurance | <p>The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours (2000 hours for $\phi D = 4, 5$ and 6.3) at 105°C.</p> <table border="1"> <tr> <td>Capacitance change</td> <td>Within $\pm 30\%$ of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table> | Capacitance change | Within $\pm 30\%$ of the initial capacitance value | tan δ | 200% or less than the initial specified value | Leakage current | Less than or equal to the initial specified value | | | | | | | | | | | | | | | |
| Capacitance change | Within $\pm 30\%$ of the initial capacitance value | | | | | | | | | | | | | | | | | | | | | |
| tan δ | 200% or less than the initial specified value | | | | | | | | | | | | | | | | | | | | | |
| Leakage current | Less than or equal to the initial specified value | | | | | | | | | | | | | | | | | | | | | |
| Shelf Life | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. | | | | | | | | | | | | | | | | | | | | | |
| Resistance to soldering heat | <p>The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.</p> <table border="1"> <tr> <td>Capacitance change</td> <td>Within $\pm 10\%$ of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>Less than or equal to the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table> | Capacitance change | Within $\pm 10\%$ of the initial capacitance value | tan δ | Less than or equal to the initial specified value | Leakage current | Less than or equal to the initial specified value | | | | | | | | | | | | | | | |
| Capacitance change | Within $\pm 10\%$ of the initial capacitance value | | | | | | | | | | | | | | | | | | | | | |
| tan δ | Less than or equal to the initial specified value | | | | | | | | | | | | | | | | | | | | | |
| Leakage current | Less than or equal to the initial specified value | | | | | | | | | | | | | | | | | | | | | |
| Marking | Black print on the case top. | | | | | | | | | | | | | | | | | | | | | |

Chip Type


($\phi 4$ to $\phi 6.3$)

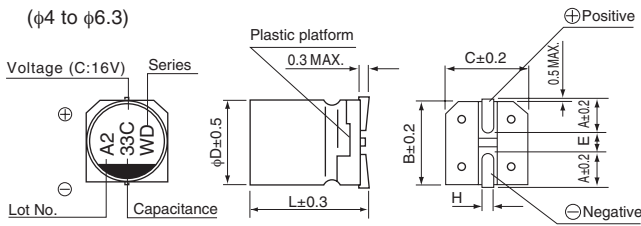

($\phi 8, \phi 10$)

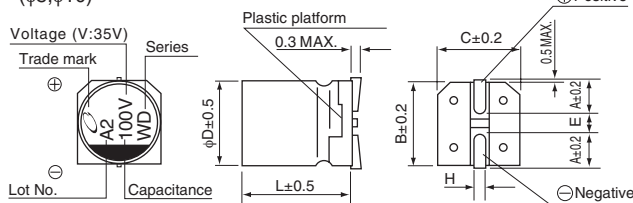

Type numbering system (Example : 16V 22 μ F)

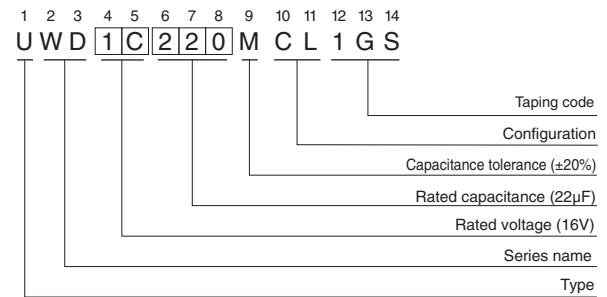

| $\phi D \times L$ | 4 x 5.8 | 5 x 5.8 | 6.3 x 5.8 | 6.3 x 7.7 | 8 x 10 | 10 x 10 |
|-------------------|------------|------------|------------|------------|------------|------------|
| A | 1.8 | 2.1 | 2.4 | 2.4 | 2.9 | 3.2 |
| B | 4.3 | 5.3 | 6.6 | 6.6 | 8.3 | 10.3 |
| C | 4.3 | 5.3 | 6.6 | 6.6 | 8.3 | 10.3 |
| E | 1.0 | 1.3 | 2.2 | 2.2 | 3.1 | 4.5 |
| L | 5.8 | 5.8 | 5.8 | 7.7 | 10 | 10 |
| H | 0.5 to 0.8 | 0.5 to 0.8 | 0.5 to 0.8 | 0.5 to 0.8 | 0.8 to 1.1 | 0.8 to 1.1 |

Voltage

| | | | | | | |
|------|-----|----|----|----|----|----|
| V | 6.3 | 10 | 16 | 25 | 35 | 50 |
| Code | j | A | C | E | V | H |

Frequency coefficient of rated ripple current

| | | | | | |
|-------------|-------|--------|--------|-------|----------------|
| Frequency | 50 Hz | 120 Hz | 300 Hz | 1 kHz | 10 kHz or more |
| Coefficient | 0.35 | 0.50 | 0.64 | 0.83 | 1.00 |

● Dimension table in next page.

UWD

■ Dimensions

| Rated Voltage (V) (code) | Rated Capacitance (μF) | Case Size φD×L (mm) | tan δ | Leakage Current (μA) (at 20°C after 2 minutes) | Impedance (Ω) MAX. (20°C/100kHz) | Rated Ripple (mArms) (105°C/100kHz) | Part Number |
|--------------------------|------------------------|---------------------|-------|--|----------------------------------|-------------------------------------|----------------|
| 6.3 (0J) | 27 | 4×5.8 | 0.26 | 3 | 1.80 | 80 | UWD0J270MCL1GS |
| | 33 | 5×5.8 | 0.26 | 3 | 0.76 | 150 | UWD0J330MCL1GS |
| | 47 | 5×5.8 | 0.26 | 3 | 0.76 | 150 | UWD0J470MCL1GS |
| | 56 | 5×5.8 | 0.26 | 3.528 | 0.76 | 150 | UWD0J560MCL1GS |
| | 68 | 6.3×5.8 | 0.26 | 4.284 | 0.44 | 230 | UWD0J680MCL1GS |
| | 100 | 6.3×5.8 | 0.26 | 6.3 | 0.44 | 230 | UWD0J101MCL1GS |
| | 150 | 6.3×5.8 | 0.26 | 9.45 | 0.44 | 230 | UWD0J151MCL1GS |
| | 220 | 6.3×5.8 | 0.26 | 13.86 | 0.44 | 230 | UWD0J221MCL1GS |
| | 330 | 6.3×7.7 | 0.26 | 20.79 | 0.34 | 280 | UWD0J331MCL1GS |
| | 470 | 8×10 | 0.28 | 29.61 | 0.17 | 450 | UWD0J471MCL1GS |
| | 680 | 8×10 | 0.28 | 42.84 | 0.17 | 450 | UWD0J681MCL1GS |
| | 1000 | 10×10 | 0.28 | 63 | 0.09 | 670 | UWD0J102MCL1GS |
| | 1500 | 10×10 | 0.28 | 94.5 | 0.09 | 670 | UWD0J152MCL1GS |
| 10 (1A) | 22 | 4×5.8 | 0.20 | 3 | 1.80 | 80 | UWD1A220MCL1GS |
| | 27 | 5×5.8 | 0.20 | 3 | 0.76 | 150 | UWD1A270MCL1GS |
| | 33 | 5×5.8 | 0.20 | 3.3 | 0.76 | 150 | UWD1A330MCL1GS |
| | 47 | 6.3×5.8 | 0.20 | 4.7 | 0.44 | 230 | UWD1A470MCL1GS |
| | 56 | 6.3×5.8 | 0.20 | 5.6 | 0.44 | 230 | UWD1A560MCL1GS |
| | 68 | 6.3×5.8 | 0.20 | 6.8 | 0.44 | 230 | UWD1A680MCL1GS |
| | 100 | 6.3×5.8 | 0.20 | 10 | 0.44 | 230 | UWD1A101MCL1GS |
| | 150 | 6.3×5.8 | 0.20 | 15 | 0.44 | 230 | UWD1A151MCL1GS |
| | 220 | 6.3×7.7 | 0.20 | 22 | 0.34 | 280 | UWD1A221MCL1GS |
| | 330 | 8×10 | 0.24 | 33 | 0.17 | 450 | UWD1A331MCL1GS |
| | 470 | 8×10 | 0.24 | 47 | 0.17 | 450 | UWD1A471MCL1GS |
| | 680 | 10×10 | 0.24 | 68 | 0.09 | 670 | UWD1A681MCL1GS |
| | 1000 | 10×10 | 0.24 | 100 | 0.09 | 670 | UWD1A102MCL1GS |
| 16 (1C) | 15 | 4×5.8 | 0.16 | 3 | 1.80 | 80 | UWD1C150MCL1GS |
| | 22 | 5×5.8 | 0.16 | 3.52 | 0.76 | 150 | UWD1C220MCL1GS |
| | 27 | 5×5.8 | 0.16 | 4.32 | 0.76 | 150 | UWD1C270MCL1GS |
| | 33 | 6.3×5.8 | 0.16 | 5.28 | 0.44 | 230 | UWD1C330MCL1GS |
| | 47 | 6.3×5.8 | 0.16 | 7.52 | 0.44 | 230 | UWD1C470MCL1GS |
| | 56 | 6.3×5.8 | 0.16 | 8.96 | 0.44 | 230 | UWD1C560MCL1GS |
| | 68 | 6.3×5.8 | 0.16 | 10.88 | 0.44 | 230 | UWD1C680MCL1GS |
| | 100 | 6.3×5.8 | 0.16 | 16 | 0.44 | 230 | UWD1C101MCL1GS |
| | 150 | 6.3×7.7 | 0.16 | 24 | 0.34 | 280 | UWD1C151MCL1GS |
| | 220 | 6.3×7.7 | 0.16 | 35.2 | 0.34 | 280 | UWD1C221MCL1GS |
| | 330 | 8×10 | 0.20 | 52.8 | 0.17 | 450 | UWD1C331MCL1GS |
| | 470 | 8×10 | 0.20 | 75.2 | 0.17 | 450 | UWD1C471MCL1GS |
| | 680 | 10×10 | 0.20 | 108.8 | 0.09 | 670 | UWD1C681MCL1GS |

UWD

■ Dimensions

| Rated Voltage (V) (code) | Rated Capacitance (μF) | Case Size φD×L (mm) | tan δ | Leakage Current (μA) (at 20°C after 2 minutes) | Impedance (Ω) MAX. (20°C/100kHz) | Rated Ripple (mA rms) (105°C/100kHz) | Part Number |
|--------------------------|------------------------|---------------------|-------|--|----------------------------------|--------------------------------------|----------------|
| 25 (1E) | 10 | 4×5.8 | 0.14 | 3 | 1.80 | 80 | UWD1E100MCL1GS |
| | 15 | 5×5.8 | 0.14 | 3.75 | 0.76 | 150 | UWD1E150MCL1GS |
| | 22 | 5×5.8 | 0.14 | 5.5 | 0.76 | 150 | UWD1E220MCL1GS |
| | 27 | 6.3×5.8 | 0.14 | 6.75 | 0.44 | 230 | UWD1E270MCL1GS |
| | 33 | 6.3×5.8 | 0.14 | 8.25 | 0.44 | 230 | UWD1E330MCL1GS |
| | 47 | 6.3×5.8 | 0.14 | 11.75 | 0.44 | 230 | UWD1E470MCL1GS |
| | 56 | 6.3×5.8 | 0.14 | 14 | 0.44 | 230 | UWD1E560MCL1GS |
| | 68 | 6.3×5.8 | 0.14 | 17 | 0.44 | 230 | UWD1E680MCL1GS |
| | 100 | 6.3×7.7 | 0.14 | 25 | 0.34 | 280 | UWD1E101MCL1GS |
| | 150 | 8×10 | 0.16 | 37.5 | 0.17 | 450 | UWD1E151MCL1GS |
| | 220 | 8×10 | 0.16 | 55 | 0.17 | 450 | UWD1E221MCL1GS |
| | 330 | 10×10 | 0.16 | 82.5 | 0.09 | 670 | UWD1E331MCL1GS |
| | 470 | 10×10 | 0.16 | 117.5 | 0.09 | 670 | UWD1E471MCL1GS |
| 35 (1V) | 4.7 | 4×5.8 | 0.12 | 3 | 1.80 | 80 | UWD1V47MCL1GS |
| | 10 | 5×5.8 | 0.12 | 3.5 | 0.76 | 150 | UWD1V100MCL1GS |
| | 15 | 5×5.8 | 0.12 | 5.25 | 0.76 | 150 | UWD1V150MCL1GS |
| | 22 | 5×5.8 | 0.12 | 7.7 | 0.76 | 150 | UWD1V220MCL1GS |
| | 27 | 6.3×5.8 | 0.12 | 9.45 | 0.44 | 230 | UWD1V270MCL1GS |
| | 33 | 6.3×5.8 | 0.12 | 11.55 | 0.44 | 230 | UWD1V330MCL1GS |
| | 47 | 6.3×5.8 | 0.12 | 16.45 | 0.44 | 230 | UWD1V470MCL1GS |
| | 56 | 6.3×7.7 | 0.12 | 19.6 | 0.34 | 280 | UWD1V560MCL1GS |
| | 68 | 6.3×7.7 | 0.12 | 23.8 | 0.34 | 280 | UWD1V680MCL1GS |
| | 100 | 8×10 | 0.14 | 35 | 0.17 | 450 | UWD1V101MCL1GS |
| | 150 | 8×10 | 0.14 | 52.5 | 0.17 | 450 | UWD1V151MCL1GS |
| | 220 | 10×10 | 0.14 | 77 | 0.09 | 670 | UWD1V221MCL1GS |
| | 330 | 10×10 | 0.14 | 115.5 | 0.09 | 670 | UWD1V331MCL1GS |
| 50 (1H) | 1 | 4×5.8 | 0.12 | 3 | 5.00 | 30 | UWD1H010MCL1GS |
| | 2.2 | 4×5.8 | 0.12 | 3 | 5.00 | 30 | UWD1H2R2MCL1GS |
| | 3.3 | 4×5.8 | 0.12 | 3 | 5.00 | 30 | UWD1H3R3MCL1GS |
| | 4.7 | 5×5.8 | 0.12 | 3 | 1.52 | 85 | UWD1H4R7MCL1GS |
| | 10 | 6.3×5.8 | 0.12 | 5 | 0.88 | 165 | UWD1H100MCL1GS |
| | 15 | 6.3×5.8 | 0.12 | 7.5 | 0.88 | 165 | UWD1H150MCL1GS |
| | 22 | 6.3×5.8 | 0.12 | 11 | 0.88 | 165 | UWD1H220MCL1GS |
| | 27 | 6.3×7.7 | 0.12 | 13.5 | 0.68 | 185 | UWD1H270MCL1GS |
| | 33 | 6.3×7.7 | 0.12 | 16.5 | 0.68 | 185 | UWD1H330MCL1GS |
| | 47 | 6.3×7.7 | 0.12 | 23.5 | 0.68 | 185 | UWD1H470MCL1GS |
| | 56 | 8×10 | 0.14 | 28 | 0.34 | 300 | UWD1H560MCL1GS |
| | 68 | 8×10 | 0.14 | 34 | 0.34 | 300 | UWD1H680MCL1GS |
| | 100 | 8×10 | 0.14 | 50 | 0.34 | 300 | UWD1H101MCL1GS |
| | 150 | 10×10 | 0.14 | 75 | 0.18 | 670 | UWD1H151MCL1GS |
| 220 | 10×10 | 0.14 | 110 | 0.18 | 670 | UWD1H221MCL1GS | |

- Taping specifications are given in page 20.
- Recommended land size, soldering by reflow are given in page 16, 17.
- Please refer to page 3 for the minimum order quantity.