


## FMC 1,5/ 4-STF-3,5

Order No.: 1966114

The figure shows a 10-position version of the product

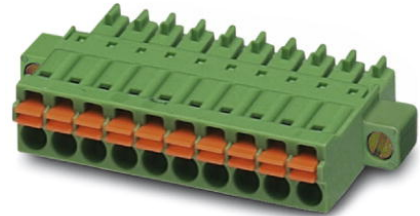

<http://eshop.phoenixcontact.dk/phoenix/treeViewClick.do?UID=1966114>

Plug component, Nominal current: 8 A, Rated voltage (III/2): 160 V,  
Number of positions: 4, Pitch: 3.5 mm, Connection method: Spring-  
cage conn., Color: green, Contact surface: Tin

### Commercial data

EAN	4017918943301
Pack	50 pcs.
Customs tariff	85366990
Gross weight in pieces	2.99 g
country of origin	DE
Catalog page information	Page 189 (CC-2011)

### Product notes

WEEE/RoHS-compliant since:  
01-01-2003



Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions / positions

Length	22.9 mm
Height	7.8 mm
Pitch	3.5 mm
Dimension a	10.5 mm
Number of positions	4

**Technical data**

Range of articles	FMC 1,5/...-STF
Insulating material group	I
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	160 V
Rated voltage (II/2)	320 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	8 A
Nominal voltage $U_N$	160 V
Nominal cross section	1.5 mm <sup>2</sup>
Maximum load current	8 A
Insulating material	PA
Inflammability class according to UL 94	V0
Internal cylindrical gage	A1
Stripping length	10 mm
Nominal voltage, UL/CUL Use Group B	150 V
Nominal current, UL/CUL Use Group B	8 A
Nominal voltage, UL/CUL Use Group D	150 V
Nominal current, UL/CUL Use Group D	8 A

**Connection data**

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	1.5 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	1.5 mm <sup>2</sup>
Conductor cross section stranded, with ferrule without plastic sleeve min.	0.25 mm <sup>2</sup>
Conductor cross section stranded, with ferrule without plastic sleeve max.	1.5 mm <sup>2</sup>
Conductor cross section stranded, with ferrule with plastic sleeve min.	0.25 mm <sup>2</sup>
Conductor cross section stranded, with ferrule with plastic sleeve max.	0.75 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	16

Minimum AWG according to UL/CUL	24
Maximum AWG according to UL/CUL	16

**Certificates**



Certification cULus Recognized, GOST

Certifications applied for:


Certification Ex:

**Accessories**

Item	Designation	Description
<b>Marking</b>		
1051993	B-STIFT	Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm
0804073	SK 3,5/2,8:FORTL.ZAHLEN	Marker cards, Card, white, labeled, Horizontal: Consecutive numbers 1 - 10, 11 - 20, etc. up to 91 - 99, Mounting type: Adhesive, For terminal block width: 3.5 mm
0805030	SK 3,5/2,8:SO	Marker cards, white, Mounting type: Adhesive, For terminal block width: 3.5 mm
0803883	SK U/2,8 WH:UNBEDRUCKT	Marker cards, Sheet, white, Unlabeled, Can be labeled with: Plotter, Office-Drucksysteme, Mounting type: Adhesive


**Drawings**

Diagram

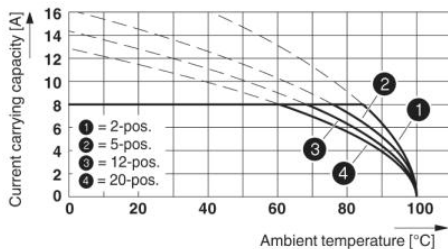

Dimensioned drawing

---

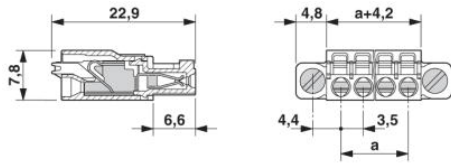

**Address**

Phoenix Contact A/S  
Hammerholmen 48  
2650 Hvidovre, Denmark  
Phone +45 36 77 44 11  
Fax +45 36 77 40 22  
<http://www.phoenixcontact.dk>

Phoenix Contact A/S  
Technical modifications reserved;