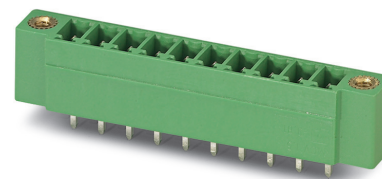


# Data sheet

Order No.: 1843282

Type: MCV 1,5/ 8-GF-3,5

PCB header



The figure shows a 10-position version of the product

## 1 Main features



- |                         |                     |                        |                     |
|-------------------------|---------------------|------------------------|---------------------|
| • No. of pos.           | 8                   | • Nominal current      | 8 A                 |
| • Nominal cross section | 1.5 mm <sup>2</sup> | • Nominal voltage      | 160 V               |
| • Color                 | green (6021)        | • Connection direction | 90 °                |
| • Pitch                 | 3.5 mm              | • Type of packaging    | packed in cardboard |
| • Mounting type         | Wave soldering      |                        |                     |

## 2 Your advantages

- ✓ Well-known mounting principle allows worldwide use
- ✓ Screwable flange for superior mechanical stability
- ✓ Vertical connection enables multi-row arrangement on the PCB
- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies



Make sure you always use the latest documentation.

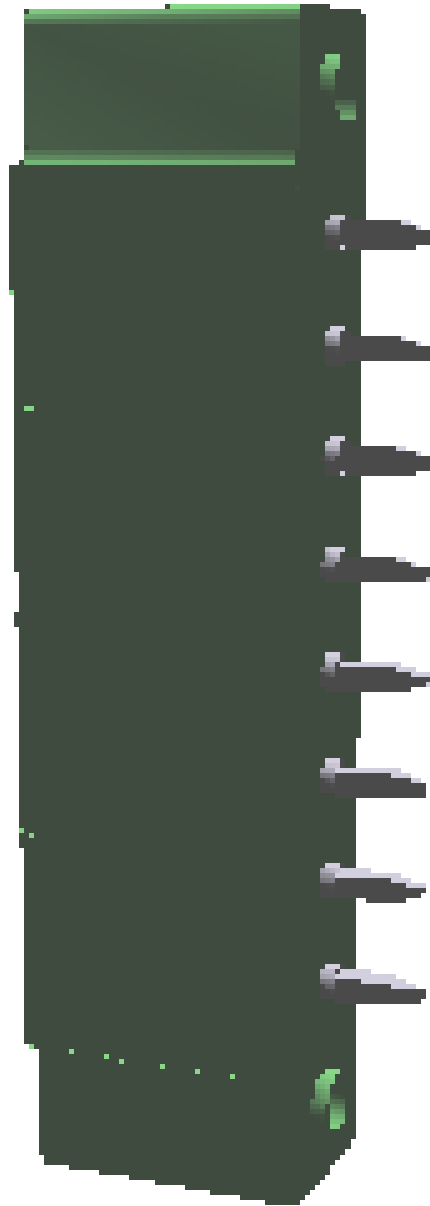
It can be downloaded at: [phoenixcontact.net/product/1843282](https://phoenixcontact.net/product/1843282)

**3 Table of contents**

|    |   |    |
|----|---|----|
| 1  | Main features.....  | 1  |
| 2  | Your advantages .....                                       | 1  |
| 3  | Table of contents .....                                     | 2  |
| 4  | 3D model in PDF can be activated (Acrobat Reader only)..... | 3  |
| 5  | General Technical Data .....                                | 4  |
| 6  | Mounting.....   | 5  |
| 7  | Material properties.....                                    | 5  |
| 8  | Dimensions.....   | 6  |
| 9  | Series drawing.....   | 7  |
| 10 | Application.....  | 8  |
| 11 | Packaging information .....                                 | 8  |
| 12 | Mechanical tests.....                                       | 9  |
| 13 | Insertion and withdrawal forces .....                       | 10 |
| 14 | Electrical tests .....                                      | 11 |
| 15 | Current carrying capacity/derating curves .....             | 12 |
| 16 | Approvals / Certificates.....                               | 14 |
| 17 | Commercial Data.....  | 15 |
| 18 | corresponding plugs .....                                   | 15 |
| 19 | Accessories.....  | 15 |
| 20 | Combination tests.....                                      | 16 |

1843282 MCV 1,5/ 8-GF-3,5

4 3D model in PDF can be activated (Acrobat Reader only)



**1843282 MCV 1,5/ 8-GF-3,5****5 General Technical Data****5.1 item properties**

|  |                   |
|--|-------------------|
| Order No.  | 1843282           |
| Type   | MCV 1,5/ 8-GF-3,5 |
| Plug-in system                                   | MINI COMBICON     |
| Product type                                     | PCB header        |
| Type of contact                                  | Male connector    |
| Range of articles                                | MCV 1,5/..-GF     |
| Pitch  | 3.5 mm            |
| Number of positions                              | 8                 |
| Number of levels                                 | 1                 |
| Number of connections                            | 8                 |
| Number of potentials                             | 8                 |
| Mounting type                                    | Wave soldering    |
| Connection direction of the connector to the PCB | 90 °              |
| Pin layout                                       | Linear pinning    |
| Solder pins per potential                        | 1                 |
| Type   | Standard          |

**1843282 MCV 1,5/ 8-GF-3,5****6 Mounting****6.1 Flange mounting**

|                 |                 |
|-----------------|-----------------|
| Type of locking | Screw locking   |
| Mounting flange | Threaded flange |
| Torque          | 0.3 Nm          |

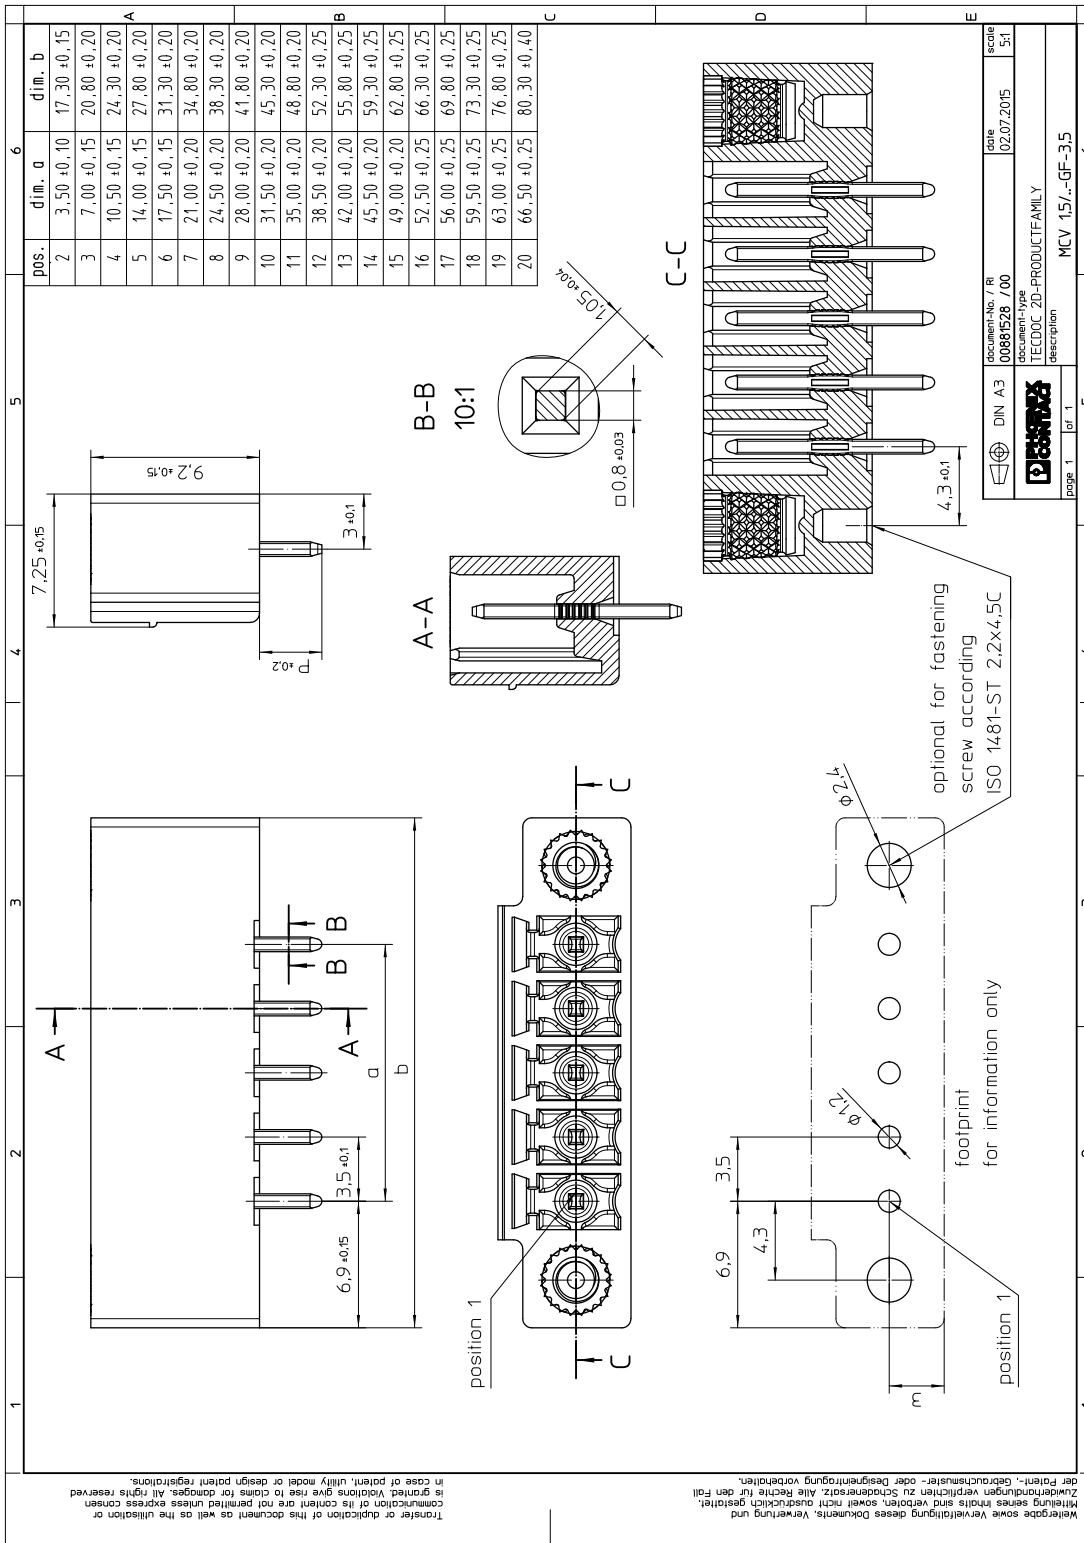
**7 Material properties****7.1 Material of metal parts**

|  |   |
|--|---|
| Note                                   | WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material                       | Cu alloy  |
| Surface contact area                   | Nickel (1 - 3 µm Ni) , Tin (3 - 5 µm Sn)                                |
| Soldering area surface                 | Nickel (1 - 3 µm Ni) , Tin (3 - 5 µm Sn)                                |
| Surface characteristics                | Tin-plated  |
| Insulating material data               | Housing   |
| Color                                  | green (6021)  |
| Insulating material                    | PBT   |
| Insulating material group              | IIIa  |
| CTI according to IEC 60112             | 225   |
| Flammability rating according to UL 94 | V0  |

**1843282 MCV 1,5/ 8-GF-3,5****8 Dimensions****8.1 Dimensions for the product**

|                             |         |
|-----------------------------|---------|
| Length                      | 7.25 mm |
| Width                       | 38.3 mm |
| Height (without solder pin) | 9.2 mm  |
| Total height                | 12.6 mm |
| Solder pin [P]              | 3.4 mm  |

9 Series drawing



**1843282 MCV 1,5/ 8-GF-3,5**

---

**10 Application****11 Packaging information**

|                    |                     |
|--------------------|---------------------|
| Type of packaging  | packed in cardboard |
| Pieces per package | 100                 |

**11.1 Temperature limit values**

|   |   |
|---|---|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                    |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                    |
| Ambient temperature (operation)         | -40 °C ... 100 °C (dependent on the derating curve) |

**1843282 MCV 1,5/ 8-GF-3,5****12 Mechanical tests****12.1 Visual examination**

|                    |                       |
|--------------------|-----------------------|
| Specification      | IEC 61984:2008-10     |
| Visual examination | Test passed           |
| Specification      | IEC 60512-1-1:2002-02 |

**12.2 Dimensional test**

|                  |                       |
|------------------|-----------------------|
| Dimensional test | Test passed           |
| Specification    | IEC 60512-1-2:2002-02 |

**12.3 Resistance of marking**

|                       |                        |
|-----------------------|------------------------|
| Resistance of marking | Test passed            |
| Specification         | IEC 60068-2-70:1995-12 |

**12.4 Polarization and coding**

|                         |                        |
|-------------------------|------------------------|
| Polarization and coding | Test passed            |
| Specification           | IEC 60512-13-5:2006-02 |
| Test force              | 20 N                   |

**12.5 Contact retention in insert**

|  |                        |
|--|------------------------|
| Contact holder in insert<br>Requirements >20 N | Test passed            |
| Specification                                  | IEC 60512-15-1:2008-05 |

**1843282 MCV 1,5/ 8-GF-3,5****13 Insertion and withdrawal forces**

| Insertion and withdrawal force      |             |
|-------------------------------------|-------------|
| Specification                       | Test passed |
| No. of cycles                       | 25          |
| Insertion strength per pos. approx. | 8 N         |
| Withdraw strength per pos. approx.  | 6 N         |

**1843282 MCV 1,5/ 8-GF-3,5****14 Electrical tests**

|   |                           |
|---|---------------------------|
| Rated current / conductor cross section | 8 A / 1.5 mm <sup>2</sup> |
| Rated insulation voltage (III/2)        | 160 V                     |
| Rated surge voltage (III/2)             | 2.5 kV                    |
| Contact resistance                      | 1.7 mΩ                    |
| Degree of pollution                     | 2                         |

**14.1 Air and creepage distances**

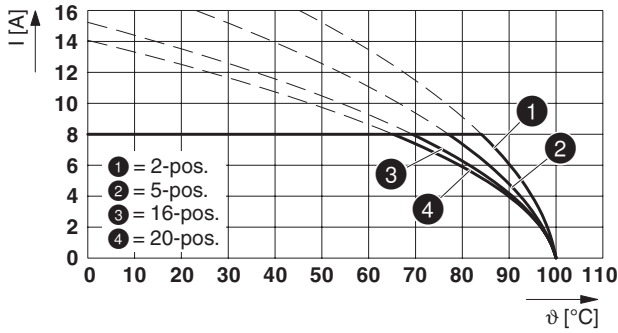
|   |                     |        |        |
|---|---------------------|--------|--------|
| Component   | PCB header          |        |        |
| Specification   | IEC 60664-1:2007-04 |        |        |
| Mains type  | unearthed mains     |        |        |
| Insulating material group   | IIIa                |        |        |
| Comparative tracking index (IEC 60112:2003-01)                    | CTI 225             |        |        |
| Rated insulation voltage  | 160 V               | 160 V  | 250 V  |
| Rated surge voltage   | 2.5 kV              | 2.5 kV | 2.5 kV |
| Degree of pollution   | 3                   | 2      | 2      |
| Overvoltage category  | III                 | III    | II     |
| Minimum clearance case A (inhomogeneous field)                    | 1.5 mm              | 1.5 mm | 1.5 mm |
| Minimum value of the creepage path requirement in acc. with table | 2.5 mm              | 1.6 mm | 2.5 mm |

1843282 MCV 1,5/ 8-GF-3,5


15 Current carrying capacity/derating curves

|                         |   |
|-------------------------|---|
| Specification           | IEC 61984:2001-06                             |
| Note                    | Representation based on IEC 60512-5-2:2002-02 |
| Note                    | For number of positions, see diagram          |
| Reduction factor        | 0.8   |
| Conductor cross section | 1.5 mm <sup>2</sup>                           |


Type: FMC 1,5/...-STF-3,5 with MCV 1,5/...-GF-3,5





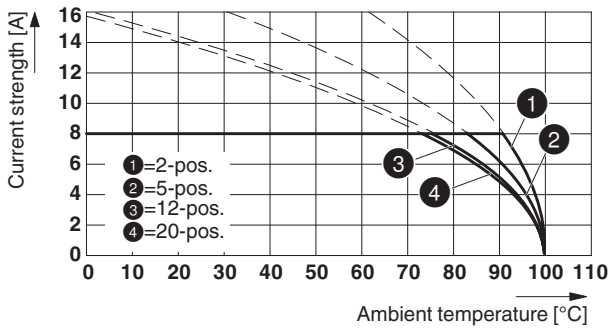Type: MC 1,5/...-STF-3,5 with MCV 1,5/...-GF-3,5



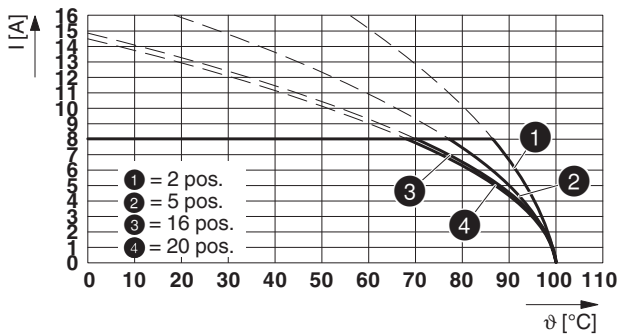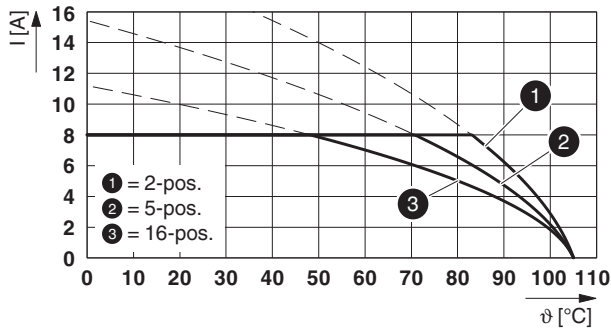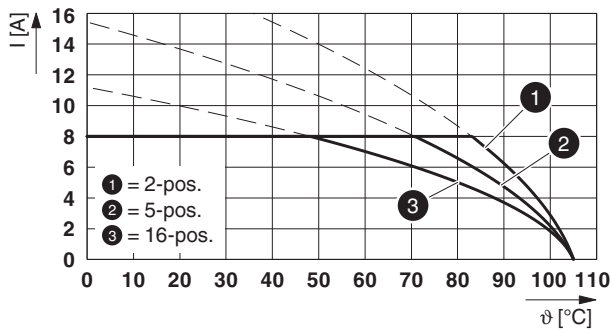Type: FK-MCP 1,5/...-STF-3,5 with MCV 1,5/...-GF-3,5



**1843282 MCV 1,5/ 8-GF-3,5****Type: MCVR 1,5/...-STF-3,5 with MCV 1,5/...-GF-3,5****Type: MCWV 1,5/...-STF-3,5 with MCV 1,5/...-GF-3,5****15.1 Vibration test**







|                        |                        |
|------------------------|------------------------|
| Specification          | IEC 60068-2-6:2007-12  |
| Result                 | Test passed            |
| Frequency              | 10 - 150 - 10 Hz       |
| Sweep speed            | 1 octave/min           |
| Amplitude              | 0.35 mm (10 - 60.1 Hz) |
| Acceleration           | 5 g (60.1 - 150 Hz)    |
| Test duration per axis | 2.5 h                  |
| Test directions        | X-, Y- and Z-axis      |
| Note                   |                        |

**15.2 Insulation resistance**

|  |                       |
|--|-----------------------|
| Specification                                | IEC 60512-3-1:2002-02 |
| Result                                       | Test passed           |
| Insulation resistance, neighboring positions | > 5 MΩ                |

## 1843282 MCV 1,5/ 8-GF-3,5

## 16 Approvals / Certificates

| CSA                                        | Voltage [V] | Current [A] | Cross section [AWG] | Cross section [mm <sup>2</sup> ] |
|---|-------------|-------------|---------------------|----------------------------------|
| <b>Usegroup B</b>   |             |             |                     |                                  |
|   | 300 V       | 8 A         | -                   | -                                |
| <b>Usegroup D</b>   |             |             |                     |                                  |
|   | 300 V       | 8 A         | -                   | -                                |
| IECEE CB Scheme                            | Voltage [V] | Current [A] | Cross section [AWG] | Cross section [mm <sup>2</sup> ] |
|   | 160 V       | 8 A         | -                   | -                                |
| EAC                                        |             |             |                     |                                  |
| VDE Gutachten mit Fertigungsüberwachung    | Voltage [V] | Current [A] | Cross section [AWG] | Cross section [mm <sup>2</sup> ] |
|   | 160 V       | 8 A         | -                   | -                                |
| cULus Recognized                           | Voltage [V] | Current [A] | Cross section [AWG] | Cross section [mm <sup>2</sup> ] |
| <b>Usegroup B</b>   |             |             |                     |                                  |
|   | 300 V       | 8 A         | -                   | -                                |
| <b>Usegroup D</b>   |             |             |                     |                                  |
|   | 300 V       | 8 A         | -                   | -                                |
| VDE Gutachten mit Fertigungsüberwachung  | Voltage [V] | Current [A] | Cross section [AWG] | Cross section [mm <sup>2</sup> ] |
|   | 160 V       | 8 A         | -                   | -                                |

**1843282 MCV 1,5/ 8-GF-3,5****17 Commercial Data**

|                    |  |
|--------------------|--|
| Order No.          | 1843282  |
| Type               | MCV 1,5/ 8-GF-3,5                                    |
| Pieces per package | 100  |
| Net weight         | 3.107 g  |
| GTIN               | 4017918112479  |
|                    | Information that applies locally, see link on page 1 |
| Country of origin  | Information that applies locally, see link on page 1 |

**18 corresponding plugs**





| Order No. | Type                  |
|-----------|-----------------------|
| 1772760   | TFMC 1,5/ 8-STF-3,5   |
| 1847181   | MC 1,5/ 8-STF-3,5     |
| 1863068   | MCVW 1,5/ 8-STF-3,5   |
| 1863369   | MCVR 1,5/ 8-STF-3,5   |
| 1940156   | FK-MCP 1,5/ 8-STF-3,5 |
| 1966156   | FMC 1,5/ 8-STF-3,5    |

**19 Accessories**

| Description   | Order No. | Type                    |
|---|-----------|-------------------------|
|   | 0804073   | SK 3,5/2,8:FORTL.ZAHLEN |
| Coding profile, is inserted into the slot on the plug or inverted header, red insulating material | 1734634   | CP-MSTB                 |

## 1843282 MCV 1,5/ 8-GF-3,5

## 20 Combination tests

**MCV 1,5/..-GF**

IEC 61984

**Mechanical tests (A)**

Insertion/withdrawal force per position

**FMC 1,5/..-STF**

IEC 61984

approx. 8 N / 6 N

**MC 1,5/..-STF**

IEC 61984

approx. 6 N / 5 N

**FK-MCP 1,5/..-STF**

IEC 61984

approx. 8 N / 6 N

**MCVR 1,5/..-STF**

IEC 61984

approx. 9 N / 4 N

Polarization when inserted  
Requirement >20 N

Test passed

Test passed

Test passed

Test passed

Contact holder in insert  
Requirements >20 N

Test passed

Test passed

Test passed

Test passed

**Durability tests (B)**Contact resistance R<sub>1</sub> 1st level

1.7 mΩ

1.8 mΩ

1.5 mΩ

3.3 mΩ

Contact resistance R<sub>1</sub> 2nd level

Insertion/withdrawal cycles

25

25

25

25

Contact resistance R<sub>2</sub>

1.6 mΩ

2.2 mΩ

1.6 mΩ

3.4 mΩ

Rated impulse voltage at sea level  
Voltage waveform ≥ (1.2/50 μs)

2.95 kV

2.95 kV

2.95 kV

2.95 kV

Power-frequency withstand voltage  
Voltage waveform ≥ (50/60 Hz)

1.39 kV

1.39 kV

1.39 kV

1.39 kV

**Thermal tests (C)**

Tested number of positions

20

20

20

16

Tested conductor cross section

1.5 mm<sup>2</sup>1.5 mm<sup>2</sup>1.5 mm<sup>2</sup>1.5 mm<sup>2</sup>

Test current

8 A

8 A DC

8 A

8 A

Upper limiting temperature  
Requirements < 100°C

Test passed

Test passed

Test passed

Test passed

**Climatic tests (D)**

Test sequence 1: low temperature storage

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

Test sequence 2: heat storage

100 °C/168 h

100 °C/168 h

100 °C/168 h

105 °C/168 h

Test sequence 3: noxious gas storage  
(ISO 6988)0.2 dm<sup>3</sup> SO<sub>2</sub> on 300 dm<sup>3</sup>/  
40 °C/1 cycle0.2 dm<sup>3</sup> SO<sub>2</sub> on 300 dm<sup>3</sup>/  
40 °C/1 cycle0.2 dm<sup>3</sup> SO<sub>2</sub> on 300 dm<sup>3</sup>/  
40 °C/1 cycle0.2 dm<sup>3</sup> SO<sub>2</sub> on 300 dm<sup>3</sup>/  
40 °C/1 cycleRated impulse voltage at sea level  
Voltage waveform ≥ (1.2/50 μs)

2.95 kV

2.95 kV

2.95 kV

2.95 kV

Power-frequency withstand voltage  
Voltage waveform ≥ (50/60 Hz)

1.39 kV

1.39 kV

1.39 kV

1.39 kV

**Environmental and endurance tests (E)**

Specification

IEC 61984:2008-10


IEC 61984:2008-10

IEC 61984:2008-10

IEC 61984:2008-10

Degree of protection

Finger safety with IP20  
test fingerFinger safety with IP20  
test fingerFinger safety with IP20  
test fingerFinger safety with IP20  
test finger

**1843282 MCV 1,5/ 8-GF-3,5****MCV 1,5/..-GF**

IEC 61984

**Mechanical tests (A)**

Insertion/withdrawal force per position

Polarization when inserted  
Requirement >20 NContact holder in insert  
Requirements >20 N**Durability tests (B)**Contact resistance R<sub>1</sub> 1st levelContact resistance R<sub>1</sub> 2nd level

Insertion/withdrawal cycles

Contact resistance R<sub>2</sub>Rated impulse voltage at sea level  
Voltage waveform ≥ (1.2/50 μs)Power-frequency withstand voltage  
Voltage waveform ≥ (50/60 Hz)**Thermal tests (C)**

Tested number of positions

Tested conductor cross section

Test current

Upper limiting temperature  
Requirements < 100°C**Climatic tests (D)**


Test sequence 1: low temperature storage

Test sequence 2: heat storage

Test sequence 3: noxious gas storage  
(ISO 6988)Rated impulse voltage at sea level  
Voltage waveform ≥ (1.2/50 μs)Power-frequency withstand voltage  
Voltage waveform ≥ (50/60 Hz)**Environmental and endurance tests (E)**

Specification

Degree of protection

**MCVW 1,5/..-STF**

IEC 61984

approx. 9 N / 4 N

Test passed

Test passed

3.3 mΩ

25

3.4 mΩ

2.95 kV

1.39 kV

16

1.5 mm<sup>2</sup>

8 A

Test passed

-40 °C/2 h

105 °C/168 h

0.2 dm<sup>3</sup> SO<sub>2</sub> on 300 dm<sup>3</sup>/  
40 °C/1 cycle

2.95 kV

1.39 kV

IEC 61984:2008-10

Finger safety with IP20  
test finger