


Order No.: 1776919

Type: MSTBV 2,5/ 5-GF

PCB header

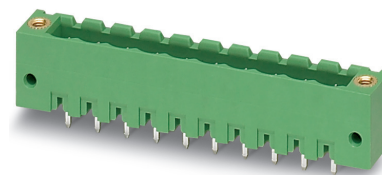

The figure shows a 10-position version of the product

1 Main features



- | | | | |
|-------------------------|---------------------|------------------------|---------------------|
| • No. of pos. | 5 | • Nominal current | 12 A |
| • Nominal cross section | 2.5 mm ² | • Nominal voltage | 320 V |
| • Color | green (6021) | • Connection direction | 90 ° |
| • Pitch | 5 mm | • Type of packaging | packed in cardboard |
| • Mounting type | Wave soldering | | |

2 Your advantages

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Well-known mounting principle allows worldwide use
- ✓ Vertical connection enables multi-row arrangement on the PCB




Make sure you always use the latest documentation.
It can be downloaded at: phoenixcontact.net/product/1776919

1776919 MSTBV 2,5/ 5-GF**3 Table of contents**

1	Main features.....	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	General Technical Data	4
6	Mounting.....	5
7	Material properties.....	5
8	Dimensions.....	6
9	Series drawing.....	7
10	Product notes	8
11	Application.....	8
12	Packaging information	8
13	Mechanical tests.....	9
14	Insertion and withdrawal forces	10
15	Electrical tests	11
16	Current carrying capacity/derating curves	12
17	Environmental and durability tests	14
18	Approvals / Certificates.....	15
19	Commercial Data.....	16
20	corresponding plugs	16
21	Accessories.....	16
22	Combination tests.....	17

1776919 MSTBV 2,5/ 5-GF

4 3D model in PDF can be activated (Acrobat Reader only)

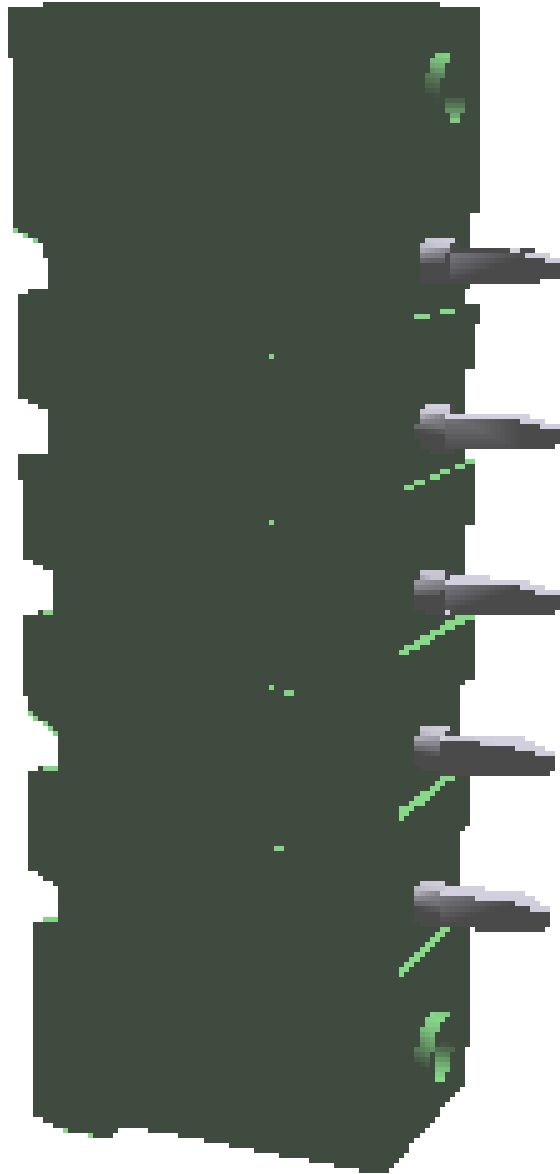

1776919 MSTBV 2,5/ 5-GF**5 General Technical Data****5.1 item properties**

Order No.	1776919
Type	MSTBV 2,5/ 5-GF
Plug-in system	CLASSIC COMBICON
Product type	PCB header
Type of contact	Male connector
Range of articles	MSTBV 2,5/..-GF
Pitch	5 mm
Number of positions	5
Number of levels	1
Number of connections	5
Number of potentials	5
Mounting type	Wave soldering
Connection direction of the connector to the PCB	90 °
Pin layout	Linear pinning
Solder pins per potential	1
Type	Standard

1776919 MSTBV 2,5/ 5-GF**6 Mounting****6.1 Flange mounting**

Type of locking	Screw locking
Mounting flange	Threaded flange
Torque	0.3 Nm

7 Material properties**7.1 Material of metal parts**

Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface contact area	Nickel (1.3 - 3 µm Ni) , Tin (3 - 5 µm Sn)
Soldering area surface	Nickel (1.3 - 3 µm Ni) , Tin (3 - 5 µm Sn)
Surface characteristics	Tin-plated
Insulating material data	Housing
Color	green (6021)
Insulating material	PBT
Insulating material group	IIIa
CTI according to IEC 60112	225
Flammability rating according to UL 94	V0

1776919 MSTBV 2,5/ 5-GF**8 Dimensions****8.1 Dimensions for the product**

Length	8.6 mm
Width	35 mm
Height (without solder pin)	12 mm
Total height	15.9 mm
Solder pin [P]	3.9 mm

1776919 MSTBV 2,5/ 5-GF**10 Product notes****10.1 General information**

Notes on operation

In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load.

11 Application**12 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	250
Outer packaging type	Carton

12.1 Temperature limit values

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C ... 100 °C (dependent on the derating curve)

1776919 MSTBV 2,5/ 5-GF**13 Mechanical tests****13.1 Visual examination**

Specification	IEC 61984:2008-10
Visual examination	Test passed
Specification	IEC 60512-1-1:2002-02

13.2 Dimensional test

Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02

13.3 Resistance of marking

Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12

13.4 Polarization and coding

Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N

13.5 Contact retention in insert

Contact holder in insert Requirements >20 N	Test passed
Specification	IEC 60512-15-1:2008-05

1776919 MSTBV 2,5/ 5-GF**14 Insertion and withdrawal forces**

Insertion and withdrawal force	
Specification	Test passed
No. of cycles	25
Insertion strength per pos. approx.	8 N
Withdraw strength per pos. approx.	6 N

1776919 MSTBV 2,5/ 5-GF**15 Electrical tests**

Rated current / conductor cross section	12 A / 2.5 mm ²
Rated insulation voltage (III/2)	320 V
Rated surge voltage (III/2)	4 kV
Contact resistance	2.4 mΩ
Degree of pollution	2

15.1 Air and creepage distances


Component	PCB header		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	IIIa		
Comparative tracking index (IEC 60112:2003-01)	CTI 225		
Rated insulation voltage	250 V	320 V	400 V
Rated surge voltage	4 kV	4 kV	4 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	3 mm	3 mm	3 mm
Minimum value of the creepage path requirement in acc. with table	4 mm	3.2 mm	4 mm

1776919 MSTBV 2,5/ 5-GF


16 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Note	For number of positions, see diagram
Reduction factor	0.8
Conductor cross section	2.5 mm ²


Type: MSTBT 2,5/...-STF with MSTBV 2,5/...-GF

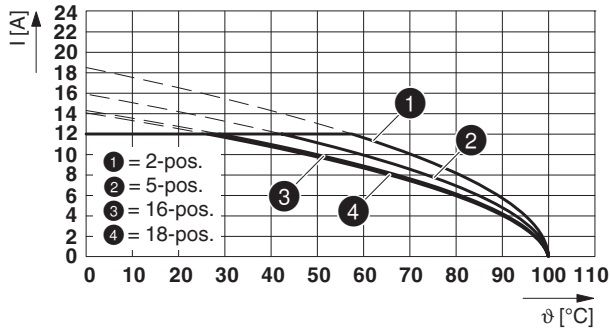

Type: FKCT 2.5/...-STF with MSTBV 2.5/...-GF

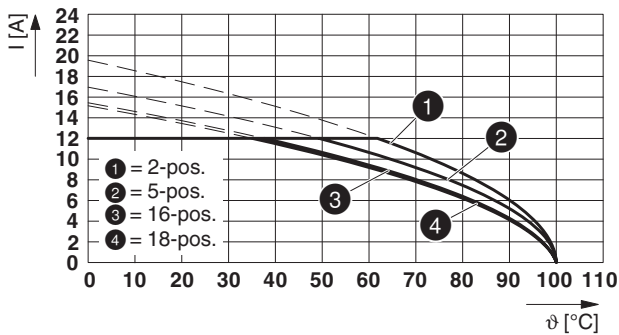


Type: FKCVR 2,5/...-STF with MSTBV 2,5/...-GF

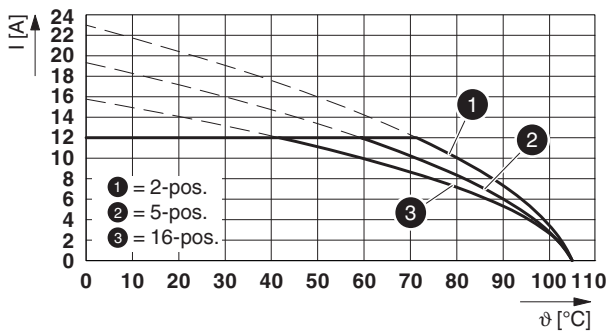

1776919 MSTBV 2,5/ 5-GF

Type: FKCVW 2,5/...-STF with MSTBV 2,5/...-GF

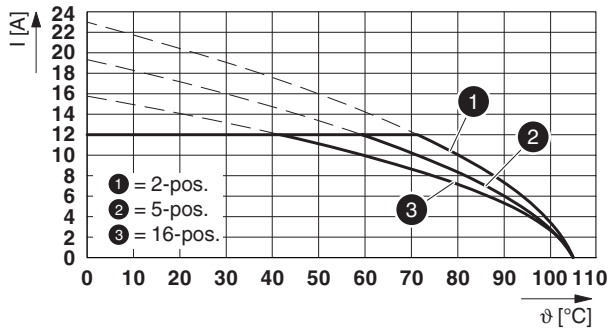

1776919 MSTBV 2,5/ 5-GF**17 Environmental and durability tests****17.1 Vibration test**

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
Note	The connected conductor loops were guided to the test sample at a distance of approx. 10 cm.

17.2 Insulation resistance

Specification	IEC 60512-3-1:2002-02
Result	Test passed
Insulation resistance, neighboring positions	> 5 MΩ

1776919 MSTBV 2,5/ 5-GF

18 Approvals / Certificates

CSA 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
Usegroup B				
	300 V	12 A	-	-
Usegroup D				
	300 V	10 A	-	-
IECEE CB Scheme 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	12 A	-	-
EAC 				
VDE Zeichengenehmigung 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	12 A	-	-
cULus Recognized 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
Usegroup B				
	300 V	12 A	-	-
Usegroup D				
	300 V	10 A	-	-
DNV GL 				
RS 				
VDE Zeichengenehmigung 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	12 A	-	-

1776919 MSTBV 2,5/ 5-GF**19 Commercial Data**

Order No.	1776919
Type	MSTBV 2,5/ 5-GF
Pieces per package	250
Net weight	3.621 g
GTIN	4017918039080
	Information that applies locally, see link on page 1
	Information that applies locally, see link on page 1

20 corresponding plugs





Order No.	Type
1718148	QC 1,5/ 5-STF
1732991	FKCN 2,5/ 5-STF
1779673	FRONT-MSTB 2,5/ 5-STF
1786860	MSTB 2,5/ 5-STF
1835313	MVSTBW 2,5/ 5-STF
1835504	MVSTBR 2,5/ 5-STF
1909430	FKCT 2,5/ 5-STF
1909919	FKCVR 2,5/ 5-STF
1910238	FKCVW 2,5/ 5-STF
1910555	FKC 2,5/ 5-STF
1970906	SMSTB 2,5/ 5-STF
1974957	FKCS 2,5/ 5-STF

21 Accessories

Description	Order No.	Type
Coding section, inserted into the recess in the header or the inverted plug, red insulating material	1734401	CR-MSTB
Keying cap, for forming sections, plugs onto header pin, green insulating material	1755477	MSTB-BL
	0804183	SK 5/3,8:FORTL.ZAHLEN
	0805409	SK 5/3,8:UNBEDRUCKT
	0805072	SK 5/3,8:SO
Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm	1051993	B-STIFT

1776919 MSTBV 2,5/ 5-GF

22 Combination tests

**MSTBV 2,5/..-GF**

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

Polarization when inserted
Requirement >20 NContact holder in insert
Requirements >20 N**Durability tests (B)**Contact resistance R₁ 1st levelContact resistance R₁ 2nd level

Insertion/withdrawal cycles

Contact resistance R₂Rated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)**Thermal tests (C)**

Tested number of positions

Tested conductor cross section

Test current

Upper limiting temperature
Requirements < 100°C**Climatic tests (D)**

Test sequence 1: low temperature storage

Test sequence 2: heat storage

Test sequence 3: noxious gas storage
(ISO 6988)Rated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)**Environmental and endurance tests (E)**

Specification

Degree of protection

MSTBT 2,5/..-STF

IEC 61984

approx. 8 N / 6 N

Test passed

Test passed

2.4 mΩ

25

2.4 mΩ

4.8 kV

2.21 kV

18

2.5 mm²

12 A

Test passed

-40 °C/2 h

100 °C/168 h

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

4.8 kV

2.21 kV

IEC 61984:2008-10

Finger safety with IP20
test finger**FKCT 2,5/..-STF**

IEC 61984

approx. 8 N / 6 N

Test passed

Test passed

2.4 mΩ

25

2.4 mΩ

4.8 kV

2.21 kV

18

2.5 mm²

12 A

Test passed

-40 °C/2 h

100 °C/168 h

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

4.8 kV

2.21 kV

IEC 61984:2008-10

Finger safety with IP20
test finger**FKCVR 2,5/..-STF**

IEC 61984

approx. 10 N / 7 N

Test passed

Test passed

2 mΩ

25

2.2 mΩ

4.8 kV

2.21 kV

12

2.5 mm²

12 A

Test passed

-40 °C/2 h

105 °C/168 h

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

4.8 kV

2.21 kV

IEC 61984:2008-10

Finger safety with IP20
test finger**FKCVW 2,5/..-STF**

IEC 61984

approx. 10 N / 7 N

Test passed

Test passed

2 mΩ

25

2.2 mΩ

4.8 kV

2.21 kV

12

2.5 mm²

12 A

Test passed

-40 °C/2 h

105 °C/168 h

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

4.8 kV

2.21 kV

IEC 61984:2008-10

Finger safety with IP20
test finger