


Order No.: 1776922

Type: MSTBV 2,5/ 6-GF

PCB header

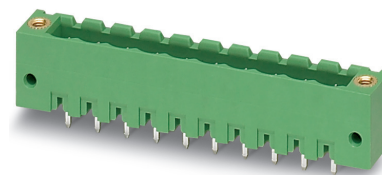

The figure shows a 10-position version of the product

1 Main features



- | | | | |
|-------------------------|---------------------|------------------------|---------------------|
| • No. of pos. | 6 | • Nominal current | 12 A |
| • Nominal cross section | 2.5 mm ² | • Nominal voltage | 320 V |
| • Color | green (6021) | • Connection direction | 90 ° |
| • Pitch | 5 mm | • Type of packaging | packed in cardboard |
| • Mounting type | Wave soldering | | |

2 Your advantages

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Well-known mounting principle allows worldwide use
- ✓ Vertical connection enables multi-row arrangement on the PCB




Make sure you always use the latest documentation.
It can be downloaded at: phoenixcontact.net/product/1776922

1776922 MSTBV 2,5/ 6-GF**3 Table of contents**

1	Main features.....	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	General Technical Data	4
6	Mounting.....	5
7	Material properties.....	5
8	Dimensions.....	6
9	Series drawing.....	7
10	Product notes	8
11	Application.....	8
12	Packaging information	8
13	Mechanical tests.....	9
14	Insertion and withdrawal forces	10
15	Electrical tests	11
16	Current carrying capacity/derating curves	12
17	Environmental and durability tests	14
18	Approvals / Certificates.....	15
19	Commercial Data.....	16
20	corresponding plugs	16
21	Accessories.....	16
22	Combination tests.....	17

1776922 MSTBV 2,5/ 6-GF

4 3D model in PDF can be activated (Acrobat Reader only)

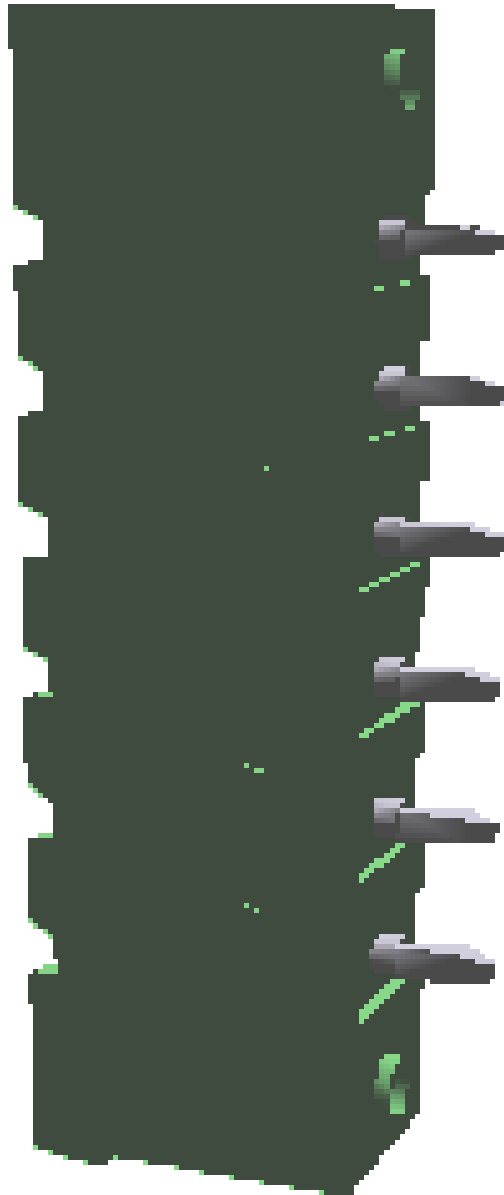

1776922 MSTBV 2,5/ 6-GF**5 General Technical Data****5.1 item properties**

Order No.	1776922
Type	MSTBV 2,5/ 6-GF
Plug-in system	CLASSIC COMBICON
Product type	PCB header
Type of contact	Male connector
Range of articles	MSTBV 2,5/..-GF
Pitch	5 mm
Number of positions	6
Number of levels	1
Number of connections	6
Number of potentials	6
Mounting type	Wave soldering
Connection direction of the connector to the PCB	90 °
Pin layout	Linear pinning
Solder pins per potential	1
Type	Standard

1776922 MSTBV 2,5/ 6-GF**6 Mounting****6.1 Flange mounting**

Type of locking	Screw locking
Mounting flange	Threaded flange
Torque	0.3 Nm

7 Material properties**7.1 Material of metal parts**


Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface contact area	Nickel (1.3 - 3 µm Ni) , Tin (3 - 5 µm Sn)
Soldering area surface	Nickel (1.3 - 3 µm Ni) , Tin (3 - 5 µm Sn)
Surface characteristics	Tin-plated
Insulating material data	Housing
Color	green (6021)
Insulating material	PBT
Insulating material group	IIIa
CTI according to IEC 60112	225
Flammability rating according to UL 94	V0

1776922 MSTBV 2,5/ 6-GF**8 Dimensions****8.1 Dimensions for the product**

Length	8.57 mm
Width	39.95 mm
Height (without solder pin)	12 mm
Total height	15.9 mm
Solder pin [P]	3.9 mm

1776922 MSTBV 2,5/ 6-GF

9 Series drawing

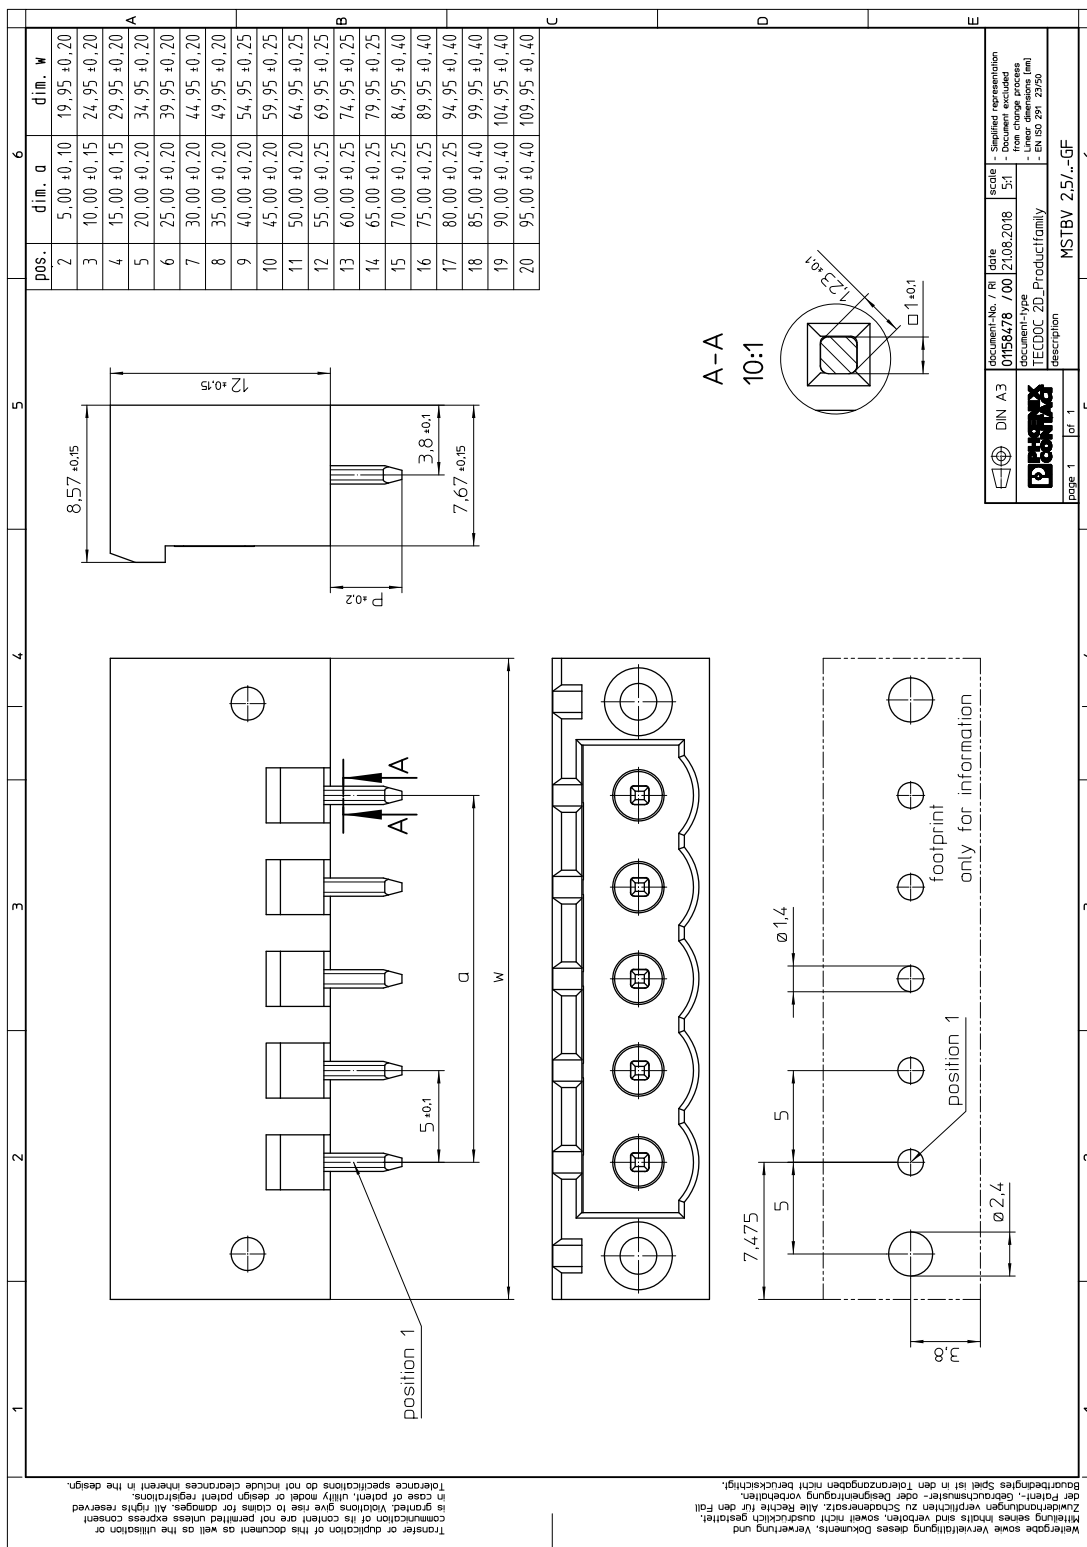

DIN A3	document-No. / R / date	scale	Simplified representation
	0156478 / 00 / 21.08.2018	5:1	- Reduced drawing
	document-type		- Free change process
	TECDOC 2D_Productfamily		- Linear dimensions (mm)
	description		- EN ISO 291 2950
page 1	of 1		
MSTBV 2,5/ 6-GF			

Werteangaben sowie Verfertigung dieses Dokuments, Vervielfältigung und
Mittlung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.
Zurücksendungen sind verpflichtend zu senden. Alle Rechte für den Fall
der Patent-, Gebrauchsmuster- oder Designrechte vorbehalten.
Bourkundliches Spiel ist in den Toleranzen nicht berücksichtigt.

Transfer or duplication of this document as well as the utilization or
communication of its content are not permitted unless express consent
is granted. Violations give rise to claims for damages. All rights reserved
in case of patent, utility model or design patent registers.
Tolerance specifications do not include clearances inherent in the design.

1776922 MSTBV 2,5/ 6-GF**10 Product notes****10.1 General information**

Notes on operation

In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load.

11 Application**12 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	100

12.1 Temperature limit values

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C ... 100 °C (dependent on the derating curve)

1776922 MSTBV 2,5/ 6-GF**13 Mechanical tests****13.1 Visual examination**

Specification	IEC 61984:2008-10
Visual examination	Test passed
Specification	IEC 60512-1-1:2002-02

13.2 Dimensional test

Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02

13.3 Resistance of marking

Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12

13.4 Polarization and coding

Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N

13.5 Contact retention in insert

Contact holder in insert Requirements >20 N	Test passed
Specification	IEC 60512-15-1:2008-05

1776922 MSTBV 2,5/ 6-GF**14 Insertion and withdrawal forces**

Insertion and withdrawal force	
	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	8 N
Withdraw strength per pos. approx.	6 N

1776922 MSTBV 2,5/ 6-GF**15 Electrical tests**

Rated current / conductor cross section	12 A / 2.5 mm ²
Rated insulation voltage (III/2)	320 V
Rated surge voltage (III/2)	4 kV
Contact resistance	2.4 mΩ
Degree of pollution	2

15.1 Air and creepage distances


Component	PCB header		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	IIIa		
Comparative tracking index (IEC 60112:2003-01)	CTI 225		
Rated insulation voltage	250 V	320 V	400 V
Rated surge voltage	4 kV	4 kV	4 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	3 mm	3 mm	3 mm
Minimum value of the creepage path requirement in acc. with table	4 mm	3.2 mm	4 mm

1776922 MSTBV 2,5/ 6-GF


16 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Note	For number of positions, see diagram
Reduction factor	0.8
Conductor cross section	2.5 mm ²


Type: MSTBT 2,5/...-STF with MSTBV 2,5/...-GF

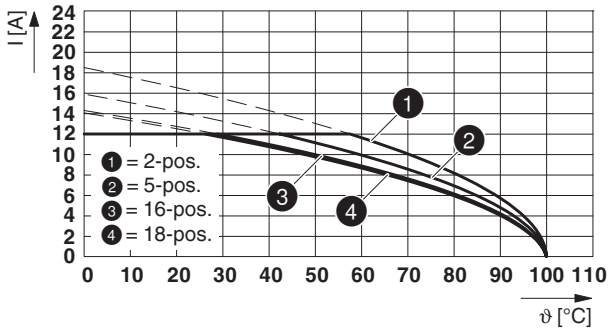

Type: FKCT 2.5/...-STF with MSTBV 2.5/...-GF

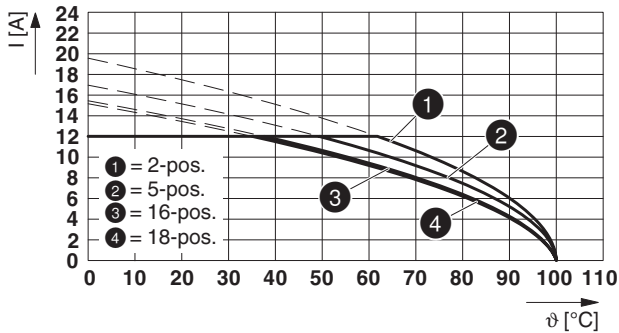


Type: FKCVR 2,5/...-STF with MSTBV 2,5/...-GF

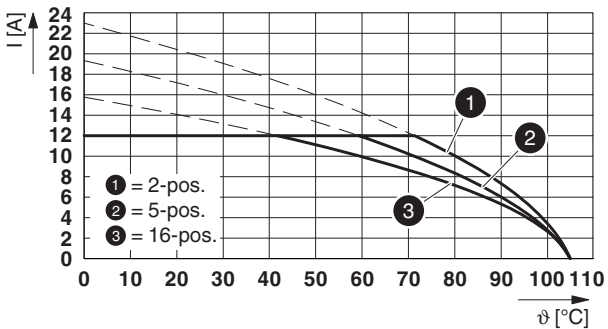

1776922 MSTBV 2,5/ 6-GF

Type: FKCVW 2,5/...-STF with MSTBV 2,5/...-GF

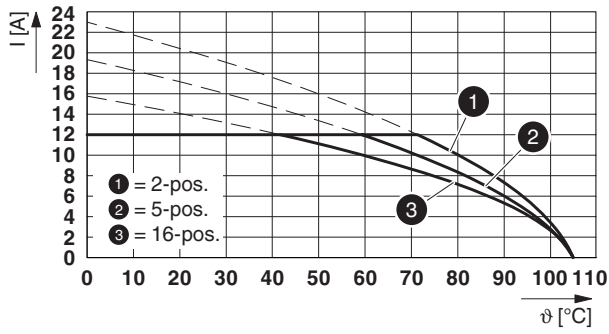

1776922 MSTBV 2,5/ 6-GF**17 Environmental and durability tests****17.1 Vibration test**


Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
Note	The connected conductor loops were guided to the test sample at a distance of approx. 10 cm.

17.2 Insulation resistance

Specification	IEC 60512-3-1:2002-02
Result	Test passed
Insulation resistance, neighboring positions	> 5 MΩ

1776922 MSTBV 2,5/ 6-GF

18 Approvals / Certificates

CSA 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
Usegroup B				
	300 V	12 A	-	-
Usegroup D				
	300 V	10 A	-	-
IECEE CB Scheme 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	12 A	-	-
EAC 				
VDE Zeichengenehmigung 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	12 A	-	-
cULus Recognized 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
Usegroup B				
	300 V	12 A	-	-
Usegroup D				
	300 V	10 A	-	-
DNV GL 				
RS 				
VDE Zeichengenehmigung 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	12 A	-	-

1776922 MSTBV 2,5/ 6-GF**19 Commercial Data**

Order No.	1776922
Type	MSTBV 2,5/ 6-GF
Pieces per package	100
Net weight	4.139 g
GTIN	4017918039097
	Information that applies locally, see link on page 1
	Information that applies locally, see link on page 1

20 corresponding plugs





Order No.	Type
1718151	QC 1,5/ 6-STF
1733000	FKCN 2,5/ 6-STF
1779686	FRONT-MSTB 2,5/ 6-STF
1786873	MSTB 2,5/ 6-STF
1835326	MVSTBW 2,5/ 6-STF
1835517	MVSTBR 2,5/ 6-STF
1909443	FKCT 2,5/ 6-STF
1909922	FKCVR 2,5/ 6-STF
1910241	FKCVW 2,5/ 6-STF
1910568	FKC 2,5/ 6-STF
1970919	SMSTB 2,5/ 6-STF
1974960	FKCS 2,5/ 6-STF

21 Accessories

Description	Order No.	Type
Coding section, inserted into the recess in the header or the inverted plug, red insulating material	1734401	CR-MSTB
Keying cap, for forming sections, plugs onto header pin, green insulating material	1755477	MSTB-BL
	0804183	SK 5/3,8:FORTL.ZAHLEN
	0805409	SK 5/3,8:UNBEDRUCKT
	0805072	SK 5/3,8:SO
Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm	1051993	B-STIFT

1776922 MSTBV 2,5/ 6-GF

22 Combination tests

**MSTBV 2,5/..-GF**

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

MSTBT 2,5/..-STF

IEC 61984

approx. 8 N / 6 N

FKCT 2,5/..-STF

IEC 61984

approx. 8 N / 6 N

FKCVR 2,5/..-STF

IEC 61984

approx. 10 N / 7 N

FKCVW 2,5/..-STF

IEC 61984

approx. 10 N / 7 N

Polarization when inserted
Requirement >20 N

Test passed

Test passed

Test passed

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Test passed

Test passed

Test passed

Durability tests (B)Contact resistance R₁ 1st level

2.4 mΩ

2.4 mΩ

2 mΩ

2 mΩ

Contact resistance R₁ 2nd level

Insertion/withdrawal cycles

25

25

25

25

Contact resistance R₂

2.4 mΩ

2.4 mΩ

2.2 mΩ

2.2 mΩ

Rated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

2.21 kV

2.21 kV

2.21 kV

2.21 kV

Thermal tests (C)

Tested number of positions

18

18

12

12

Tested conductor cross section

2.5 mm²2.5 mm²2.5 mm²2.5 mm²

Test current

12 A

12 A

12 A

12 A

Upper limiting temperature
Requirements < 100°C

Test passed

Test passed

Test passed

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

Test sequence 2: heat storage

100 °C/168 h

100 °C/168 h

105 °C/168 h

105 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycleRated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

2.21 kV

2.21 kV

2.21 kV

2.21 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10

IEC 61984:2008-10

IEC 61984:2008-10

IEC 61984:2008-10

Degree of protection

Finger safety with IP20
test fingerFinger safety with IP20
test fingerFinger safety with IP20
test fingerFinger safety with IP20
test finger