


Data sheet

Order No.: 1924415

Type: MSTBV 2,5 HC/ 2-GF

PCB header

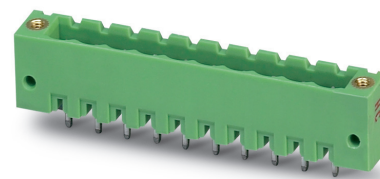

The figure shows a 10-position version of the product

1 Main features



- | | | | |
|-------------------------|---------------------|------------------------|---------------------|
| • No. of pos. | 2 | • Nominal current | 16 A |
| • Nominal cross section | 2.5 mm ² | • Nominal voltage | 320 V |
| • Color | green (6021) | • Connection direction | 90 ° |
| • Pitch | 5 mm | • Type of packaging | packed in cardboard |
| • Mounting type | Wave soldering | | |

2 Your advantages

- ✓ Well-known mounting principle allows worldwide use
- ✓ Screwable flange for superior mechanical stability
- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies



Make sure you always use the latest documentation.

It can be downloaded at: phoenixcontact.net/product/1924415

1924415 MSTBV 2,5 HC/ 2-GF**3 Table of contents**

1	Main features.....	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	General Technical Data	4
6	Mounting.....	5
7	Material properties.....	5
8	Dimensions.....	6
9	Series drawing.....	7
10	Product notes	8
11	Application.....	8
12	Packaging information	8
13	Mechanical tests.....	9
14	Insertion and withdrawal forces	10
15	Electrical tests	11
16	Current carrying capacity/derating curves	12
17	Approvals / Certificates.....	14
18	Commercial Data.....	15
19	corresponding plugs	15
20	Accessories.....	15
21	Combination tests.....	16

1924415 MSTBV 2,5 HC/ 2-GF

4 3D model in PDF can be activated (Acrobat Reader only)



1924415 MSTBV 2,5 HC/ 2-GF**5 General Technical Data****5.1 item properties**

Order No.	1924415
Type	MSTBV 2,5 HC/ 2-GF
Plug-in system	POWER COMBICON 2,5
Product type	PCB header
Type of contact	Male connector
Range of articles	MSTBV 2,5 HC/...-GF
Pitch	5 mm
Number of positions	2
Number of levels	1
Number of connections	2
Number of potentials	2
Mounting type	Wave soldering
Connection direction of the connector to the PCB	90 °
Pin layout	Linear pinning
Solder pins per potential	1
Type	Standard

1924415 MSTBV 2,5 HC/ 2-GF**6 Mounting****6.1 Flange mounting**

Type of locking	Screw locking
Mounting flange	Threaded flange
Torque	0.3 Nm

7 Material properties**7.1 Material of metal parts**

Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface contact area	Nickel (1 - 3 µm Ni) , Tin (3 - 5 µm Sn)
Soldering area surface	Nickel (1 - 3 µm Ni) , Tin (3 - 5 µm Sn)
Surface characteristics	Tin-plated
Insulating material data	Housing
Color	green (6021)
Insulating material	PA
Insulating material group	I
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Glow wire flammability index GWFI according to EN 60695-2-12	850
Glow wire ignition temperature GWIT according to EN 60695-2-13	775
Temperature for the ball pressure test according to EN 60695-10-2	125 °C

1924415 MSTBV 2,5 HC/ 2-GF**8 Dimensions****8.1 Dimensions for the product**

Length	8.6 mm
Width	20 mm
Height (without solder pin)	12 mm
Total height	15.9 mm
Solder pin [P]	3.9 mm

1924415 MSTBV 2,5 HC/ 2-GF**10 Product notes****10.1 General information**

Notes on operation

In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load.

11 Application**12 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	50
Outer packaging type	Carton

12.1 Temperature limit values

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C ... 100 °C (dependent on the derating curve)

1924415 MSTBV 2,5 HC/ 2-GF**13 Mechanical tests****13.1 Visual examination**

Specification	IEC 61984:2008-10
Visual examination	Test passed
Specification	IEC 60512-1-1:2002-02

13.2 Dimensional test

Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02

13.3 Resistance of marking

Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12

13.4 Polarization and coding

Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N

13.5 Contact retention in insert

Contact holder in insert Requirements >20 N	Test passed
Specification	IEC 60512-15-1:2008-05

1924415 MSTBV 2,5 HC/ 2-GF**14 Insertion and withdrawal forces**

Insertion and withdrawal force	
Specification	Test passed
No. of cycles	50
Insertion strength per pos. approx.	6 N
Withdraw strength per pos. approx.	5 N

1924415 MSTBV 2,5 HC/ 2-GF**15 Electrical tests****15.1 Electrical data**

Rated current / conductor cross section	16 A / 2.5 mm ²
Rated insulation voltage (III/2)	320 V
Rated surge voltage (III/2)	4 kV
Contact resistance	1 mΩ
Degree of pollution	2

15.2 Air and creepage distances


Component	PCB header		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	320 V	320 V	630 V
Rated surge voltage	4 kV	4 kV	4 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	3 mm	3 mm	3 mm
Minimum value of the creepage path requirement in acc. with table	4 mm	1.6 mm	3.2 mm

1924415 MSTBV 2,5 HC/ 2-GF


16 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Note	For number of positions, see diagram
Reduction factor	0.8
Conductor cross section	2.5 mm ²


Type: FKC 2,5 HC/...-STF with MSTBV 2,5 HC/...-GF

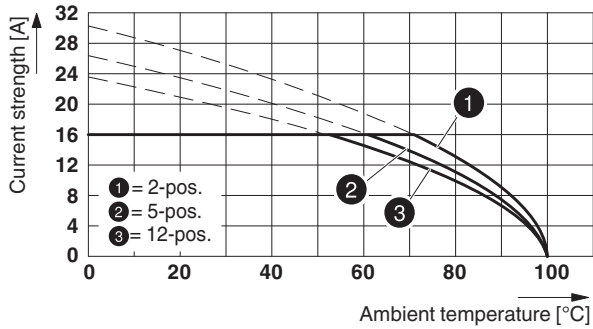

Type: MVSTBR 2,5 HC/...-STF with MSTBV 2,5 HC/...-GF

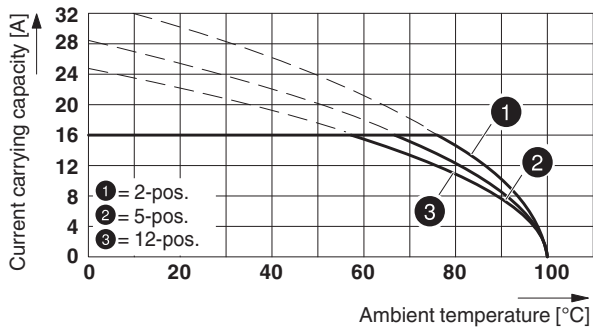

Type: MSTB 2,5 HC/...-STF with MSTBV 2,5 HC/...-GF

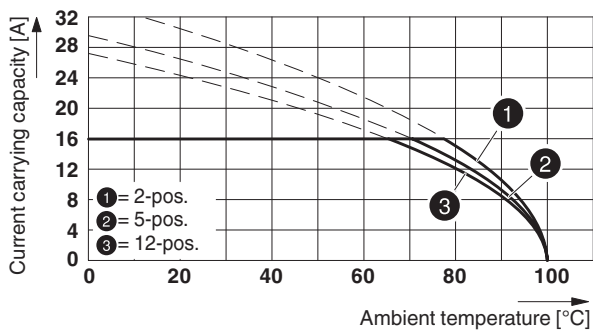

16.1 Vibration test

1924415 MSTBV 2,5 HC/ 2-GF

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
Note	The connected conductor loops were guided to the test sample at a distance of approx. 10 cm.

16.2 Insulation resistance

Specification	IEC 60512-3-1:2002-02
Result	Test passed
Insulation resistance, neighboring positions	> 5 MΩ

1924415 MSTBV 2,5 HC/ 2-GF**17 Approvals / Certificates**

IECEE CB Scheme 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	16 A	-	-
EAC 				
VDE Zeichengenehmigung 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	16 A	-	-
cULus Recognized 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
Usegroup B	300 V	16 A	-	-
Usegroup D	300 V	10 A	-	-
VDE Zeichengenehmigung 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	16 A	-	-

1924415 MSTBV 2,5 HC/ 2-GF**18 Commercial Data**

Order No.	1924415
Type	MSTBV 2,5 HC/ 2-GF
Pieces per package	50
Net weight	1.886 g
GTIN	4017918607609
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

19 corresponding plugs



Order No.	Type
1912074	MSTB 2,5 HC/ 2-STF
1912511	MVSTBR 2,5 HC/ 2-STF
1912951	MVSTBW 2,5 HC/ 2-STF
1942264	FKC 2,5 HC/ 2-STF

20 Accessories

Description	Order No.	Type
Coding section, inserted into the recess in the header or the inverted plug, red insulating material	1734401	CR-MSTB
	0804183	SK 5/3,8:FORTL.ZAHLEN
Keying cap, for forming sections, plugs onto header pin, green insulating material	1755477	MSTB-BL

1924415 MSTBV 2,5 HC/ 2-GF

21 Combination tests

**MSTBV 2,5 HC/..-GF****FKC 2,5 HC/..-STF****MVSTBR 2,5 HC/..-STF****MSTB 2,5 HC/..-STF**

IEC 61984

IEC 61984

IEC 61984

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

approx. 6 N / 5 N

approx. 8 N / 7 N

approx. 4 N / 3 N

Polarization when inserted
Requirement >20 N

Test passed

Test passed

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Test passed

Test passed

Durability tests (B)Contact resistance R₁ 1st level

1 mΩ

0.8 mΩ

0.6 mΩ

Contact resistance R₁ 2nd level

Insertion/withdrawal cycles

50

50

50

Contact resistance R₂

1 mΩ

0.9 mΩ

0.7 mΩ

Rated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

2.21 kV

2.21 kV

2.21 kV

Thermal tests (C)

Tested number of positions

12

12

12

Tested conductor cross section

2.5 mm²2.5 mm²2.5 mm²

Test current

16 A

16 A DC

16 A DC

Upper limiting temperature
Requirements < 100°C

Test passed

Test passed

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

Test sequence 2: heat storage

100 °C/168 h

100 °C/168 h

100 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycleRated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

2.21 kV

2.21 kV

2.21 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10

IEC 61984:2008-10

IEC 61984:2008-10

Degree of protection

Finger safety with IP20
test fingerFinger safety with IP20
test fingerFinger safety with IP20
test finger