

Data sheet

Order No.: 1767410

Type: SMSTBA 2,5/ 6-G-5,08

PCB header



The figure shows a 10-position version of the product

1 Main features



- | | | | |
|-------------------------|---------------------|------------------------|---------------------|
| • No. of pos. | 6 | • Nominal current | 12 A |
| • Nominal cross section | 2.5 mm ² | • Nominal voltage | 320 V |
| • Color | green (6021) | • Connection direction | 45 ° |
| • Pitch | 5.08 mm | • Type of packaging | packed in cardboard |
| • Mounting type | Wave soldering | | |

2 Your advantages

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Well-known mounting principle allows worldwide use
- ✓ Angled connection enables multi-row arrangement on the PCB



Make sure you always use the latest documentation.


It can be downloaded at: phoenixcontact.net/product/1767410

3 Table of contents

1	Main features.....	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	General Technical Data	4
6	Mounting.....	5
7	Material properties.....	5
8	Dimensions.....	6
9	Series drawing.....	7
10	Product notes	8
11	Application.....	8
12	Packaging information	8
13	Mechanical tests.....	9
14	Insertion and withdrawal forces	10
15	Electrical tests	11
16	Current carrying capacity/derating curves	12
17	Environmental and durability tests	16
18	Approvals / Certificates.....	17
19	Commercial Data.....	18
20	corresponding plugs	18
21	Accessories.....	18
22	Combination tests.....	19

1767410 SMSTBA 2,5/ 6-G-5,08

4 3D model in PDF can be activated (Acrobat Reader only)

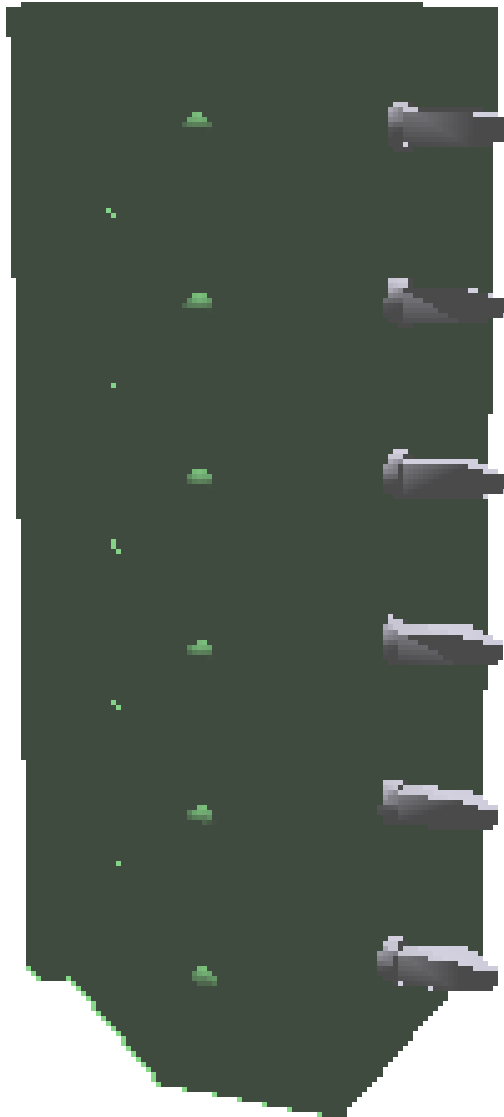

1767410 SMSTBA 2,5/ 6-G-5,08**5 General Technical Data****5.1 item properties**

Order No.	1767410
Type	SMSTBA 2,5/ 6-G-5,08
Plug-in system	CLASSIC COMBICON
Product type	PCB header
Type of contact	Male connector
Range of articles	SMSTBA 2,5/..-G
Pitch	5.08 mm
Number of positions	6
Number of levels	1
Number of connections	6
Number of potentials	6
Mounting type	Wave soldering
Connection direction of the connector to the PCB	45 °
Pin layout	Linear pinning
Solder pins per potential	1
Type	Standard

1767410 SMSTBA 2,5/ 6-G-5,08**6 Mounting****6.1 Flange mounting**

Type of locking	without
Mounting flange	without

7 Material properties**7.1 Material of metal parts**


Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface contact area	Nickel (2 - 3 µm Ni) , Tin (5 - 7 µm Sn)
Soldering area surface	Nickel (2 - 3 µm Ni) , Tin (5 - 7 µm Sn)
Surface characteristics	Tin-plated
Insulating material data	Housing
Color	green (6021)
Insulating material	PA
Insulating material group	I
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Glow wire flammability index GWFI according to EN 60695-2-12	850
Glow wire ignition temperature GWIT according to EN 60695-2-13	775
Temperature for the ball pressure test according to EN 60695-10-2	125 °C

1767410 SMSTBA 2,5/ 6-G-5,08**8 Dimensions****8.1 Dimensions for the product**

Length	16.5 mm
Width	32.48 mm
Height (without solder pin)	14.8 mm
Total height	18.3 mm
Solder pin [P]	3.5 mm

1767410 SMSTBA 2,5/ 6-G-5,08

9 Series drawing

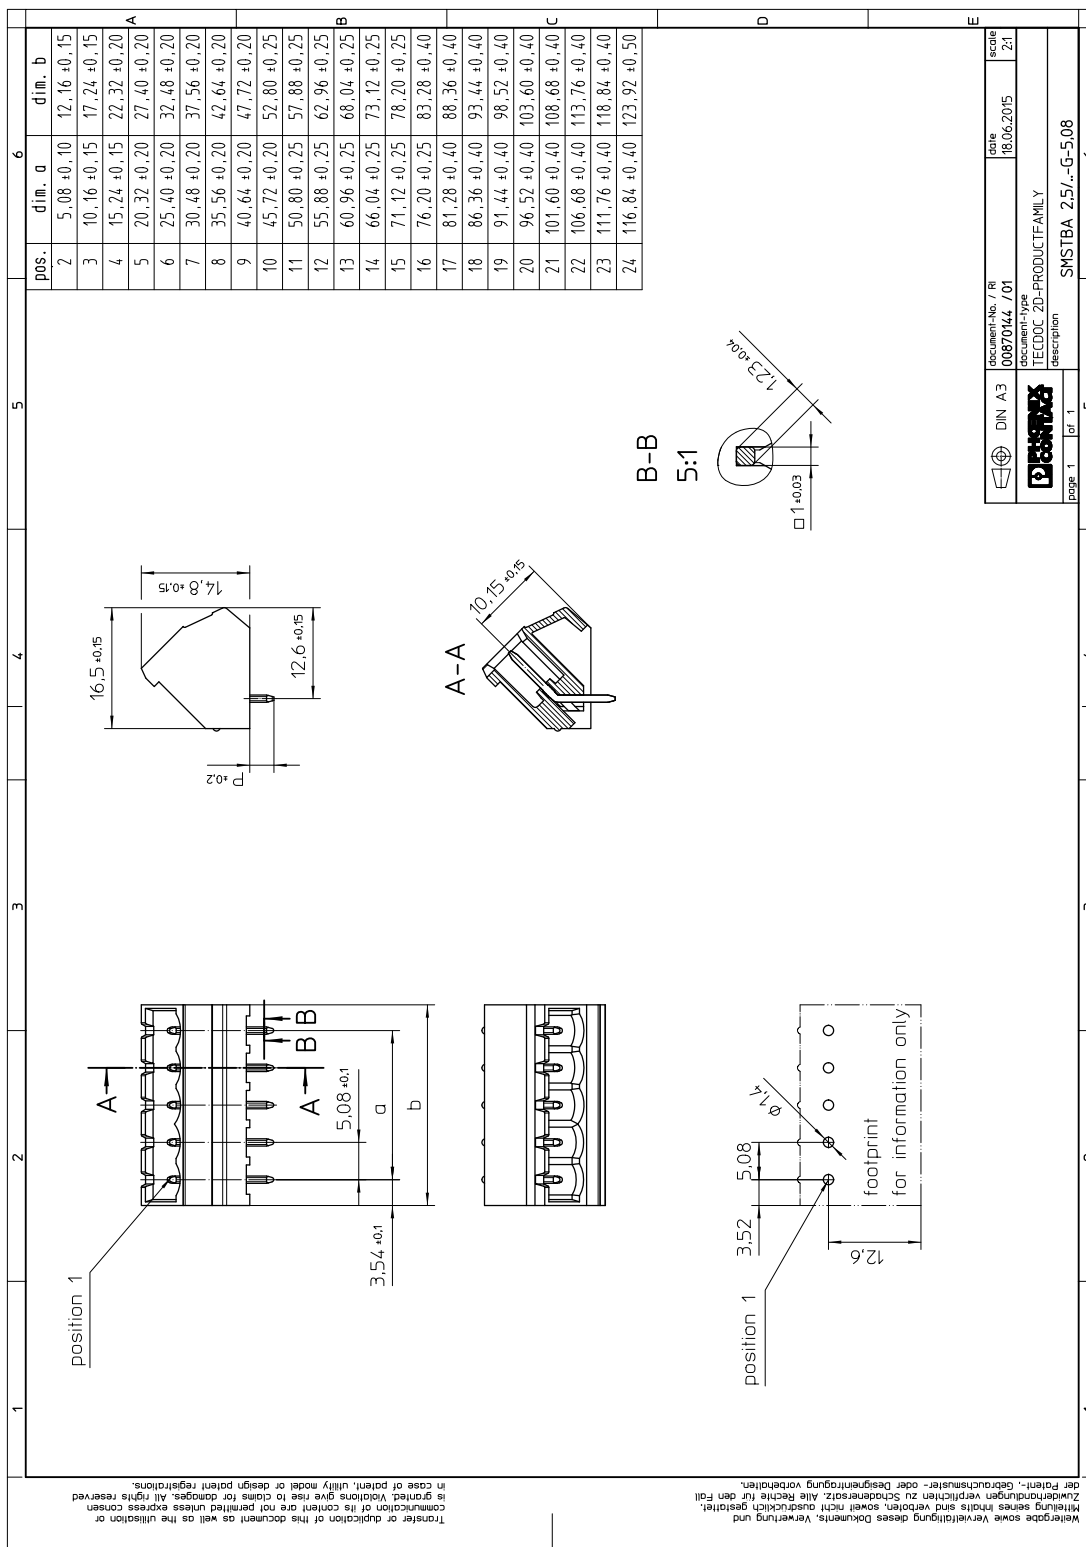

DIN A3	document-No. / RI 00870144 / 01	date 18.06.2015	scale 1:2:1
TECDOC	document-type TECDOC 2D-PRODUCTFAMILY		
page 1	description SMSTBA 2,5/..-G-5,08		

1767410 SMSTBA 2,5/ 6-G-5,08**10 Product notes****10.1 General information**

Notes on operation

In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load.

11 Application**12 Packaging information**

Type of packaging

packed in cardboard

Pieces per package

50

12.1 Temperature limit values

Ambient temperature (storage/transport)

-40 °C ... 70 °C

Ambient temperature (assembly)

-5 °C ... 100 °C

Ambient temperature (operation)

-40 °C ... 100 °C (dependent on the derating curve)

1767410 SMSTBA 2,5/ 6-G-5,08**13 Mechanical tests****13.1 Visual examination**

Specification	IEC 61984:2008-10
Visual examination	Test passed
Specification	IEC 60512-1-1:2002-02

13.2 Dimensional test

Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02

13.3 Resistance of marking

Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12

13.4 Polarization and coding

Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N

13.5 Contact retention in insert

Contact holder in insert Requirements >20 N	Test passed
Specification	IEC 60512-15-1:2008-05

1767410 SMSTBA 2,5/ 6-G-5,08**14 Insertion and withdrawal forces**

Insertion and withdrawal force	
Specification	Test passed
No. of cycles	25
Insertion strength per pos. approx.	11 N
Withdraw strength per pos. approx.	6 N

1767410 SMSTBA 2,5/ 6-G-5,08**15 Electrical tests**

Rated current / conductor cross section	12 A / 2.5 mm ²
Rated insulation voltage (III/2)	320 V
Rated surge voltage (III/2)	4 kV
Contact resistance	2.3 mΩ
Degree of pollution	2

15.1 Air and creepage distances


Component	PCB header		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	320 V	320 V	630 V
Rated surge voltage	4 kV	4 kV	4 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	3 mm	3 mm	3 mm
Minimum value of the creepage path requirement in acc. with table	4 mm	1.6 mm	3.2 mm

1767410 SMSTBA 2,5/ 6-G-5,08


16 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Note	For number of positions, see diagram
Reduction factor	0.8
Conductor cross section	2.5 mm ²


Type: SMSTB 2,5/...-ST with SMSTBA 2,5/...-G

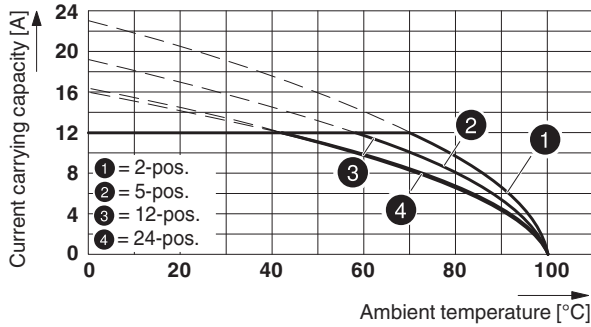

Type: MSTBT 2,5/...-ST-5,08 with SMSTBA 2,5/...-G-5,08

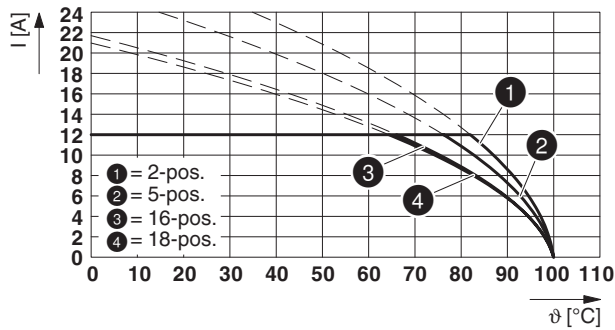


Type: FKCN 2,5/...-ST-5,08 with SMSTBA 2,5/...-G-5,08

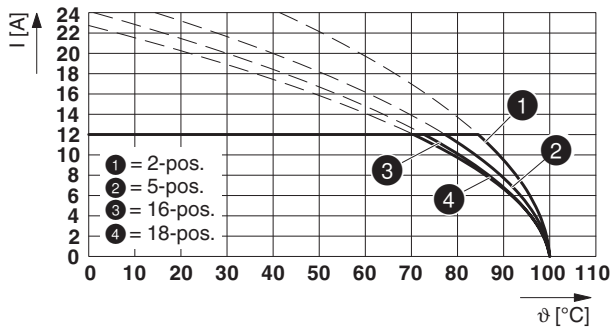


1767410 SMSTBA 2,5/ 6-G-5,08


Type: MSTB 2,5/...-ST-5,08 with SMSTBA 2,5/...-G-5,08

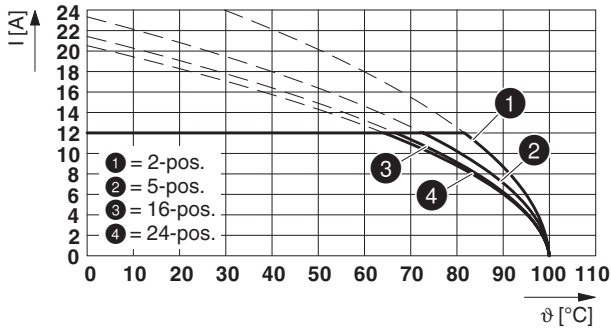

Type: MVSTBR 2,5/...-ST-5,08 with SMSTBA 2,5/...-G-5,08

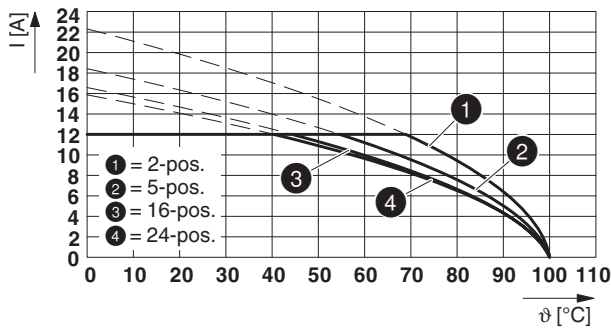


Type: MSTBP 2,5/...-ST-5,08 with SMSTBA 2,5/...-G-5,08

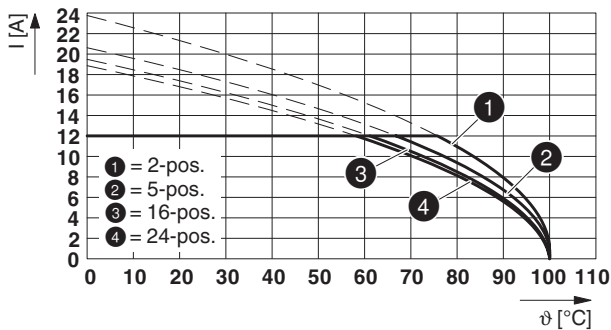


1767410 SMSTBA 2,5/ 6-G-5,08


Type: FKCS 2,5/...-ST-5,08 with SMSTBA 2,5/...-G-5,08

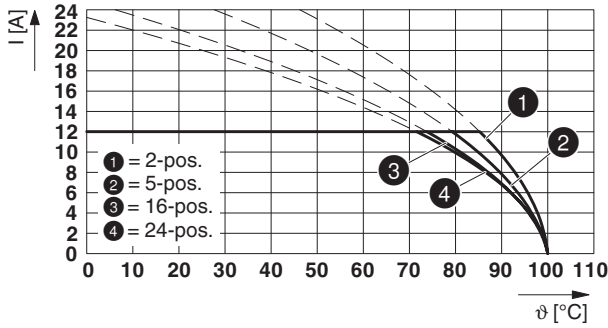


Type: FKCT 2,5/...-ST-5,08 with SMSTBA 2,5/...-G-5,08

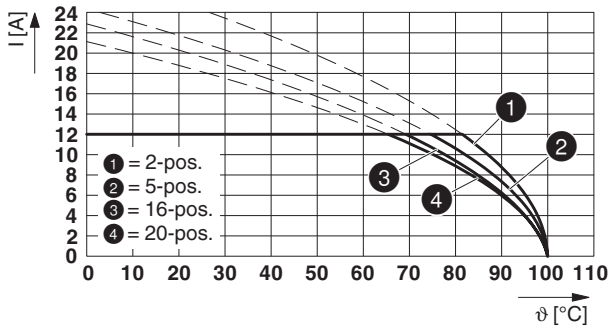

Type: FKCV(W/R) 2,5/...-ST-5,08 with SMSTBA 2,5/...-G-5,08

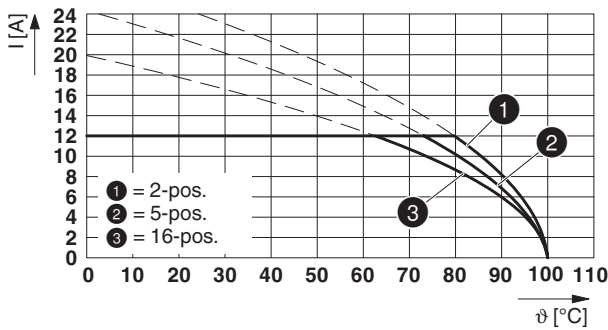


Type: FRONT-MSTB 2,5/...-ST-5,08 with SMSTBA 2,5/...-G-5,08

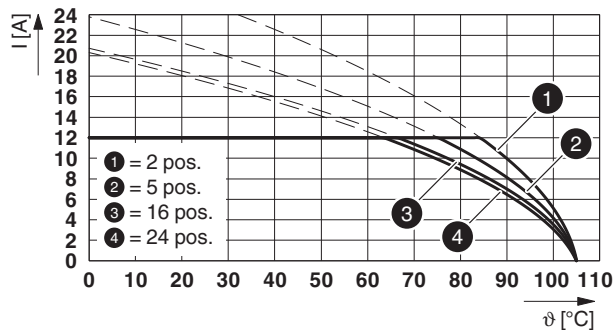

1767410 SMSTBA 2,5/ 6-G-5,08

Type: TFKC 2,5/...-ST-5,08 with SMSTBA 2,5/...-G-5,08

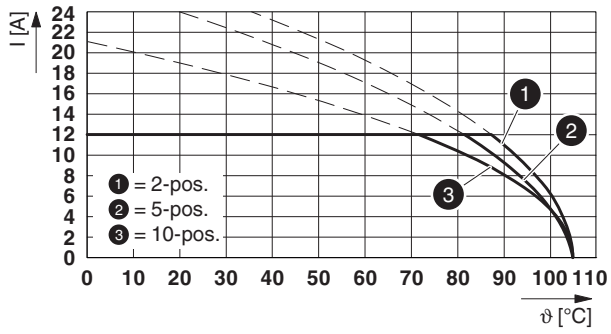

1767410 SMSTBA 2,5/ 6-G-5,08**17 Environmental and durability tests****17.1 Vibration test**







Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
Note	The connected conductor loops were guided to the test sample at a distance of approx. 10 cm.

17.2 Insulation resistance

Specification	IEC 60512-3-1:2002-02
Result	Test passed
Insulation resistance, neighboring positions	> 5 MΩ

1767410 SMSTBA 2,5/ 6-G-5,08

18 Approvals / Certificates

CSA 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
Usegroup B				
	300 V	15 A	-	-
Usegroup D				
	300 V	10 A	-	-
IECEE CB Scheme 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	12 A	-	-
EAC 				
VDE Zeichengenehmigung 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	12 A	-	-
cULus Recognized 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
Usegroup B				
	300 V	15 A	-	-
Usegroup D				
	300 V	10 A	-	-
VDE Zeichengenehmigung 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	12 A	-	-

1767410 SMSTBA 2,5/ 6-G-5,08**19 Commercial Data**

Order No.	1767410
Type	SMSTBA 2,5/ 6-G-5,08
Pieces per package	50
Net weight	3.773 g
GTIN	4017918033224
	Information that applies locally, see link on page 1
	Information that applies locally, see link on page 1

20 corresponding plugs


Order No.	Type
1719040	TVMSTB 2,5/ 6-ST-5,08
1754607	FKCN 2,5/ 6-ST-5,08
1757051	MSTB 2,5/ 6-ST-5,08
1769052	MSTBP 2,5/ 6-ST-5,08
1776126	MSTB 2,5/ 6-STZ-5,08
1777329	FRONT-MSTB 2,5/ 6-ST-5,08
1781027	MSTBT 2,5/ 6-ST-5,08
1792281	MVSTBR 2,5/ 6-ST-5,08
1792799	MVSTBW 2,5/ 6-ST-5,08
1808858	MSTBC 2,5/ 6-ST-5,08
1809543	MSTBC 2,5/ 6-STZ-5,08
1824162	MSTBU 2,5/ 6-STD-5,08
1824395	MSTBU 2,5/ 6-ST-5,08-FL
1826322	SMSTB 2,5/ 6-ST-5,08
1831359	MSTBVK 2,5/ 6-ST-5,08
1833852	UMSTBVK 2,5/ 6-ST-5,08
1853052	TMSTBP 2,5/ 6-ST-5,08
1873090	FKC 2,5/ 6-ST-5,08
1873692	FKCVW 2,5/ 6-ST-5,08
1873993	FKCVR 2,5/ 6-ST-5,08
1883297	QC 1/ 6-ST-5,08
1902152	FKCT 2,5/ 6-ST-5,08
1962642	TFKC 2,5/ 6-ST-5,08
1975118	FKCS 2,5/ 6-ST-5,08

21 Accessories

Description	Order No.	Type
Coding section, inserted into the recess in the header or the inverted plug, red insulating material	1734401	CR-MSTB
	0804293	SK 5,08/3,8:FORTL.ZAHLEN
Keying cap, for forming sections, plugs onto header pin, green insulating material	1755477	MSTB-BL

1767410 SMSTBA 2,5/ 6-G-5,08

22 Combination tests

**SMSTBA 2,5/..-G**

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

approx. 11 N / 6 N

approx. 8 N / 6 N

approx. 8 N / 6 N

approx. 8 N / 6 N

Polarization when inserted
Requirement >20 N

Test passed

Test passed

Test passed

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Test passed

Test passed

Test passed

Durability tests (B)Contact resistance R₁ 1st level

2.3 mΩ

1.2 mΩ

1.1 mΩ

1.3 mΩ

Contact resistance R₁ 2nd level

Insertion/withdrawal cycles

25

25

25

25

Contact resistance R₂

2.4 mΩ

1.3 mΩ

1.1 mΩ

1.3 mΩ

Rated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

2.21 kV

2.21 kV

2.21 kV

2.21 kV

Thermal tests (C)

Tested number of positions

24

18

18

24

Tested conductor cross section

2.5 mm²2.5 mm²2.5 mm²2.5 mm²

Test current

12 A

12 A

12 A

12 A

Upper limiting temperature
Requirements < 100°C

Test passed

Test passed

Test passed

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

Test sequence 2: heat storage

100 °C/168 h

100 °C/168 h

100 °C/168 h

100 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycleRated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

2.21 kV

2.21 kV

2.21 kV

2.21 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10


IEC 61984:2008-10

IEC 61984:2008-10

IEC 61984:2008-10

Degree of protection

Finger safety with IP20
test fingerFinger safety with IP20
test fingerFinger safety with IP20
test fingerFinger safety with IP20
test finger

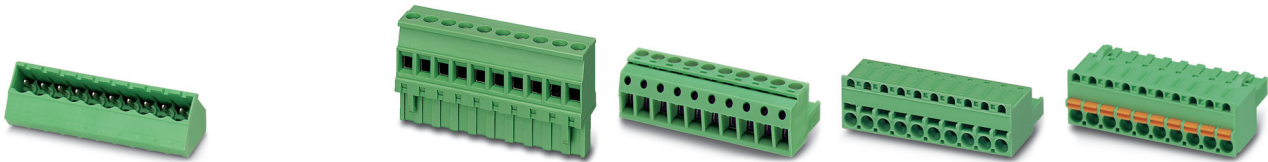1767410 SMSTBA 2,5/ 6-G-5,08**SMSTBA 2,5/..-G**

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

MVSTBR 2,5/..-ST

IEC 61984

approx. 8 N / 6 N

MSTBP 2,5/..-ST

IEC 61984

approx. 8 N / 6 N

FKCS 2,5/..-ST

IEC 61984

approx. 8 N / 6 N

FKCT 2,5/..-ST

IEC 61984

approx. 8 N / 6 N

Polarization when inserted
Requirement >20 N

Test passed

Test passed

Test passed

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Test passed

Test passed

Test passed

Durability tests (B)Contact resistance R_1 1st level2.3 m Ω 1.4 m Ω 0.9 m Ω 1.1 m Ω Contact resistance R_1 2nd level

Insertion/withdrawal cycles

25

25

25

25

Contact resistance R_2 2.3 m Ω 1.4 m Ω 1 m Ω 1.3 m Ω Rated impulse voltage at sea level
Voltage waveform \geq (1.2/50 μ s)

4.8 kV

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform \geq (50/60 Hz)

2.21 kV

2.21 kV

2.21 kV

2.21 kV

Thermal tests (C)

Tested number of positions

24

24

24

20

Tested conductor cross section

2.5 mm²2.5 mm²2.5 mm²2.5 mm²

Test current

12 A

12 A

12 A

12 A

Upper limiting temperature
Requirements < 100°C

Test passed

Test passed

Test passed

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

Test sequence 2: heat storage

100 °C/168 h

100 °C/168 h

100 °C/168 h

100 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycleRated impulse voltage at sea level
Voltage waveform \geq (1.2/50 μ s)

4.8 kV

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform \geq (50/60 Hz)

2.21 kV

2.21 kV

2.21 kV

2.21 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10

IEC 61984:2008-10



IEC 61984:2008-10

IEC 61984:2008-10

Degree of protection

Finger safety with IP20
test fingerFinger safety with IP20
test fingerFinger safety with IP20
test fingerFinger safety with IP20
test finger

1767410 SMSTBA 2,5/ 6-G-5,08

**SMSTBA 2,5/..-G****FKCVR 2,5/..-ST****FRONT-MSTB 2,5/..-ST****TFKC 2,5/..-ST**

IEC 61984

IEC 61984

IEC 61984

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

approx. 8 N / 6 N

approx. 12 N / 9 N

approx. 12 N / 11 N

Polarization when inserted
Requirement >20 N

Test passed

Test passed

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Test passed

Test passed

Durability tests (B)Contact resistance R₁ 1st level

1.2 mΩ

1.5 mΩ

1.1 mΩ

Contact resistance R₁ 2nd level

Insertion/withdrawal cycles

25

25

25

Contact resistance R₂

1.3 mΩ

1.5 mΩ

1.1 mΩ

Rated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

1.39 kV

2.21 kV

2.21 kV

Thermal tests (C)

Tested number of positions

16

24

10

Tested conductor cross section

2.5 mm²2.5 mm²2.5 mm²

Test current

12 A

12 A

12 A

Upper limiting temperature
Requirements < 100°C

Test passed

Test passed

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-40 °C/2 h

-40 °C/2 h

-40 °C/2 h

Test sequence 2: heat storage

100 °C/168 h

105 °C/168 h

105 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycleRated impulse voltage at sea level
Voltage waveform ≥ (1.2/50 μs)

4.8 kV

4.8 kV

4.8 kV

Power-frequency withstand voltage
Voltage waveform ≥ (50/60 Hz)

1.39 kV

2.21 kV

2.21 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10

IEC 61984:2008-10

IEC 61984:2008-10

Degree of protection

Finger safety with IP20
test fingerFinger safety with IP20
test fingerFinger safety with IP20
test finger