



THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REV.	REVISION		
	DESCRIPTION	DATE	APPROVED
A	Changed HDMI/M Mold Design / Changed Cable Spec / Changed From Crimp Terminal to Solder Terminal	03-12-07	DP
B	Updated Specifications	09-08-11	LY
C	Updated Graphics, Notes, and Pin out	02-07-14	LY

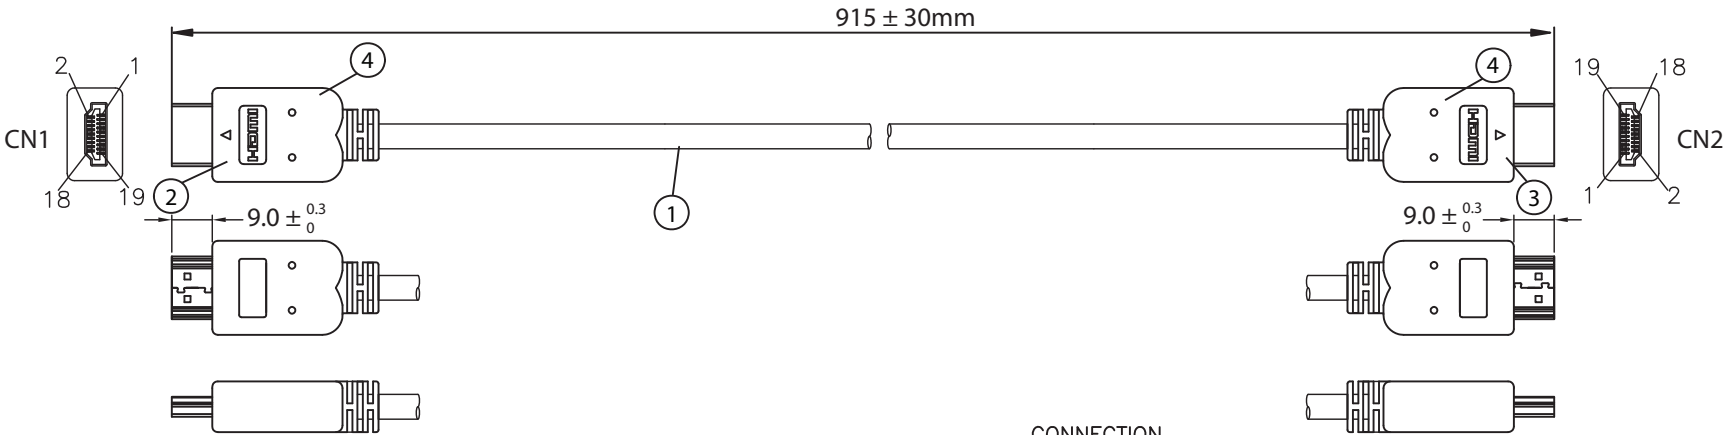

CONNECTION

CN1	CN2	CN1	CN2
1 WHITE	13 VIOLET	13 VIOLET	13
3 BROWN	3 WHITE	14 WHITE	14
2 DRAIN	2 YELLOW	15 YELLOW	15
4 WHITE	4 ORANGE	16 ORANGE	16
6 RED	6 GRAY	17 GRAY	17
5 DRAIN	5 BLACK	18 BLACK	18
7 WHITE	7 RED	19 RED	19
9 GREEN	9 SHELL DRAIN & Braid	SHELL DRAIN & Braid	9
8 DRAIN	8 SHELL	SHELL	8
10 WHITE	10		
12 BLUE	12		
11 DRAIN	11		

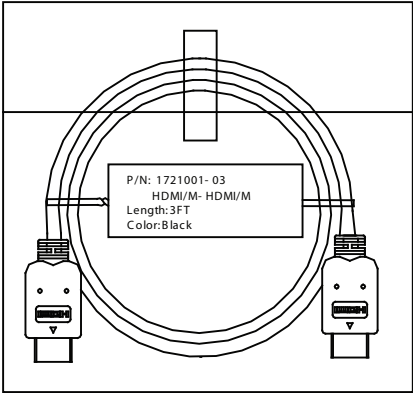

- NOTES:
- CABLE: UL20276
(30AWG*1PR+EAM)*4+30AWG*1PR+30AWG*5C+AEB (AL) 65%
OUTER JACKET: BLACK, OD: $6.0 \pm 0.2\text{mm}$
 - CONNECTOR: HDMI A 19P MALE
INSULATOR: BLACK PBT
PIN G/F
NICKEL PLATED SHELL
 - CONNECTOR: HDMI A 19P MALE
INSULATOR: BLACK PBT
PIN G/F
NICKEL PLATED SHELL
 - PVC MOLDED: 45P BLACK
 - ELECTRICAL TEST:
<1>.100% OPEN SHORT & MISS WIRE TEST
<2>.INSULATION RESISTANCE: AC 300V DC400V 10M ohm MIN.
<3>.CONDUCTOR RESISTANCE: 3 ohm MAX.
 - 1PC/POLYBAG

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. WCI DIVISION		
		Part Number:	1721001-03	RoHS Compliant
0-1	0.15	Description: HDMI/M - HDMI/M		
1-6	0.20			
6-18	0.30	Drawn / Date B.Grubb 01-25-07	UNIT: mm	REV. C
18-50	0.50		Checked / Date	Approved / Date
50-120	0.70			
120-250	0.90			
250-500	1.20			
			01-25-07	JJH / 01-25-07