
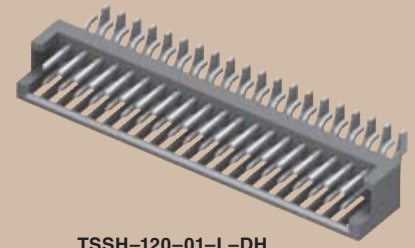


TSSH-115-01-L-D



TSSH-120-01-L-DH

(2,54mm) .100"

TSSH SERIES

SHROUDED .025" SQ POST HEADERS

Mates with:
SSW, SSQ, SSM

Important Note:
This Series will only mate with SSW, SSQ & SSM Series

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?TSSH

Insulator Material:
Black Liquid Crystal Polymer



Terminal Material:
Phosphor Bronze

Plating:

Au or Sn over 50µ" (1,27µm) Ni

Operating Temp Range:
-55°C to +105°C with Tin;
-55°C to +125°C with Gold

RoHS Compliant:
Yes


Processing:

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0,20mm) .008" max (-DH)
(0,20mm) .008" max (-DV)

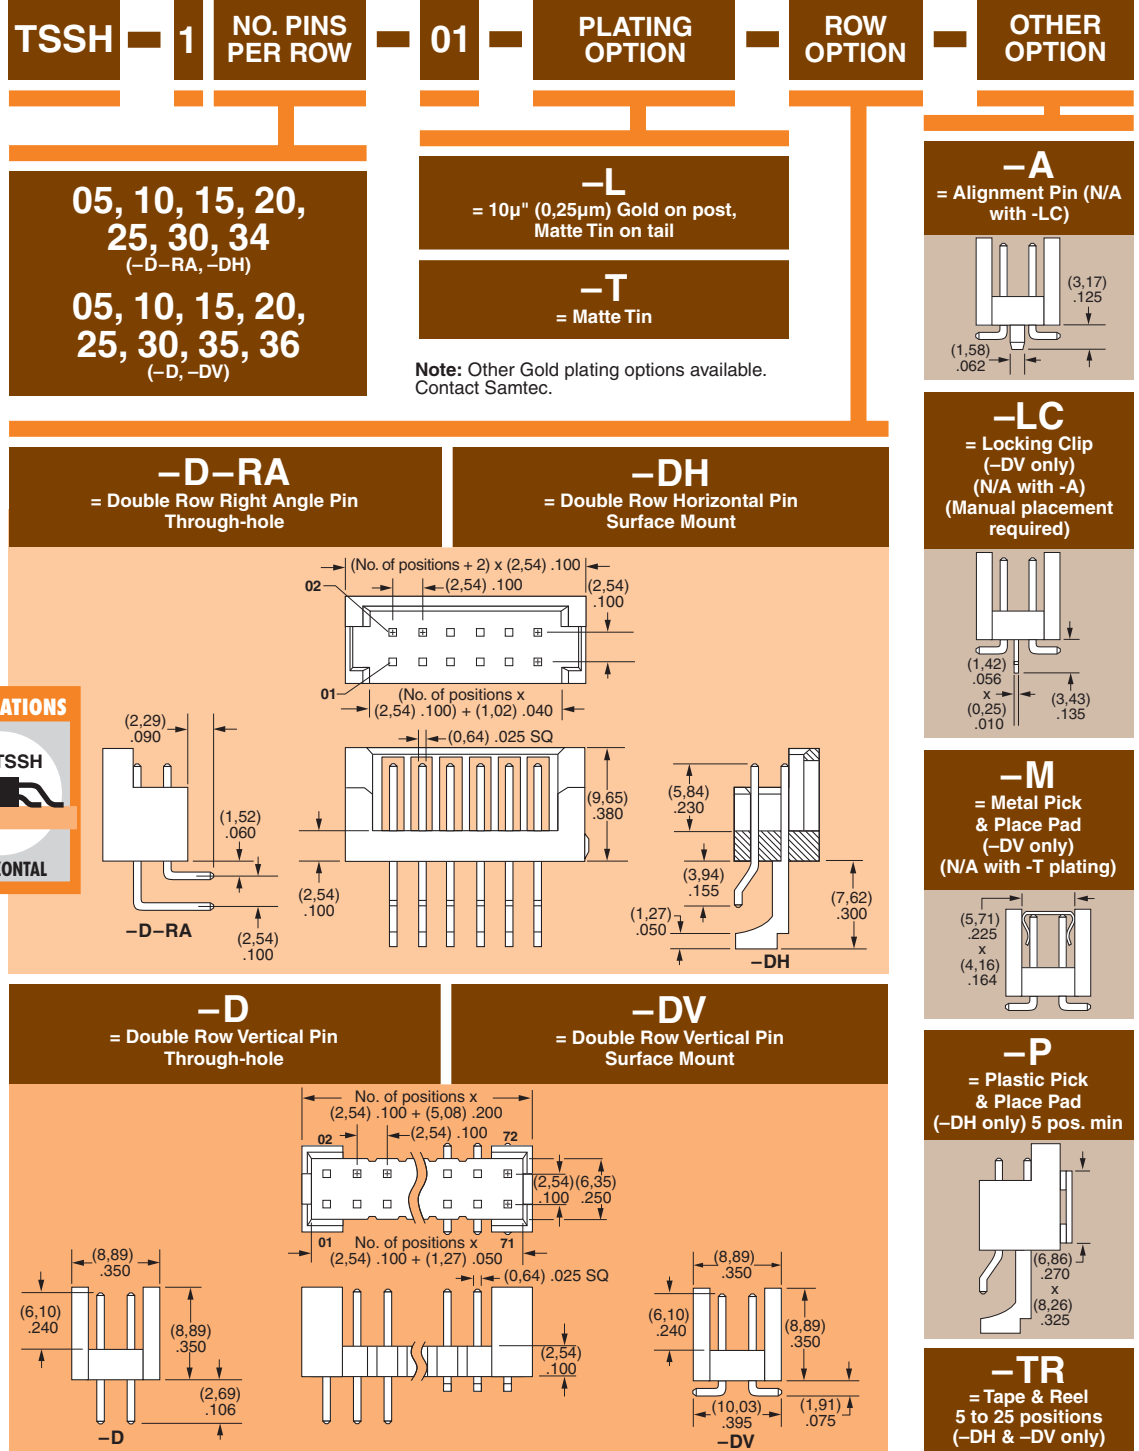

Note: Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM