


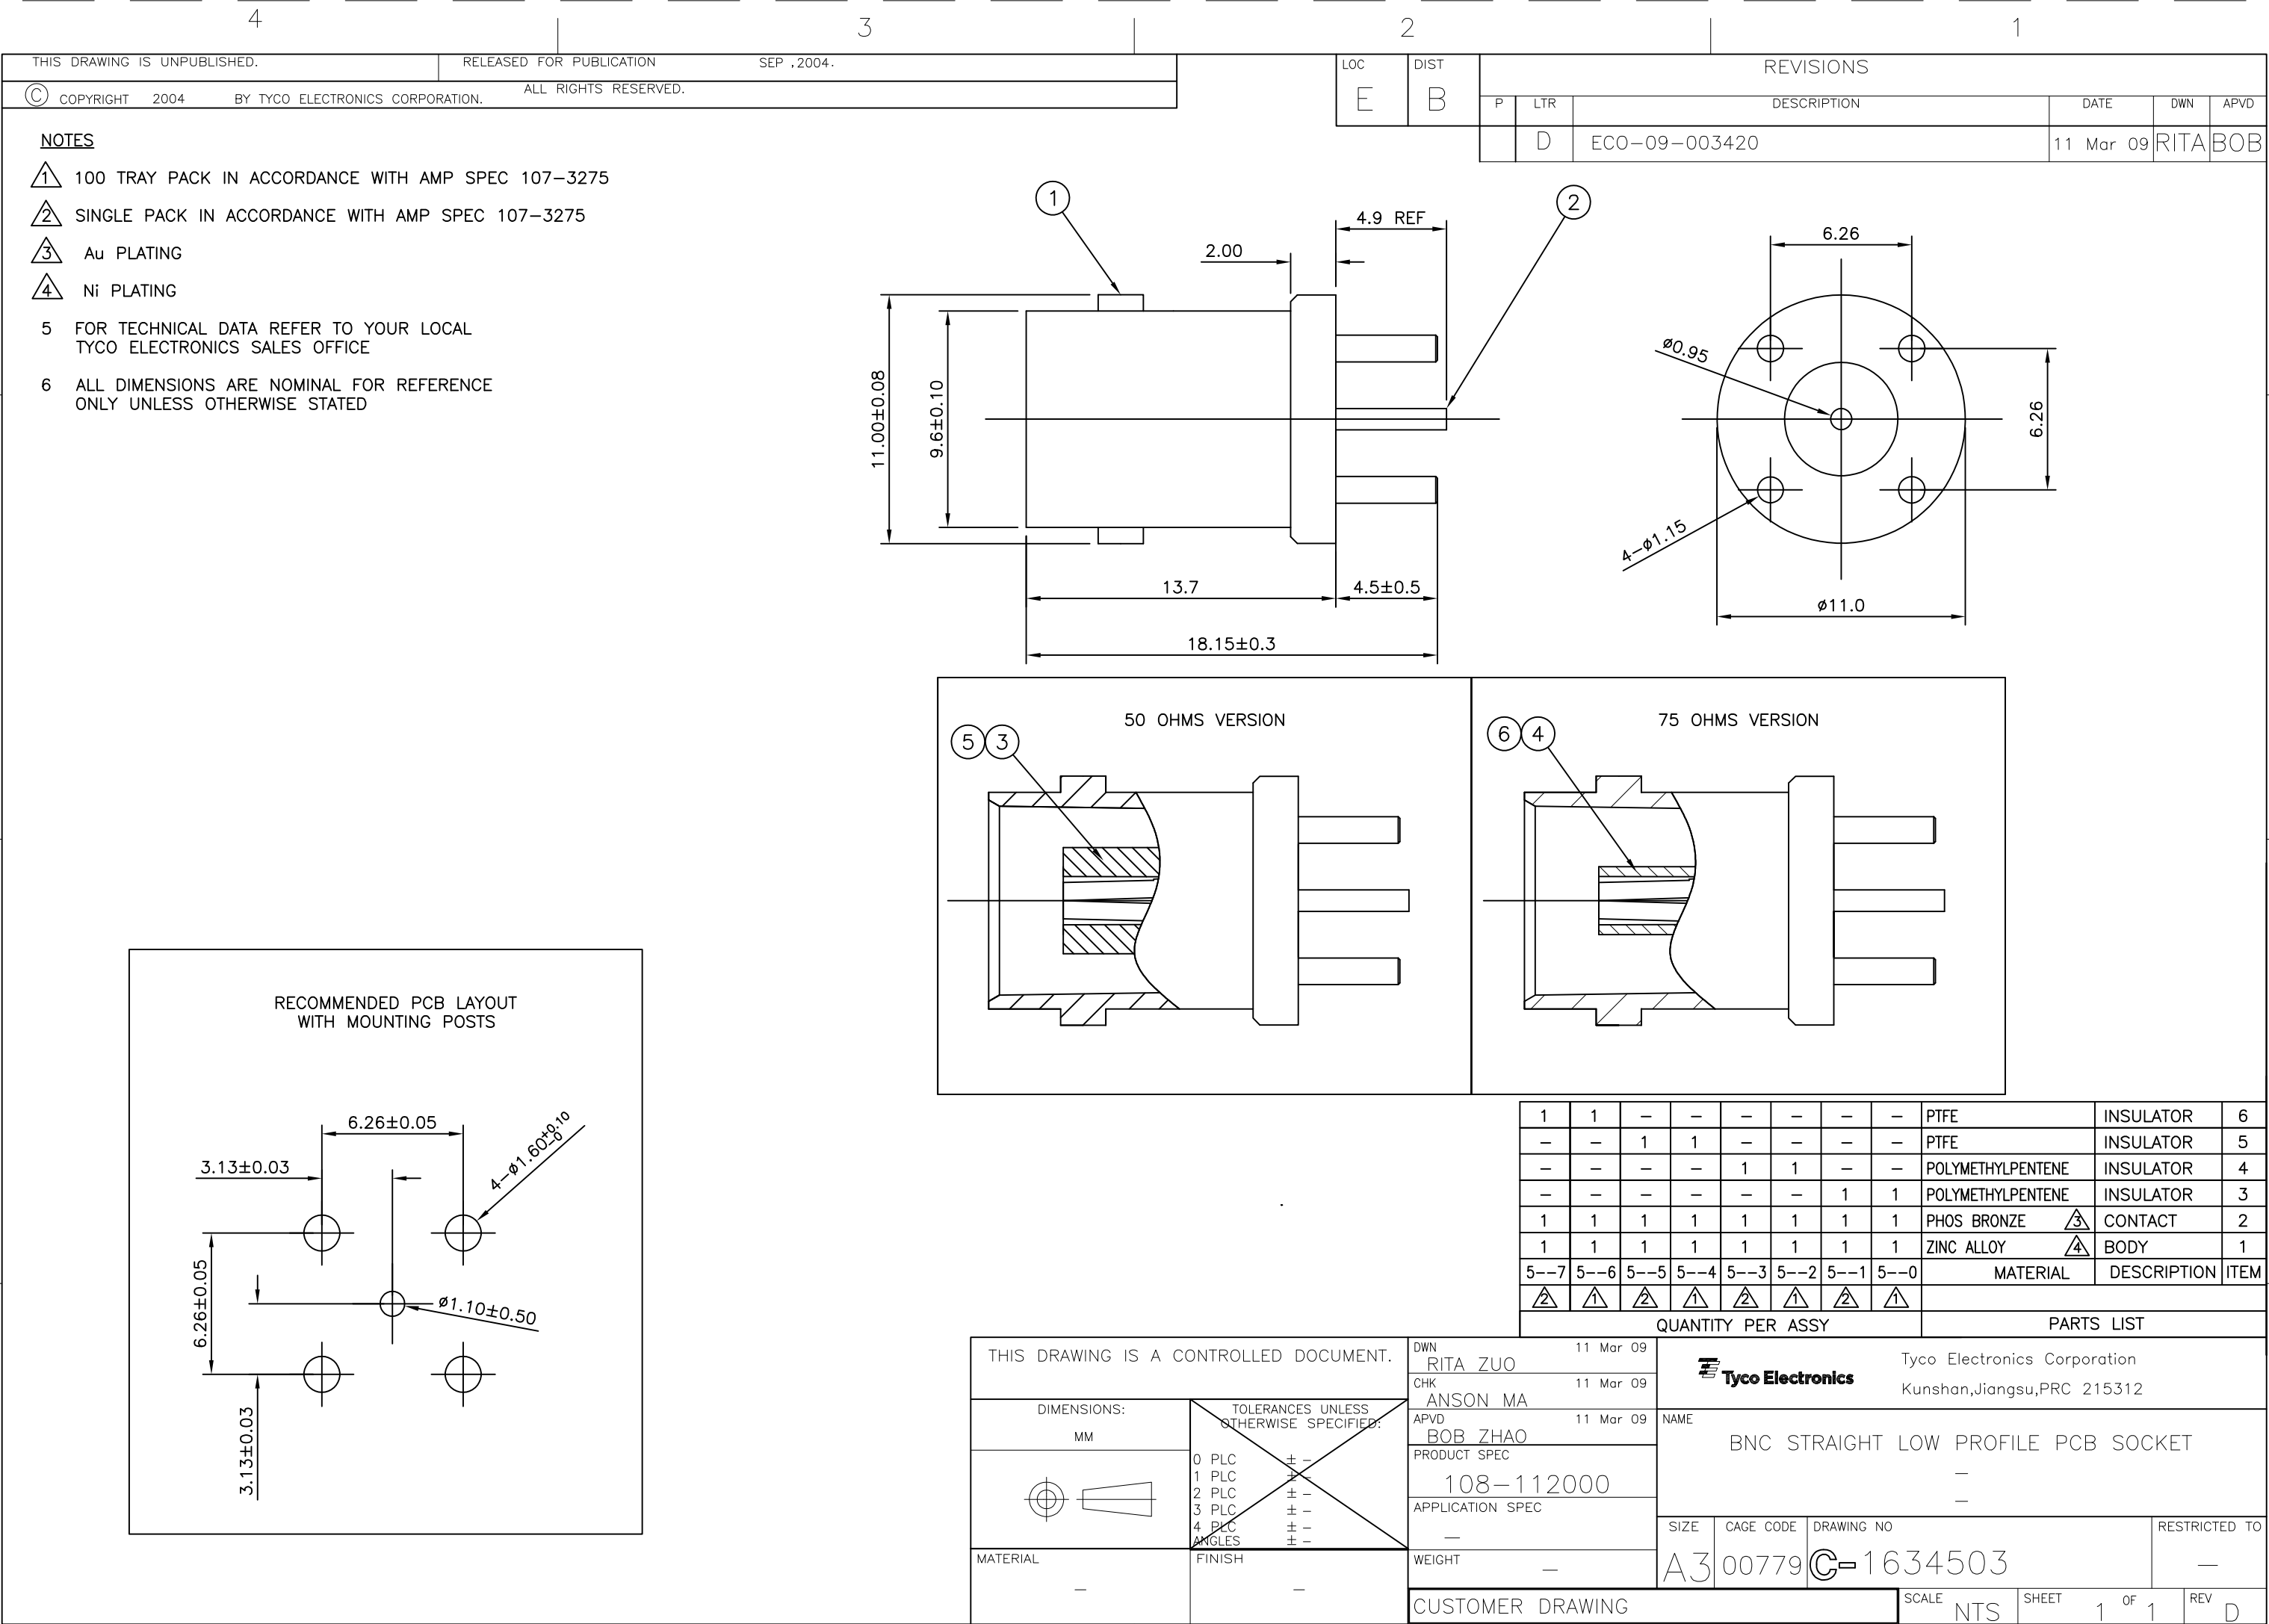

1

2.00

4.9 REF

2

11.00±0.08

9.6±0.10

13.7

4.5±0.5

18.15±0.3

6.26

6.26

4-φ1.15

φ0.95

φ11.0

50 OHMS VERSION

75 OHMS VERSION

RECOMMENDED PCB LAYOUT WITH MOUNTING POSTS

6.26±0.05

3.13±0.03

4-φ1.60±0.10

6.26±0.05

3.13±0.03

φ1.10±0.50

1	1	-	-	-	-	-	-	PTFE	INSULATOR	6
-	-	1	1	-	-	-	-	PTFE	INSULATOR	5
-	-	-	-	1	1	-	-	POLYMETHYLPENTENE	INSULATOR	4
-	-	-	-	-	-	1	1	POLYMETHYLPENTENE	INSULATOR	3
1	1	1	1	1	1	1	1	PHOS BRONZE	CONTACT	2
1	1	1	1	1	1	1	1	ZINC ALLOY	BODY	1
5--7	5--6	5--5	5--4	5--3	5--2	5--1	5--0	MATERIAL	DESCRIPTION	ITEM
△	△	△	△	△	△	△	△			
QUANTITY PER ASSY									PARTS LIST	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

MM

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

± -

± -

± -

± -

± -

± -

-

DWN

RITA ZUO

11 Mar 09

CHK

ANSON MA

11 Mar 09

APVD

BOB ZHAO

11 Mar 09

PRODUCT SPEC

108-112000

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

Tyco Electronics

Tyco Electronics Corporation

Kunshan,Jiangsu,PRC 215312

NAME

BNC STRAIGHT LOW PROFILE PCB SOCKET

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-1634503

-

SCALE

NTS

SHEET

1

OF

1

REV

D

AMP 1470-19 REV 31MAR2000