


DRAWING NOT TO SCALE
FOR REFERENCE ONLY

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

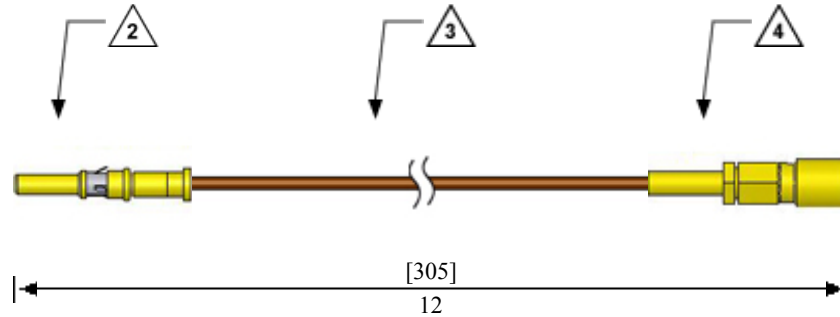

PATCHCORD
designer

- 6. Insertion Loss = -1.917 db max
- 5. Maximum Operating Frequency = 3 GHz
- 4. SMB PLUG
- 3. RG178BU TAN M17/93 (50 OHM, 3 GHZ)
- 2. 610141102 - MICRO COAXIAL, ITA, 3 GHZ

1. FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS MANUAL @ WWW.VPC.COM

NOTES:

DIMENSIONS ARE SHOWN AS
[MILLIMETERS]
INCHES

CUSTOMER DRAWING		
VIRGINIA PANEL CORPORATION WWW.VPC.COM		
Coaxial Patchcord, ITA, Micro Coaxial, 12", RG178BU Tan, to SMB Plug, (3 GHz)		
SIZE A	CAGE CODE 18117	PART# 7-363 178 550-012
SCALE: NONE	DATE: 02/26/2015	SHEET 1 OF 1