


Solid Tantalum Chip Capacitors Conformal Coated



FEATURES

- Eight standard case codes, "pad compatible" with MIL-PRF-55365/4 (CWR06).
- High volumetric efficiency (Up to 200,000 CV per cubic inch).
- Low profile, conformal-coated construction.
- 100 % low impedance power burn-in at + 85 °C.
- Low ESR in high frequency applications.
- Packaging in 50 unit 'Blister-Pack' trays or 8 mm or 12 mm tape and reel.
- Gold plated or solder dipped terminations.
- Type CC/EC capacitors are commercial equivalents of 49BC/EC.

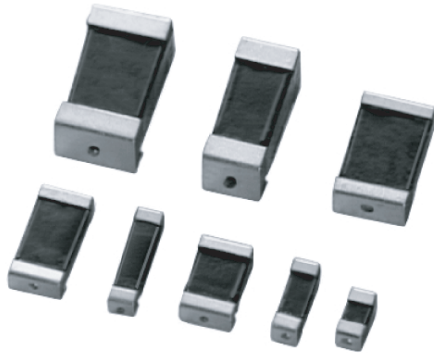


RoHS*
COMPLIANT

APPLICATIONS

- Medical
- Aerospace
- Military Hybrids

DIMENSIONS in inches [millimeters]

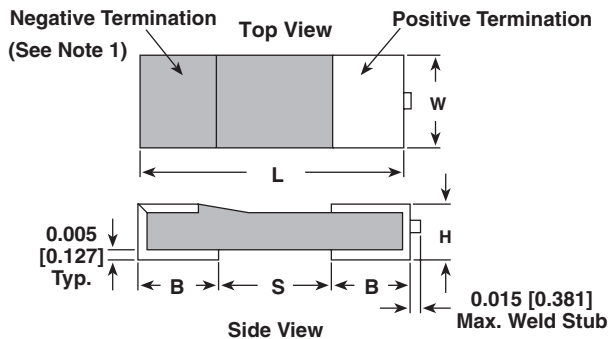

CASE CODE	LENGTH L	WIDTH W	HEIGHT H	SPACING TYPICAL S	PAD WIDTH B	TYPICAL WEIGHT (Grams)
A	0.100 ± 0.015 [2.54 ± 0.381]	0.050 ± 0.015 [1.27 ± 0.381]	0.050 ± 0.015 [1.27 ± 0.381]	0.040 [1.02]	0.030 ± 0.005 [0.76 ± 0.127]	0.02
B	0.150 ± 0.015 [3.81 ± 0.381]	0.050 ± 0.015 [1.27 ± 0.381]	0.050 ± 0.015 [1.27 ± 0.381]	0.090 [2.29]	0.030 ± 0.005 [0.76 ± 0.127]	0.03
C	0.200 ± 0.015 [5.08 ± 0.381]	0.050 ± 0.015 [1.27 ± 0.381]	0.050 ± 0.015 [1.27 ± 0.381]	0.140 [3.55]	0.030 ± 0.005 [0.76 ± 0.127]	0.04
D	0.150 ± 0.015 [3.81 ± 0.381]	0.100 ± 0.015 [2.54 ± 0.381]	0.050 ± 0.015 [1.27 ± 0.381]	0.090 [2.29]	0.030 ± 0.005 [0.76 ± 0.127]	0.07
E	0.200 ± 0.015 [5.08 ± 0.381]	0.100 ± 0.015 [2.54 ± 0.381]	0.050 ± 0.015 [1.27 ± 0.381]	0.140 [3.55]	0.030 ± 0.005 [0.76 ± 0.127]	0.09
F	0.220 ± 0.015 [5.59 ± 0.381]	0.135 ± 0.015 [3.43 ± 0.381]	0.070 ± 0.015 [1.78 ± 0.381]	0.160 [4.06]	0.030 ± 0.005 [0.76 ± 0.127]	0.21
G	0.265 ± 0.015 [6.73 ± 0.381]	0.110 ± 0.015 [2.79 ± 0.381]	0.110 ± 0.015 [2.79 ± 0.381]	0.165 [4.19]	0.050 ± 0.005 [1.27 ± 0.127]	0.33
H	0.285 ± 0.015 [7.25 ± 0.381]	0.150 ± 0.015 [3.81 ± 0.381]	0.110 ± 0.015 [2.79 ± 0.381]	0.185 [4.70]	0.050 ± 0.005 [1.27 ± 0.127]	0.50

Notes:

1. For polarity identification, when chip is in mounting position, bare metal clip and weld stub are positive. Top surface of the negative terminal is blue.
2. Anode Riser (weld stub) may extend case size length dimension by 0.015" [0.381] maximum.
3. Dimensions given are for gold plated terminations. For solder dipped terminations, add 0.015" [0.381] to dimension tolerances.
4. Spacing dimension is average distance between chip mounting terminations and therefore maximum distance between mounting pads on substrate..

* Pb containing terminations that are not RoHS compliant, exemptions may apply.



RATINGS AND CASE CODES																	
μF	Picofarad Code	4 V		6 V		10 V		15 V		20 V		25 V*		35 V*		50 V *	
		Std.	Ext.	Std.	Ext.	Std.	Ext.	Std.	Ext.	Std.	Ext.	Std.	Ext.	Std.	Ext.	Std.	Ext.
0.10	104	A	-	A	-	A	-	A	-	A	-	A	-	A	-	A	-
0.15	154	A	-	A	-	A	-	A	-	A	-	A	-	A	-	A	-
0.22	224	A	-	A	-	A	-	A	-	A	-	A	-	A	-	B	-
0.33	334	A	-	A	-	A	-	A	-	A	-	A	-	B	-	B	-
0.47	474	A	-	A	-	A	-	A	-	A	-	B	A	B	A	C	-
0.68	684	A	-	A	-	A	-	A	-	B	-	B	-	C	-	D	-
1.0	105	A	-	A	-	A	-	B	A	B	A	C	A	D	B	E	-
1.5	155	A	-	A	-	B	A	B	A	C	A	D	B	E	C	F	-
2.2	225	A	-	B	A	B	A	C	A	D	B	E	C	F	D	F	-
3.3	335	B	A	B	A	C	A	D	B	E	C	F	D	F	E	G	-
4.7	475	B	A	C	A	D	B	E	C	F	D	F	E	G	F	H	-
6.8	685	C	A	D	B	E	C	F	D	F	E	G	F	H	F	-	-
10	106	D	B	E	C	F	D	F	E	G	F	G	F	-	G	-	-
15	156	E	C	F	D	F	E	G	F	G	F	H	F	-	H	-	-
22	226	F	D	F	E	G	F	G	F	H	F	-	G	-	-	-	-
33	336	F	E	G	F	G	F	H	F	-	G	-	H	-	-	-	-
47	476	G	F	G	F	H	F	-	G	-	H	-	-	-	-	-	-
68	686	G	F	H	F	-	G	-	H	-	-	-	-	-	-	-	-
100	107	H	F	-	G	-	H	-	-	-	-	-	-	-	-	-	-
120	127	-	G	-	G	-	-	-	-	-	-	-	-	-	-	-	-
150	157	-	G	-	H	-	-	-	-	-	-	-	-	-	-	-	-
220	227	-	H	-	-	-	-	-	-	-	-	-	-	-	-	-	-

*Preliminary values, contact factory for availability.

STANDARD RATINGS - TYPE CC						
CAP (μF)	CASE CODE	25 °C DCL μA	85 °C DCL μA	125 °C DCL μA	DF (%)	ESR Ω
4 WVDC @ - 55 °C to + 85 °C, Surge = 5 V				2.7 WVDC @ + 125 °C, Surge = 3.4 V		
2.2	A	0.5	5.0	7.0	6.0	8.0
4.7	B	0.5	5.0	7.0	6.0	5.5
6.8	C	0.5	5.0	7.0	6.0	3.5
10	D	0.5	5.0	7.0	8.0	2.0
15	E	0.6	6.0	8.0	8.0	1.5
33	F	1.4	14.0	18.0	8.0	1.0
68	G	2.8	28.0	35.0	10.0	0.8
100	H	4.0	40.0	48.0	10.0	0.5
6 WVDC @ - 55 °C to + 85 °C, Surge = 8 V				4 WVDC @ + 125 °C, Surge = 5 V		
1.5	A	0.5	5.0	7.0	6.0	8.0
3.3	B	0.5	5.0	7.0	6.0	5.5
4.7	C	0.5	5.0	7.0	6.0	3.5
6.8	D	0.5	5.0	7.0	6.0	2.0
10	E	0.6	6.0	8.0	8.0	1.5
22	F	1.4	14.0	18.0	8.0	1.0
47	G	2.9	29.0	36.0	10.0	0.8
68	H	4.0	40.0	48.0	10.0	0.7
10 WVDC @ - 55 °C to + 85 °C, Surge = 13 V				7 WVDC @ + 125 °C, Surge = 9 V		
1.0	A	0.5	5.0	7.0	6.0	9.0
2.2	B	0.5	5.0	7.0	6.0	5.5
3.3	C	0.5	5.0	7.0	6.0	3.5
4.7	D	0.5	5.0	7.0	6.0	2.0
6.8	E	0.7	7.0	9.0	6.0	2.0
15	F	1.5	15.0	19.0	8.0	1.0
33	G	3.0	30.0	36.0	10.0	0.8
47	H	4.7	47.0	59.0	10.0	0.7



STANDARD RATINGS - TYPE CC						
CAP (μF)	CASE CODE	25 °C DCL μA	85 °C DCL μA	125 °C DCL μA	DF (%)	ESR Ω
15 WVDC @ - 55 °C to + 85 °C, Surge = 20 V			10 WVDC @ + 125 °C, Surge = 12 V			
0.68	A	0.5	5.0	7.0	6.0	10.0
1.5	B	0.5	5.0	7.0	6.0	6.0
2.2	C	0.5	5.0	7.0	6.0	4.0
3.3	D	0.5	5.0	7.0	6.0	2.5
4.7	E	0.8	8.0	10.0	6.0	2.5
10	F	1.5	15.0	19.0	6.0	1.5
22	G	3.3	33.0	42.0	8.0	1.0
33	H	5.0	50.0	60.0	8.0	0.8
20 WVDC @ - 55 °C to + 85 °C, Surge = 26 V			13 WVDC @ + 125 °C, Surge = 16 V			
0.47	A	0.5	5.0	7.0	6.0	12.0
0.68	B	0.5	5.0	7.0	6.0	8.0
1.0	B	0.5	5.0	7.0	6.0	8.0
1.5	C	0.5	5.0	7.0	6.0	6.0
2.2	D	0.5	5.0	7.0	6.0	3.5
3.3	E	0.7	7.0	9.0	6.0	3.0
6.8	F	1.4	14.0	18.0	6.0	2.5
15	G	3.0	30.0	36.0	6.0	1.0
22	H	4.0	40.0	48.0	6.0	1.0
25 WVDC @ - 55 °C to + 85 °C, Surge = 32 V			17 WVDC @ + 125 °C, Surge = 22 V			
0.33	A	0.5	5.0	7.0	6.0	15.0
0.68	B	0.5	5.0	7.0	6.0	10.0
1.0	C	0.5	5.0	7.0	6.0	6.5
1.5	D	0.5	5.0	7.0	6.0	5.0
2.2	E	0.6	6.0	8.0	6.0	3.5
4.7	F	1.2	12.0	15.0	6.0	2.5
6.8	G	1.7	17.0	22.0	6.0	1.2
10	G	2.5	25.0	32.0	6.0	1.4
15	H	3.8	38.0	48.0	6.0	1.0
35 WVDC @ - 55 °C to + 85 °C, Surge = 46 V			23 WVDC @ + 125 °C, Surge = 28 V			
0.22	A	0.5	5.0	7.0	6.0	18.0
0.47	B	0.5	5.0	7.0	6.0	12.0
0.68	C	0.5	5.0	7.0	6.0	9.0
1.0	D	0.5	5.0	7.0	6.0	6.0
1.5	E	0.6	6.0	8.0	6.0	4.5
3.3	F	1.0	10.0	12.0	6.0	2.5
4.7	G	1.7	17.0	22.0	6.0	1.5
6.8	H	2.4	24.0	30.0	6.0	1.3
50 WVDC @ - 55 °C to + 85 °C, Surge = 65 V			33 WVDC @ + 125 °C, Surge = 40 V			
0.10	A	0.5	5.0	7.0	6.0	20.0
0.15	A	0.5	5.0	7.0	6.0	20.0
0.22	B	0.5	5.0	7.0	6.0	15.0
0.33	B	0.5	5.0	7.0	6.0	12.0
0.47	C	0.5	5.0	7.0	6.0	8.0
0.68	D	0.5	5.0	7.0	6.0	7.0
1.0	E	0.5	5.0	7.0	6.0	6.0
1.5	F	0.8	8.0	10.0	6.0	4.0
2.2	F	1.1	11.0	14.0	6.0	2.5
3.3	G	1.7	17.0	22.0	6.0	2.0
4.7	H	2.4	24.0	30.0	6.0	2.0



STANDARD RATINGS - TYPE EC						
CAP (μ F)	CASE CODE	25 °C DCL μ A	85 °C DCL μ A	125 °C DCL μ A	DF (%)	ESR Ω
4 WVDC @ - 55 °C to + 85 °C, Surge = 5 V			2.7 WVDC @ + 125 °C, Surge = 3.4 V			
6.8	A	0.5	5.0	6.0	6.0	3.5
10	B	0.5	5.0	6.0	8.0	2.0
15	C	0.6	6.0	8.0	8.0	1.5
22	D	0.9	9.0	11.0	8.0	1.0
33	E	1.4	14.0	17.0	8.0	1.0
100	F	4.0	40.0	48.0	10.0	0.5
150	G	6.0	60.0	72.0	10.0	0.5
220	H	9.0	90.0	108.0	10.0	0.5
6 WVDC @ - 55 °C to + 85 °C, Surge = 8 V			4 WVDC @ + 125 °C, Surge = 5 V			
4.7	A	0.5	5.0	6.0	6.0	3.5
6.8	B	0.5	5.0	6.0	6.0	2.0
10	C	0.6	6.0	8.0	8.0	1.5
15	D	0.9	9.0	11.0	8.0	1.0
22	E	1.4	14.0	17.0	8.0	1.0
68	F	4.0	40.0	48.0	10.0	0.7
120	G	8.0	80.0	96.0	10.0	0.5
150	H	9.0	90.0	108.0	10.0	0.5
10 WVDC @ - 55 °C to + 85 °C, Surge = 13 V			7 WVDC @ + 125 °C, Surge = 9 V			
3.3	A	0.5	5.0	6.0	6.0	3.5
4.7	B	0.5	5.0	6.0	6.0	2.0
6.8	C	0.7	7.0	9.0	6.0	2.0
10	D	1.0	10.0	12.0	8.0	1.5
15	E	1.5	15.0	18.0	8.0	1.0
47	F	4.7	47.0	57.0	10.0	0.7
68	G	7.0	70.0	84.0	10.0	0.7
100	H	10.0	100.0	120.0	10.0	0.5
15 WVDC @ - 55 °C to + 85 °C, Surge = 20 V			10 WVDC @ + 125 °C, Surge = 12 V			
2.2	A	0.5	5.0	6.0	6.0	4.0
3.3	B	0.5	5.0	6.0	6.0	2.5
4.7	C	0.8	8.0	10.0	6.0	2.5
6.8	D	1.0	10.0	12.0	6.0	2.0
10	E	1.5	15.0	18.0	6.0	1.5
33	F	5.0	50.0	60.0	8.0	0.8
47	G	8.0	80.0	96.0	8.0	0.8
68	H	11.0	110.0	132.0	8.0	0.8
20 WVDC @ - 55 °C to + 85 °C, Surge = 26 V			13 WVDC @ + 125 °C, Surge = 16 V			
1.5	A	0.5	5.0	6.0	6.0	6.0
2.2	B	0.5	5.0	6.0	6.0	3.5
3.3	C	0.7	7.0	9.0	6.0	3.0
4.7	D	1.0	10.0	12.0	6.0	2.5
6.8	E	1.4	14.0	17.0	6.0	2.0
22	F	4.0	40.0	48.0	6.0	1.0
33	G	7.0	70.0	84.0	6.0	1.0
47	H	10.0	100.0	120.0	6.0	1.0



STANDARD RATINGS - TYPE EC						
CAP (μF)	CASE CODE	25 °C DCL μA	85 °C DCL μA	125 °C DCL μA	DF (%)	ESR Ω
*25 WVDC @ - 55 °C to + 85 °C, Surge = 32 V			17 WVDC @ + 125 °C, Surge = 22 V			
1.0	A	0.5	5.0	6.0	6.0	8.0
1.5	B	0.5	5.0	6.0	6.0	5.0
2.2	C	0.6	6.0	8.0	6.0	3.5
3.3	D	0.9	9.0	11.0	6.0	3.5
4.7	E	1.2	12.0	15.0	6.0	2.5
10	F	2.5	25.0	30.0	6.0	2.0
15	F	3.8	38.0	46.0	6.0	1.0
22	G	6.0	60.0	72.0	6.0	1.0
33	H	9.0	90.0	108.0	6.0	1.0
*35 WVDC @ - 55 °C to + 85 °C, Surge = 46 V			23 WVDC @ + 125 °C, Surge = 28 V			
0.47	A	0.5	5.0	6.0	6.0	12.0
1.0	B	0.5	5.0	6.0	6.0	6.0
1.5	C	0.6	6.0	8.0	6.0	5.0
2.2	D	0.8	8.0	10.0	6.0	3.5
3.3	E	1.0	10.0	12.0	6.0	2.5
4.7	F	1.7	17.0	20.0	6.0	2.5
6.8	F	2.4	24.0	29.0	6.0	2.0
10	G	4.0	40.0	48.0	6.0	2.0
15	H	6.0	60.0	72.0	6.0	2.0

*Preliminary values, contact factory for availability

ORDERING INFORMATION						
CC	685	H	035	K	X	S
SERIES	CAPACITANCE	CASE CODE	RATED VOLTAGE AT 85 °C	CAPACITANCE TOLERANCE	GRADE	TERMINATION FINISH
CC = Standard Range. EC = Extended Range.	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.	See Table.		J = ± 5 % K = ± 10 % M = ± 20 %	A = Industrial grade. X = Requires internal spec.	G = Gold plated. S = Solder dipped
Example: CC685H035KXS						



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.