
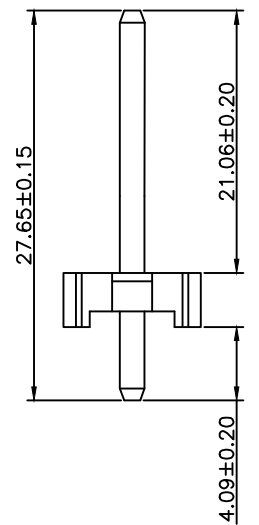
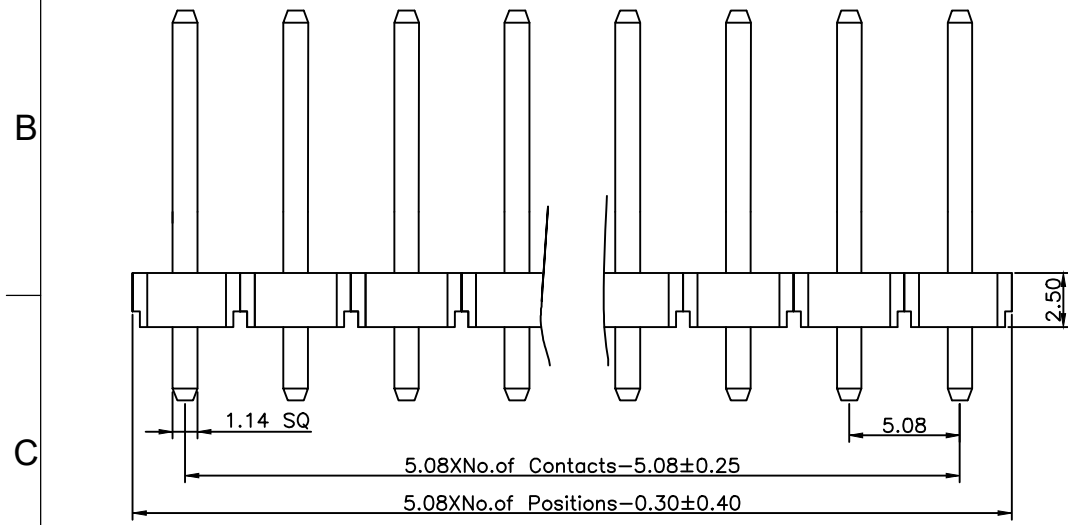


1 2 3 4 5 6 7 8

| | | |
|------|-----|-------------------------|
| Mark | Qty | Engineering Change Area |
| | | |

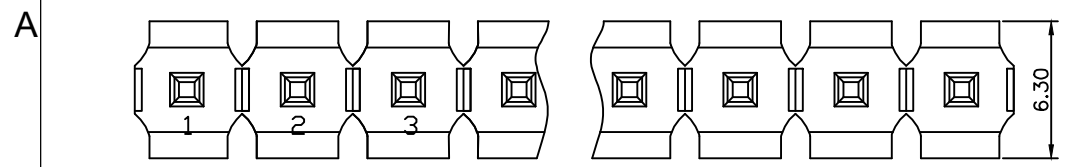

NOTE:
 1.Specification:
 1.1:Current Rating :7A
 1.2:Contact Resistance:20mΩ MAX.
 1.3:Insulation Resistance :1000MΩ MIN.
 1.4:Dielectric Withstanding Voltage:500V/minute
 1.5:Operating Temperature:-40℃~+105℃
 2.Material:
 2.1:Insulators:LCP,UL94V-0,BLACK
 2.2:Contacts:Brass,Tin Plated over Nickel

Part No.
 21 19 1 XX 9 9 25 4 0
 a

a:Products pole
 02Pole~40Pole

*** UNLESS OTHERWISE SPECIFIED TOLERANCES ON DECIMAL IS:**

| | | | |
|-------|--------|----|------|
| X. | ± 0.38 | X° | ± 2° |
| X.X | ± 0.25 | | |
| X.XX | ± 0.15 | | |
| X.XXX | ± 0.10 | | |

| | | | | | | |
|--------------------------|---------------|-----------|---------------|---------------|-------|--|
| All dimensions are in mm | | | Material: | | | |
| | | | Finishing: | | | |
| Created by | Signature | Date | Phase Marking | Weight | Scale | 威士连接技术(中山)有限公司 WASS Contact (Zhongshan)Co.,Ltd. |
| | Ivy Bao | 2020.9.13 | | | 1:1 | |
| Checked by | Ivy Bao | 2020.9.13 | P/N | 21191XX992540 | | Part Name: Single Row M 5.08mm Str Header |
| Approved by | Yant Yang | 2020.9.13 | MD/CD | | | Rev. 01 |
| State | First Release | | | | | Page: 1 OF 1 |

1 2 3 4 5 6 7 8