





Panhovede skruer med krydskærv, for (Pozidriv)

Pozidriv cross recessed Pan head machine screws

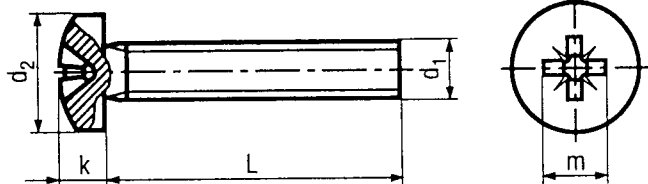

DIN 7985 A **4.8** 
 ~ISO 7045
Form Z

HFC 9041 = BN 3334
HFC 9043 = BN 30502

BN 3334  FZB/zinc plated
BN 30502  SZ/zinc plated black

Pakkestørrelser / Packages

IP industripakke / industry packages

Alle længder med gevind til hoved

All lengths fully threaded

Materiale: **stål / steel**
 Material:

Flydespænding: 320 N/mm²
 Yield strength:

Kvalitetsklasse: **4.8**
Property class:









Brudforlængelse: min. 14%
 Elongation after fracture:

Brudstyrke: 400 N/mm²
 Tensile strength:


d1	M2	M2,5	M3	M4	M5	M6
d2 max.	4	5	6	8	10	12
k max.	1,72	2,12	2,52	3,25	3,95	4,75
krydskærv	m-	2,4	2,6	3	4,3	6,7
	Pozidriv nr. Driver size	1	1	1	2	2
	nedskr./depth min.	1,1	1,27	1,68	1,9	2,64
	dybde max.	1,35	1,52	1,93	2,36	3,1
Prøvelast N Proof load N	600	990	1560	2720	4400	6230

DIN 7985 med Phillips kær, se siderne 5.030–5.031

DIN 7985 Phillips cross recess see pages 5.030–5.031

d1	M2		M2,5		M3		(M3,5)	
	 BN 3334 HFC 9041	 BN 3334 HFC 9041	 BN 30502 HFC 9043	 BN 3334 HFC 9041	 BN 30502 HFC 9043	 BN 3334 HFC 9041		
L	3	•	•	•	•	•	•	•
	4	•	•	•	•	•	•	•
	5	•	•	•	•	•	•	•
	6	•	•	•	•	•	•	•
	8	•	•	•	•	•	•	•
	10	•	•	•	•	•	•	•
	12	•	•	•	•	•	•	•
	(14)	•	•	•	•	•	•	•
	16	•	•	•	•	•	•	•
	(18)	•	•	•	•	•	•	•
	20	•	•	•	•	•	•	•
	(22)	•	•	•	•	•	•	•
25	•	•	•	•	•	•	•	
30	•	•	•	•	•	•	•	
35	•	•	•	•	•	•	•	
40	•	•	•	•	•	•	•	
45	•	•	•	•	•	•	•	
50	•	•	•	•	•	•	•	
(55)	•	•	•	•	•	•	•	

BN 30502 SZ/zinc plated black

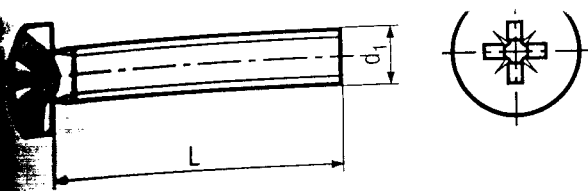

Pakkestørrelser / Packages

IP industripakke / industry packages

Alle længder med gevind til hoved
All lengths fully threaded

d1	M4				M5				M6				
	BN 3334 HFC 9041		BN 30502 HFC 9043		BN 3334 HFC 9041		BN 30502 HFC 9043		BN 3334 HFC 9041		BN 30502 HFC 9043		
L	4	•	•										
	5	•	•										
	6	•	•	•	•	•	•			•	•		
	8	•	•	•	•	•	•	•	•	•	•	•	•
	10	•	•	•	•	•	•	•	•	•	•	•	•
	12	•	•	•	•	•	•	•	•	•	•	•	•
	(14)	•	•			•	•			•	•	•	•
	16	•	•			•	•			•	•	•	•
	18	•	•	•	•					•	•		
	20	•	•			•	•			•	•		
	22	•	•							•	•		
	25	•	•			•	•			•	•		
	30	•	•			•	•			•	•		
	35	•	•			•	•			•	•		
	40	•	•			•	•			•	•		
45	•	•			•	•			•	•			
50	•	•			•	•			•	•			
55	•	•			•	•			•	•			
60	•	•			•	•			•	•			
70	•	•			•	•			•	•			
80	•	•			•	•			•	•			
100	•	•			•	•			•	•			
	100/200	IP	1000	IP	100/200	IP	1000	IP	100/200	IP	500/1000	IP	

d1		M8	
		BN 3334 HFC 9041	
L	16	•	•
	20	•	•
	25	•	•
	30	•	•
	40	•	•
	50	•	•
	100	IP	

• fra lager / available from stock