


Zubehör

Zwilling-Aderendhülsen mit Kunststoffkragen

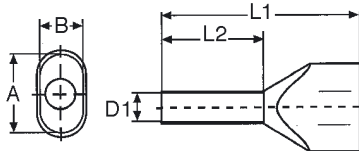


		Leiter-Nennquerschnitt		Maße (mm)				Abisolierlänge	
		(mm ²)	AWG	L 1	L 2	D 1	A/B	mm	VPE
0,5		0,5	20	15	8	1,4	5/3	11	500
		0,5	20	16	10	1,4	5/3	13	500
		0,5	20	19	12	1,4	5/3	15	500
0,75		0,75	18	15	8	1,7	5,5/3	11	500
		0,75	18	17	10	1,7	5,5/3	13	500
		0,75	18	24	18	1,7	5,5/3	21	500
1		1,0	17	16	8	2,2	6,5/3,6	12	500
		1,0	17	15	8	2,0	5,8/3,2	12	500
		1,0	17	19	12	2,0	5,8/3,2	16	500
		1,0	17	25	18	2,0	5,8/3,2	22	500
1,5		1,5	16	16	8	2,2	6,5/3,6	11	500
		1,5	16	20	12	2,2	6,5/3,6	15	500
		1,5	16	26	18	2,2	6,5/3,6	21	500
2,5		2,5	14	19	10	2,8	8/4,5	13	500
		2,5	14	19	10	2,8	8/4,5	13	250
		2,5	14	21	12	2,8	8/4,5	15	500
		2,5	14	21	12	2,8	8/4,5	15	250
		2,5	14	27	18	2,8	8/4,5	21	500
4		4,0	12	22	12	3,5	9/5,2	15	100
		4,0	12	28	18	3,5	9/5,2	21	100
6		6,0	10	25	12	4,5	11,4/6,2	20	100
		6,0	10	29	18	4,5	11,4/6,2	24	100
10		10,0	7	24	12	5,8	13,4/7,6	17	100
		10,0	7	30	18	5,8	13,4/7,6	23	100
		10,0	7	24	12	6,5	13,4/7,6	17	100
		10,0	7	30	18	6,5	13,4/7,6	23	100
16		16,0	6	29	16	8,3	17,2/9,5	20	50
		16,0	6	38	25	8,3	17,2/9,5	29	50

Weidmüller-Standard

Typ	Farbe	Best.-Nr.	Mehrfach-
			beutel
			Best.-Nr.
H 0,5/15	orange	9037200000	9004440000*
H 0,5/16,5	orange	9037210000	
H 0,5/18,5	orange	9037220000	
H 0,75/15	weiß	9037230000	9018510000*
H 0,75/17	weiß	9037240000	9004900000*
H 0,75/24,5	weiß	9037250000	
H 1/15S	gelb	9018690000	9018650000*
H 1/15	gelb	9037260000	9018530000*
H 1/20	gelb	9037270000	9004910000*
H 1/25,6	gelb	9037280000	
H 1,5/16	rot	9037290000	9004410000*
H 1,5/20	rot	9037300000	9004920000*
H 1,5/25,6	rot	9037310000	
H 2,5/18,5D	blau	9037500000	
H 2,5/18,5D	blau		9004430000**
H 2,5/20,5D	blau	9037510000	
H 2,5/20,5D	blau		9004740000**
H 2,5/26,5D	blau	9037520000	
H 4/22D	grau	9037530000	9004730000***
H 4/28D	grau	9037540000	
H 6/25	schwarz	9037320000	9004930000***
H 6/29	schwarz	9037330000	
H 10/26	elfenbein	9037340000	9004940000***
H 10/30	elfenbein	9037350000	
H 10/24 S	elfenbein	9018860000	
H 10/30 S	elfenbein	9018870000	
H 16/29	grün	9037360000	
H 16/38	grün	9037370000	

* 5 x 100 ** 5 x 50 *** 5 x 20

Aderendhülsen für kurz- und erdschlußsichere Leitungen



		Leiter-Nennquerschnitt		Maße (mm)				Abisolierlänge	
		(mm ²)	AWG	L 1	L 2	D 1	D 2	mm	VPE
1,5		1,5	16	17,5	8	1,8	6,8	13	100
		1,5	16	19,5	10	1,8	6,8	15	100
2,5		2,5	14	17,5	8	2,3	7,6	14	100
		2,5	14	21,5	12	2,3	7,6	17	100
4		4	12	19,5	10	2,9	7,8	14	100
6		6	10	23	12	3,6	8,1	17	100
10		10	7	24	12	4,6	9,6	17	100
16		16	6	25,5	12	6	11,9	26	100

Typ	Farbe	Best.-Nr.	Mehrfach-
			beutel
			Best.-Nr.
H 1,5/17,5XS	schwarz	9006590000	
H 1,5/19,5XS	schwarz	9006630000	
H 2,5/17,5XS	blau	9006670000	
H 2,5/21,5XS	blau	9006710000	
H 4/19,5XS	grau	9006750000	
H 6/23XS	gelb	9006790000	
H 10/24,5XS	rot	9006830000	
H 16/25,5XS	blau	9006870000	

DIN


Typ	Farbe	Best.-Nr.	Mehrfach- beutel Best.-Nr.
H 0,5/15D	weiß	9037380000	9004780000*
H 0,5/16,5D	weiß	9037390000	
H 0,5/18,4D	weiß	9037400000	
H 0,75/15D	grau	9037410000	9018520000*
H 0,75/17D	grau	9037420000	9004770000*
H 0,75/24,5D	grau	9037430000	
H 1/15D	rot	9037440000	9018540000*
H 1/20D	rot	9037450000	9004760000*
H 1/25,6D	rot	9037460000	
H 1,5/16D	schwarz	9037470000	9004420000*
H 1,5/20D	schwarz	9037480000	9004750000*
H 1,5/25,6D	schwarz	9037490000	
H 2,5/18,5D	blau	9037500000	
H 2,5/18,5D	blau		9004430000**
H 2,5/20,5D	blau	9037510000	
H 2,5/20,5D	blau		9004740000**
H 2,5/26,5D	blau	9037520000	
H 4/22D	grau	9037530000	9004730000***
H 4/28D	grau	9037540000	
H 6/25D	gelb	9037550000	9004720000***
H 6/29D	gelb	9037560000	
H 10/26D	rot	9037570000	9004710000***
H 10/30D	rot	9037580000	
H 10/24 DS	rot	9018880000	
H 10/30 DS	rot	9018890000	
H 16/29D	blau	9037590000	
H 16/38D	blau	9037600000	

Sonstige

Typ	Farbe	Best.-Nr.	Mehrfach- beutel Best.-Nr.
H 0,5/15	orange	9037200000	
H 0,5/16,5	orange	9037210000	
H 0,5/18,5	orange	9037220000	
H 0,75/15T	hellblau	9037610000	9018570000*
H 0,75/17T	hellblau	9037620000	9005140000*
H 0,75/24,5T	hellblau	9037630000	
H 1/15D	rot	9037440000	9018540000*
H 1/20D	rot	9037450000	9004760000*
H 1/25,6D	rot	9037460000	
H 1,5/16D	schwarz	9037470000	9004420000*
H 1,5/20D	schwarz	9037480000	9004750000*
H 1,5/25,6D	schwarz	9037490000	
H 2,5/18,5T	grau	9037640000	
H 2,5/18,5T	grau		9018580000**
H 2,5/20,5T	grau	9037650000	
H 2,5/20,5T	grau		9005150000**
H 2,5/26,5T	grau	9037660000	
H 4/22T	orange	9037670000	9018590000***
H 4/28T	orange	9037680000	
H 6/25T	grün	9037690000	9005160000***
H 6/29T	grün	9037700000	
H 10/26T	braun	9037710000	9005170000***
H 10/30T	braun	9037720000	
H 16/29T	weiß	9037730000	
H 16/38T	weiß	9037740000	

* 5 x 100 ** 5 x 50 *** 5 x 20

Aderendhülsen mit Kunststoffkragen Sondergrößen




	Leiter-Nenn- querschnitt (mm ²)	AWG	Maße (mm)				Abisolier- länge mm	VPE	Typ	Farbe	Best.-Nr.	Mehrfach- beutel Best.-Nr.
			L 1	L 2	D 1	D 2						
0,5	0,5	20	14	8	1	2,9	10	500	H 0,5/14 S	orange	9004560000	
	0,5	20	14	8	1	2,9	10	500	H 0,5/14 DS	weiß	9004590000	
0,75	0,75	18	14	8	1,2	3,4	10	500	H 0,75/14 S	weiß	9025960000	9025700000*
	0,75	18	14	8	1,2	3,4	10	500	H 0,75/14 TS	hellblau	9018550000	
1	1	17	14	8	1,4	3,5	10	500	H 1/14 S	gelb	9025970000	9025710000*
	1	17	14	8	1,4	3,5	10	500	H 1/14 DS	rot	9018560000	
1,5	1,5	16	12	6	1,7	3,5	8	500	H 1,5/12 S	rot	9025690000	
	1,5	16	14	8	1,7	3,9	10	500	H 1,5/14 S	rot	9025980000	9025720000*
	1,5	16	14	8	1,7	3,9	10	500	H 1,5/14 DS	schwarz	9025240000	9028360000*
2,5	2,5	14	12	6	2,2	4,2	8	500	H 2,5/12 DS	blau	9028490000	
	2,5	14	14	8	2,2	4	10	500	H 2,5/14 DS	blau	1333100000	
	2,5	14	16	10	2,2	4,2	13	500	H 2,5/16 DS	blau	9036220000	
	2,5	12	12	6	2,2	4,2	8	500	H 2,5/12 TS	grau	9036200000	
	2,5	14	14	8	2,2	4,2	10	500	H 2,5/14 TS	grau	9426770000	
2,5	14	16	10	2,2	4,2	13	500	H 2,5/16 TS	grau	9036210000		
4,0	4,0	12	14	8	2,8	4,8	10	500	H 4,0/14 DS	grau	9028520000	
	4,0	12	15	8	2,8	4,8	12	500	H 4,0/15 TS	orange	9036230000	

* 5 x 100 Stück


Zubehör

Aderendhülsen ohne Kunststoffkragen



	Leiter-Nennquerschnitt (mm ²)	AWG	Maße (mm)			Abisolierlänge		Typ	Best.-Nr.
			L 1	D 1	D 2	mm	VPE		
0,25	0,25	24	5	0,7	1,65	5	1000	H 0.25/5	9018910000
0,5	0,5	20	6	1	2,1	6	1000	H 0.5/6	0282600000
	0,5	20	10	1	2,1	10	1000	H 0.5/10	9004050000
0,75	0,75	18	6	1,2	2,3	6	1000	H 0.75/6	0282700000
	0,75	18	10	1,2	2,3	10	1000	H 0.75/10	0542500000
1	1	17	6	1,4	2,5	6	1000	H 1/6	0372600000
	1	17	10	1,4	2,5	10	1000	H 1/10	0282800000
1,5	1,5	16	7	1,7	2,8	7	1000	H 1.5/7	0372700000
	1,5	16	10	1,7	2,8	10	1000	H 1.5/10	0186500000
	1,5	16	12	1,7	2,8	12	1000	H 1.5/12	9004060000
	1,5	16	18	1,7	2,8	18	1000	H 1.5/18	9004070000
2,5	2,5	14	7	2,2	3,4	7	1000	H 2.5/7	0373000000
	2,5	14	10	2,2	3,4	10	1000	H 2.5/10	9004080000
	2,5	14	12	2,2	3,4	12	1000	H 2.5/12	0186100000
	2,5	14	18	2,2	3,4	18	1000	H 2.5/18	9004090000
4	4	12	9	2,8	4	9	500	H 4/9	0373100000
	4	12	12	2,8	4	12	1000	H 4/12	0244100000
	4	12	15	2,8	4	15	1000	H 4/15	9004100000
	4	12	18	2,8	4	18	1000	H 4/18	9004110000
6	6	10	10	3,5	4,7	10	500	H 6/10	9004120000
	6	10	12	3,5	4,7	12	500	H 6/12	0191900000
	6	10	15	3,5	4,7	15	500	H 6/15	0124700000
	6	10	18	3,5	4,7	18	500	H 6/18	9004130000
10	10	7	12	4,5	5,8	12	500	H 10/12	0282900000
	10	7	15	4,5	5,8	15	500	H 10/15	0124800000
	10	7	18	4,5	5,8	18	500	H 10/18	0379300000
16	16	6	12	5,8	7,5	12	500	H 16/12	0492500000
	16	6	15	5,8	7,5	15	500	H 16/15	0124300000
	16	6	18	5,8	7,5	18	100	H 16/18	0375200000
	16	6	25	5,8	7,5	25	100	H 16/25	9004150000
	16	6	32	5,8	7,5	32	100	H 16/32	9004160000
25	25	3	15	7,3	9,5	15	250	H 25/15	0124400000
	25	3	18	7,3	9,5	18	100	H 25/18	0375300000
	25	3	25	7,3	9,5	25	100	H 25/25	9004170000
	25	3	32	7,3	9,5	32	100	H 25/32	9004180000
35	35	2	18	8,3	11	18	100	H 35/18	0368900000
	35	2	25	8,3	11	25	100	H 35/25	9004190000
	35	2	30	8,3	11	30	500	H 35/30 S	9451000000
	35	2	32	8,3	11	32	100	H 35/32	9004200000
50 ...	50	1	18	10,3	13	18	100	H 50/18	9004210000
	50	1	25	10,3	13	25	100	H 50/25	9025880000
	50	1	32	10,3	13	32	100	H 50/32	9004220000
	70	2/0	25	12,5	15	25	50	H 70/25	9004230000
	70	2/0	32	12,5	15	32	50	H 70/32	9004240000
	95	3/0	25	14,5	17	25	50	H 95/25	9004250000
	95	3/0	32	14,5	17	32	50	H 95/32	9004260000
	120	4/0	32	16,5	19	32	50	H 120/32	9036240000
	150	300 MCM	32	18,5	21	32	50	H 150/32	9036250000
	185	350 MCM	32	20	23,5	32	50	H 185/32	9036260000

Hakenförmige Kabelschuhe nach ESI 50-18 Teil 2



Leiter-Nennquerschnitt (mm ²)		AWG	Maße (mm)			VPE	Typ	Best.-Nr.
(mm ²)			L 1	L 2	B			
0,25...1,5	24		27,2	16,75	4,6	2	HB 1-17	9036290000
1,0...2,5	24		27,2	16,75	3,0	2	HB 1-13	9036300000