



**Part Number :** [459704115](#)


**Product Description :** 1.27mm Pitch, SEARAY Plug, 400 Circuits, 2.00mm Unmated Height, 10 Rows, with Pegs, Solder Charge Lead-Free

**Series Number :** 45970

**Status :** Active

**Product Category :** Board-to-Board Connectors

---

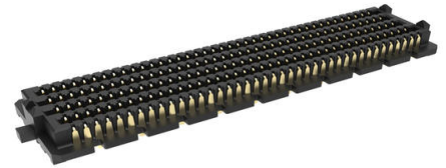

## Documents and Resources

### Drawings

[459704115 sd.pdf](#)

[PK-45970-002-001.pdf](#)

### 3D Models and Design Files

[STEP AP242](#)

[SOLIDWORKS](#)

[Creo](#)

[SYM-45970-4115-001.zip](#)

[EE-45970-007-007.pdf](#)

[EE-45970-010-010.pdf](#)

[EE-45970-015-015.pdf](#)

[EE-46556-0085-001.pdf](#)

[SP-45970-007-001.zip](#)

[SP-45970-010-010.zip](#)

[SP-45970-015-015.zip](#)

### Specifications

[AS-45970-001-001.pdf](#)

[AS-45970-002-001.pdf](#)

[AS-45970-990-001.pdf](#)

[PS-45970-001-001.pdf](#)


[PS-45970-002-001.pdf](#)

[TS-45970-001-001.pdf](#)

[TS-45970-0007-001.pdf](#)

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	 per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2025)4165-DC (25 June 2025)
EU RoHS	Compliant per EU 2015/863

### Compliance Statements

- EU RoHS
- REACH SVHC
- Low-Halogen

### Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

### Substances of Interest

- PFAS

### EU RoHS Certificate of Compliance

### Additional Product Compliance Information

---

## Part Details

### General

Status	Active
Category	Board-to-Board Connectors
Series	45970
Description	1.27mm Pitch, SEARAY Plug, 400 Circuits, 2.00mm Unmated Height, 10 Rows, with Pegs, Solder Charge Lead-Free
Application	Board-to-Board, Signal,

	Mezzanine
Component Type	PCB Header, Plug
Product Name	SEARAY
UPC	883906497330

### Agency

CSA	LR19980
UL	E29179

### Electrical

Current - Maximum per Contact	2.7A
Voltage - Maximum	240V AC

### Physical

Breakaway	No
Circuits (Loaded)	400
Circuits (maximum)	400
Color - Resin	Black
Durability (mating cycles max)	100
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	5.125/g
Number of Rows	10
Orientation	Vertical
Packaging Type	Embossed Tape on Reel
PCB Locator	Yes
PCB Retention	Yes

PCB Thickness - Recommended	1.60mm
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Robotic Placement	Pick and Place Cap
Shrouded	No
Stackable	No
Temperature Range - Operating	-55° to +125°C
Termination Interface Style	Surface Mount
Unmated Height	2.00mm

### Solder Process Data

Max-Duration	3
Lead-Free Process Capability	REFLOW
Max-Cycle	1
Max-Temp	260

---

### Mates With / Use With

#### Mates with Part(s)

Description	Part Number
1.27mm Pitch, SEARAY Receptacles	<u>45971</u>