

Radial Lead Type

Series: TA Type : A

- Features Endurance : 125°C 2000 h
Heat cycle: 1000 cycle -40°C to +125°C
Sleeve: not PVC

Japan



■ Specifications


Category temp. range	-40 to +125°C	
Rated W.V. Range	10 to 63 V .DC	
Nominal Cap. Range	1 to 4700 μ F	
Capacitance Tolerance	±20 % (120Hz/+20°C)	
DC Leakage Current	I < 0.01 CV (μ A) after 2 minutes	
Dissipation Factor	Please see the attached standard products list	
Endurance	After following life test with DC voltage and +125±2°C ripple current value applied (The sum of DC and ripple peak voltage shall not exceed the rated working voltage), for 2000 hours, the capacitors shall meet the limits specified below. Post test requirement at +20 °C	
	Capacitance change	±30% of initial measured value
	D.F.	< 300 % of initial specified value
	DC leakage current	< initial specified value
Shelf Life	After storage for 1000 hours at +125±2 °C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in "Endurance". (With voltage treatment)	

■ Frequency correction factor for ripple current

Cap. (μF)	Frequency(Hz)				
	60	120	1k	10k	100k
1 to 330	0.55	0.65	0.85	0.90	1.0
470 to 1000	0.70	0.75	0.90	0.95	1.0
2200 to 4700	0.75	0.80	0.90	0.95	1.0

■ Dimensions in mm (not to scale)

Sleeve: PET (Polyester)
Body Color : Black
Marking Color: Silver

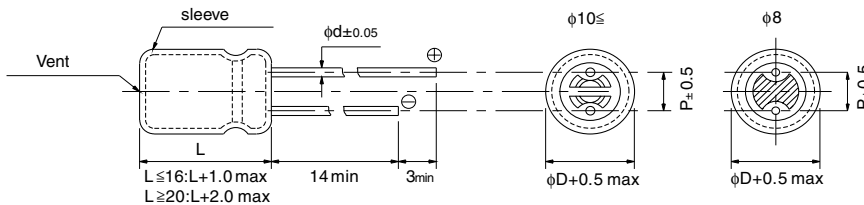

Body Dia. φD	8	10	12.5	16	18
Lead Dia. φd	0.6	0.6	0.8		
Lead space P	3.5	5.0	7.5		

■ Standard Products

W.V. (V)	Cap. (±20%) (μF)	Case size		Specification		Lead Length			Part No.	Min.Packaging Qty	
		Dia. (mm)	Length (mm)	Ripple current (100kHz) (+125°C) (mA)	Impedance (100kHz) (+20°C) (Ω)	Lead Dia. (mm)	Lead Space Straight (mm) Taping (mm)			Straight Leads (pcs)	Taping (pcs)
10	330	8	11.5	500	0.130	0.6	3.5	5.0	EEUTA1A331()	200	1000
	470	10	12.5	680	0.100	0.6	5.0	5.0	EEUTA1A471()	200	500
	1000	10	20	1100	0.057	0.6	5.0	5.0	EEUTA1A102()	200	500
		12.5	15	1085	0.070	0.6	5.0	5.0	EEUTA1A102S()	200	500
	2200	12.5	25	1750	0.033	0.6	5.0	5.0	EEUTA1A222L()	200	500
		16	20	1985	0.032	0.8	7.5	7.5	EEUTA1A222()	100	250
		18	15	1800	0.042	0.8	7.5	7.5	EEUTA1A222S()	100	250
	3300	16	25	2300	0.024	0.8	7.5	7.5	EEUTA1A332()	100	250
		18	20	2250	0.031	0.8	7.5	7.5	EEUTA1A332S()	100	250
	4700	16	31.5	2710	0.020	0.8	7.5	7.5	EEUTA1A472()	100	
18		25	2470	0.022	0.8	7.5	7.5	EEUTA1A472S()	100	250	
16	220	8	11.5	500	0.130	0.6	3.5	5.0	EEUTA1C221()	200	1000
	330	10	12.5	680	0.100	0.6	5.0	5.0	EEUTA1C331()	200	500
	470	10	16	945	0.075	0.6	5.0	5.0	EEUTA1C471()	200	500
		12.5	12.5	865	0.105	0.6	5.0	5.0	EEUTA1C471S()	200	500
	1000	12.5	20	1490	0.042	0.6	5.0	5.0	EEUTA1C102()	200	500
		16	15	1520	0.047	0.8	7.5	7.5	EEUTA1C102S()	100	250
	2200	16	25	2300	0.024	0.8	7.5	7.5	EEUTA1C222()	100	250
		18	20	2250	0.031	0.8	7.5	7.5	EEUTA1C222S()	100	250
	3300	16	31.5	2710	0.020	0.8	7.5	7.5	EEUTA1C332()	100	
		18	25	2470	0.022	0.8	7.5	7.5	EEUTA1C332S()	100	250
4700	18	31.5	3270	0.018	0.8	7.5	7.5	EEUTA1C472()	50		
25	100	8	11.5	500	0.130	0.6	3.5	5.0	EEUTA1E101()	200	1000
	220	10	12.5	680	0.100	0.6	5.0	5.0	EEUTA1E221()	200	500
	330	10	16	945	0.075	0.6	5.0	5.0	EEUTA1E331()	200	500
	470	10	20	1100	0.057	0.6	5.0	5.0	EEUTA1E471()	200	500
		12.5	15	1085	0.070	0.6	5.0	5.0	EEUTA1E471S()	200	500
	1000	12.5	25	1750	0.033	0.6	5.0	5.0	EEUTA1E102L()	200	500
		16	20	1985	0.032	0.8	7.5	7.5	EEUTA1E102()	100	250
		18	15	1800	0.042	0.8	7.5	7.5	EEUTA1E102S()	100	250
	2200	16	31.5	2710	0.020	0.8	7.5	7.5	EEUTA1E222()	100	
		18	25	2470	0.022	0.8	7.5	7.5	EEUTA1E222S()	100	250
3300	18	35.5	3310	0.017	0.8	7.5	7.5	EEUTA1E332()	50		
35	100	10	12.5	555	0.180	0.6	5.0	5.0	EEUTA1V101()	200	500
	220	10	16	765	0.130	0.6	5.0	5.0	EEUTA1V221()	200	500
	330	10	20	930	0.100	0.6	5.0	5.0	EEUTA1V331()	200	500
	470	12.5	20	1330	0.070	0.6	5.0	5.0	EEUTA1V471()	200	500
		16	15	1450	0.088	0.8	7.5	7.5	EEUTA1V471S()	100	250
	1000	16	25	2010	0.037	0.8	7.5	7.5	EEUTA1V102()	100	250
		18	20	2180	0.046	0.8	7.5	7.5	EEUTA1V102S()	100	250
	2200	18	35.5	2790	0.025	0.8	7.5	7.5	EEUTA1V222()	50	

When requesting taped product, please put the letter "B" between the "()". Lead wire pitch B=5mm, 7.5mm.
Endurance : 125°C 2000h

■ Standard Products

W.V. (V)	Cap. (±20%) (μF)	Case size		Specification		Lead Length			Part No.	Min. Packaging Q'ty		
		Dia. (mm)	Length (mm)	Ripple current (100kHz) (+125°C) (mA)	Impedance (100kHz) (+20°C) (Ω)	Lead Dia. (mm)	Lead Space Straight (mm) Taping (mm)			Straight Leads (pcs)	Taping (pcs)	
50	1.0	8	11.5	35	2.000	0.6	3.5	5.0	EEUTA1H1R0()	200	1000	
	2.2	8	11.5	50	1.800	0.6	3.5	5.0	EEUTA1H2R2()	200	1000	
	3.3	8	11.5	60	1.500	0.6	3.5	5.0	EEUTA1H3R3()	200	1000	
	4.7	8	11.5	85	1.150	0.6	3.5	5.0	EEUTA1H4R7()	200	1000	
	10	8	11.5	180	0.950	0.6	3.5	5.0	EEUTA1H100()	200	1000	
	22	8	11.5	250	0.650	0.6	3.5	5.0	EEUTA1H220()	200	1000	
	33	8	11.5	300	0.450	0.6	3.5	5.0	EEUTA1H330()	200	1000	
	47	8	11.5	440	0.350	0.6	3.5	5.0	EEUTA1H470S()	200	1000	
	100	10	12.5	555	0.180	0.6	5.0	5.0	EEUTA1H101()	200	500	
	220	10	20	930	0.100	0.6	5.0	5.0	EEUTA1H221()	200	500	
	330	16	12.5	20	1330	0.070	0.6	5.0	5.0	EEUTA1H331()	200	500
			16	15	1450	0.088	0.8	7.5	7.5	EEUTA1H331S()	100	250
	470	16	12.5	25	1650	0.055	0.6	5.0	5.0	EEUTA1H471L()	200	500
			16	20	1650	0.053	0.8	7.5	7.5	EEUTA1H471()	100	250
			18	15	1710	0.075	0.8	7.5	7.5	EEUTA1H471S()	100	250
	1000	16	31.5	2430	0.031	0.8	7.5	7.5	EEUTA1H102()	100		
18			25	2350	0.032	0.8	7.5	7.5	EEUTA1H102S()	100	250	
63	22	8	11.5	310	0.470	0.6	3.5	5.0	EEUTA1J220()	200	1000	
	33	10	12.5	410	0.360	0.6	5.0	5.0	EEUTA1J330()	200	500	
	47	10	16	460	0.270	0.6	5.0	5.0	EEUTA1J470()	200	500	
		12.5	12.5	650	0.240	0.6	5.0	5.0	EEUTA1J470S()	200	500	
	100	10	20	680	0.205	0.6	5.0	5.0	EEUTA1J101()	200	500	
	220	16	12.5	25	1325	0.100	0.6	5.0	5.0	EEUTA1J221L()	200	500
			16	20	1360	0.085	0.8	7.5	7.5	EEUTA1J221()	100	250
			18	15	1300	0.120	0.8	7.5	7.5	EEUTA1J221S()	100	250
	330	16	25	1660	0.070	0.8	7.5	7.5	EEUTA1J331()	100	250	
			18	20	1760	0.077	0.8	7.5	7.5	EEUTA1J331S()	100	250
	470	16	31.5	2055	0.060	0.8	7.5	7.5	EEUTA1J471()	100		
18			25	1990	0.060	0.8	7.5	7.5	EEUTA1J471S()	100	250	

When requesting taped product, please put the letter "B" between the "()". Lead wire pitch B=5mm, 7.5mm.
Endurance : 125°C 2000h