

MLCC > Normal Type

CL21A226MPCLR#

Mass Production

General

Standard

2T 

Lineup Normal

85°C

N/A

RoHS

REACH

?

"#" indicates a package code.


List of part numbers with package codes

CL21A226MPCLRNC, CL21A226MPCLRNL

※ If the packaging code is Z or R, the horizontal package type (HMC) is applied to reduce the acoustic noise.

Size

Size Code	0805 (2012)	inch(mm)
L Size	2.00±0.20mm	
W Size	1.25±0.20mm	
T Size	0.85±0.10mm	



Characteristics

Temperature Characteristic	X5R(-55 ~ +85)
Capacitance	22.0uF
Tolerance	±20%
Rated Voltage	10.0Vdc
Status	Mass Production


[Caution](#) | [Contact Us](#)

Copyright. SAMSUNG ELECTRO-MECHANICS All rights reserved.


SAMSUNG
ELECTRO-MECHANICS




Graph

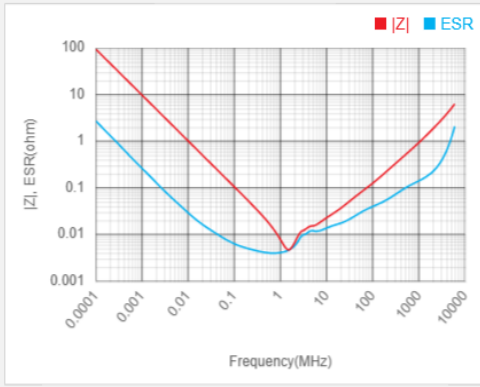


Frequency Characteristics
Network Analyzer

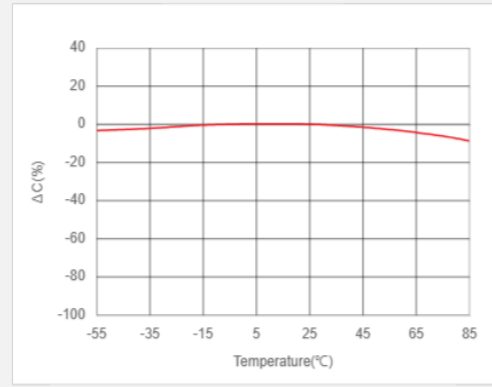


Temperature Characteristics of Capacitance(TCC)
LCR meter, 0.12kHz, 0.5Vrms

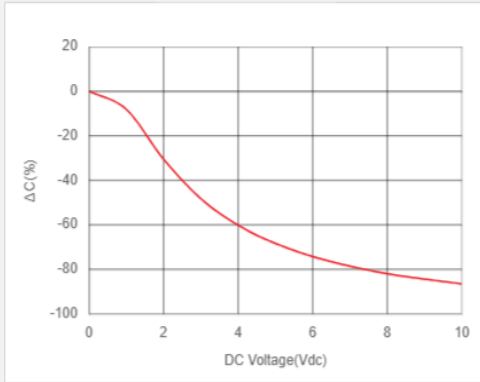


DC Bias Characteristics
LCR meter, 0.12kHz, 0.5Vrms

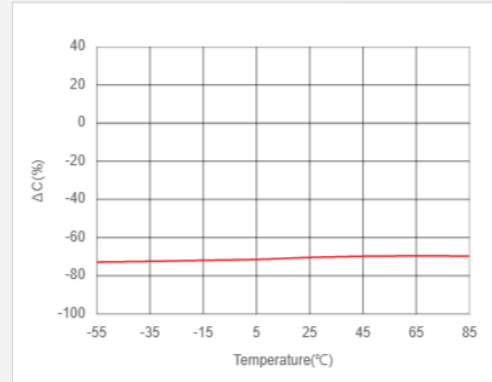

Bias TCC Characteristics
LCR meter, 0.12kHz, 0.5Vrms, 5Vdc

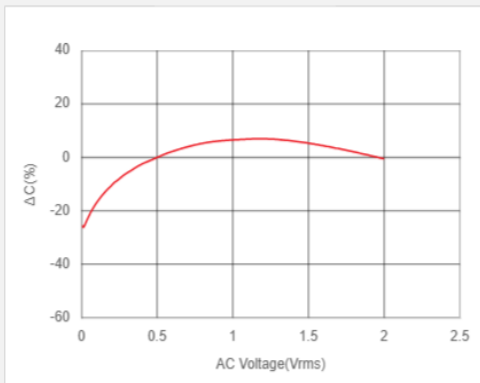

AC Voltage Characteristics
LCR meter, 0.12kHz

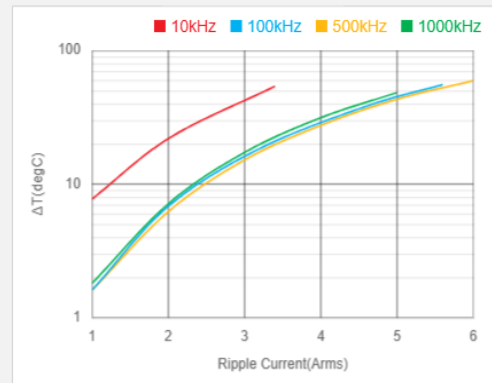

Temperature Rise by Ripple Current



Any data in this page are subject to change, modify or discontinue without notice.
This page includes the typical data for design reference only.
If there is any question regarding the data, please contact our sales personnel or application engineers.