


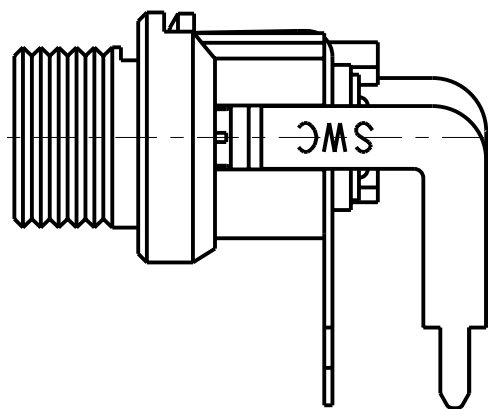
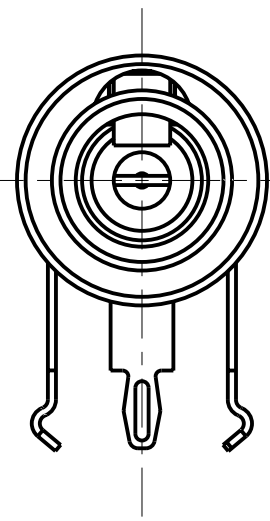
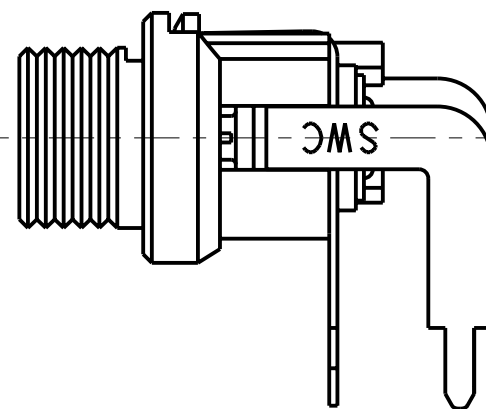


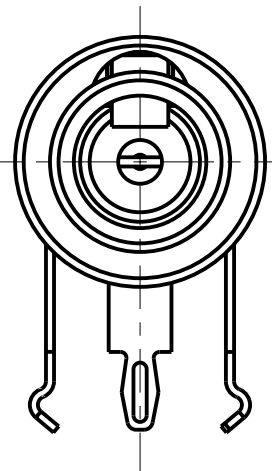


712RA
(CENTER PIN Ø0.098)
SCALE 3:1

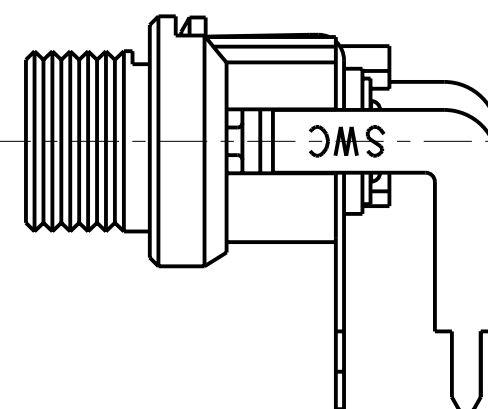


722RA
(CENTER PIN Ø0.076)
SCALE 3:1

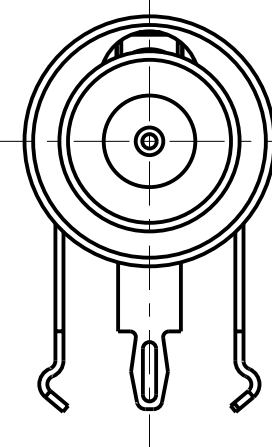




732RA
(CENTER PIN Ø0.048)
SCALE 3:1

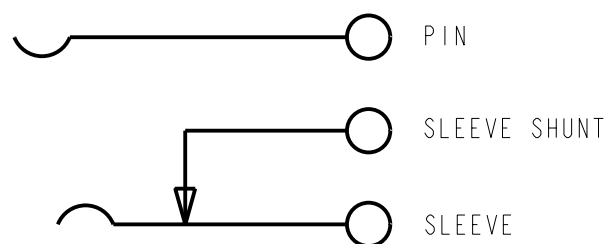

CIRCUIT DIAGRAM

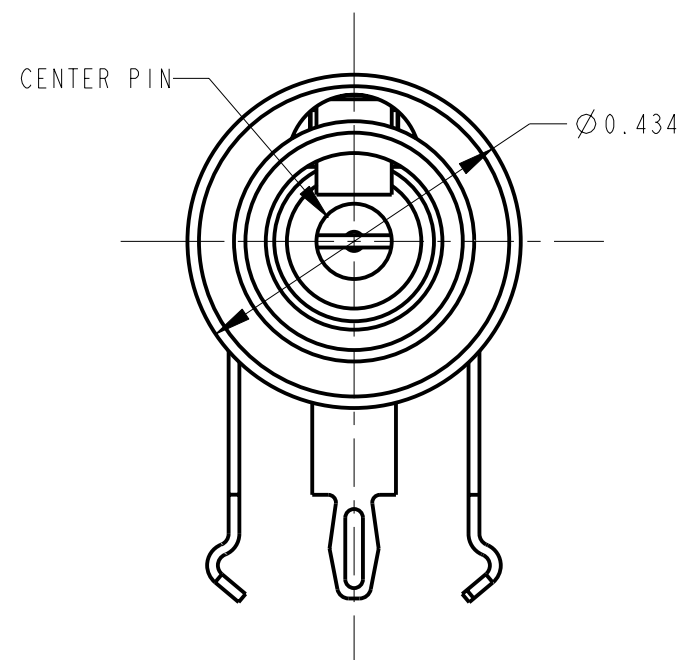

5/16-32 NEF-2A
THREAD (REF)

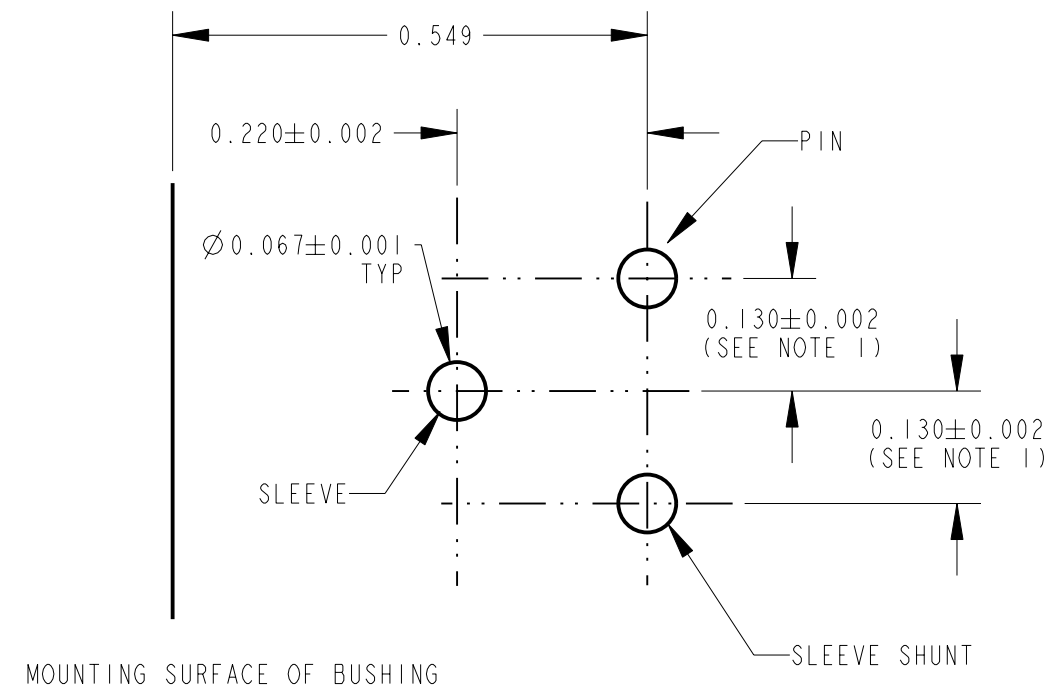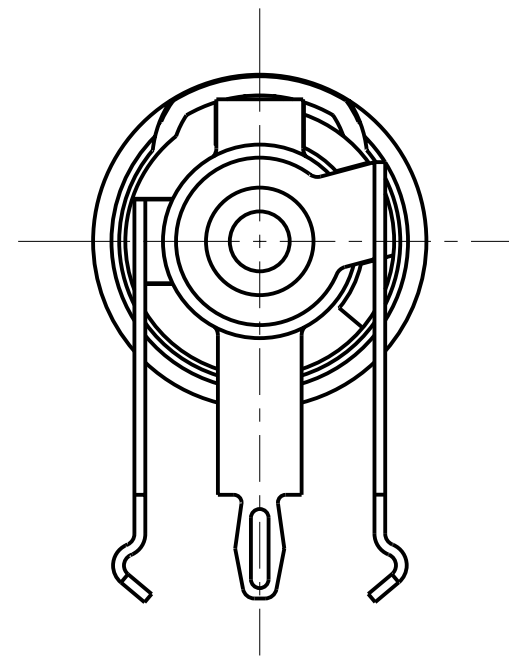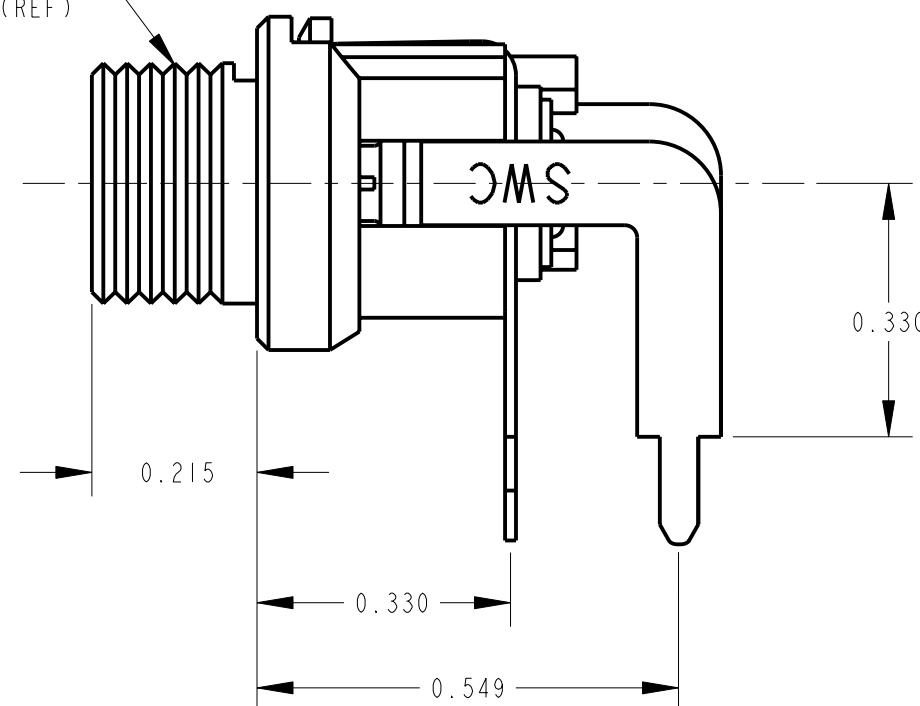

RECOMMENDED PANEL LAYOUT
(COMPONENT SIDE)

MATERIAL :

MOUNTING BUSHING : COPPER ALLOY, NICKEL PLATED
HOUSING: THERMOPLASTIC, BLACK
PIN, SPRING AND TERMINALS: COPPER ALLOY, SILVER PLATED
INSULATORS: PHENOLIC

HARDWARE: HEX NUT: COPPER ALLOY, NICKEL PLATED
FLAT WASHER: STEEL, NICKEL PLATED
(NOT SHOWN)

NOTE:

1. FOR HAND INSERTION USE 0.130,
FOR AUTOMATED INSERTION USE 0.135.

CUSTOMER DRAWING

REV	ECO NUMBER	DATE	BY	APVD
B	22992	9-1-99	JL	DK
A	RELEASE TO PROD. ECO #22661	3-4-99	MM	JF
REV	ECO NUMBER	DATE	BY	APVD

★ STAR SYMBOL DENOTES CRITICAL DIMENSION				
UNLESS OTHERWISE SPECIFIED				
1. ALL DIMENSIONS IN INCHES				
- TWO PLACE DECIMALS ±0.01				
- THREE PLACE DECIMALS ±0.005				
- ANGLES ±1°				
- ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.				
2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002				
3. REMOVE ALL BURRS				
DO NOT SCALE DRAWING				

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.				
SIZE	WIDTH	MULT	LBS/M	TEMPER
FINISH				
SPEC No.		MATERIAL SPEC No.		
FIRST USED ON		SCALE 3:1		
DATE DRAWN	BY	CHKD	APVD	
4-MAR-99	MM	3-4-99	JF	
NAME				
RIGHT ANGLE POWER JACK				
PART No. 7__RA_SERIES				
REV B				

Switchcraft®