© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D1	REVISED AS PER ECR-26-271253	17FEB2026	KSD	SKN

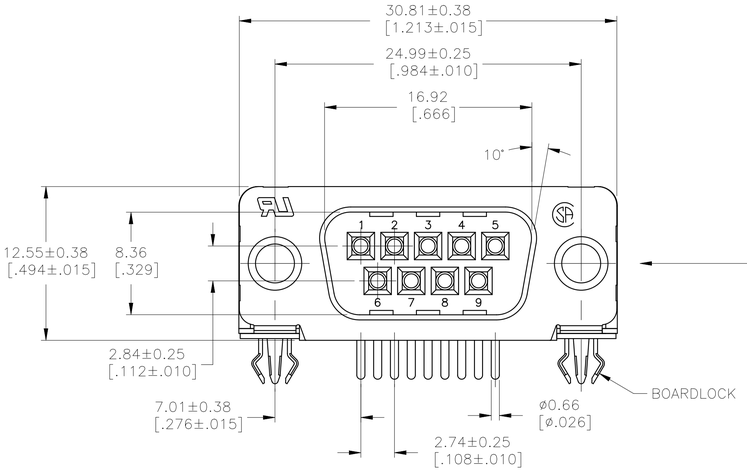



FOR –5 & –6 ONLY

1. HOUSING: NYLON OR POLYESTER, FLAME RETARDANT, 94V–0 RATED, COLOR BLACK.
   SHELL: CARBON STEEL.
   CONTACTS: BRASS.
   EYELETS: BRASS.
   BOARDLOCKS: COPPER ALLOY.
   INSERTS: ZINC.
   SCREWLOCKS: ZINC.

2. SHELL: 2.54µm[.000100] MIN TIN OVER 1.27µm[.000050] MIN COPPER. CONTACTS: SEE TABLE.
   EYELETS: 5.08µm[.000200] MIN TIN OVER COPPER FLASH.
   BOARDLOCKS: 5.08µm[.000200] MIN TIN OVER 1.27µm[.000050] MIN NICKEL.
   INSERTS: CLEAR CHROMATE.
   SCREWLOCKS: CLEAR CHROMATE.

3. 0.76µm[.000030] MIN GOLD PLATE ON THE MATING SURFACES, 2.54µm[.000100] MIN TIN PLATE ON THE SOLDER END, 1.27µm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE CONTACT
   –OR–
   GOLD FLASH OVER PALLADIUM–NICKEL PLATE, 0.76µm[.000030] MIN TOTAL ON THE MATING SURFACES, 2.54µm[.000100] MIN TIN PLATE ON THE SOLDER END, 1.27µm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE CONTACT.

4. GOLD FLASH ON MATING END, 2.54µm[.000100] MIN TIN ON SOLDER END, ALL OVER 1.27µm[.000050] MIN NICKEL.

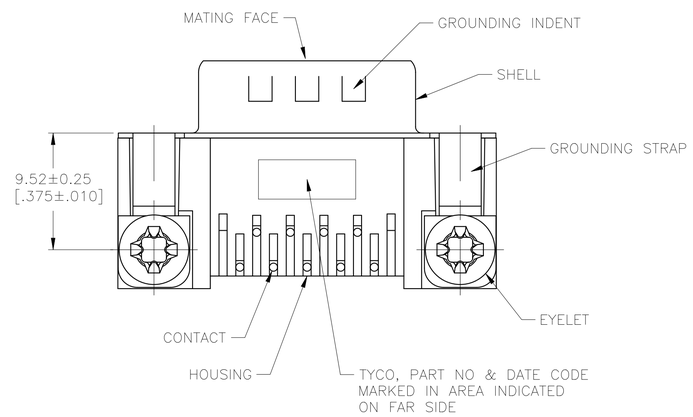

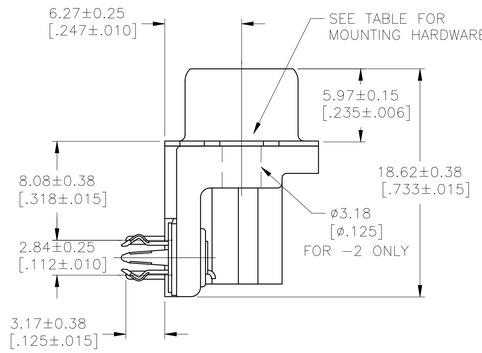



DETAIL A



DETAIL B

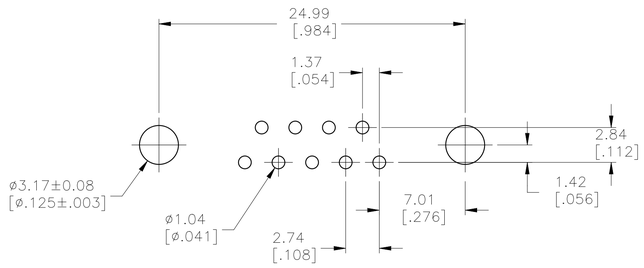

RECOMMENDED PC BOARD LAYOUT
1.57[.062] PC BOARD
(VIEWED FROM CONNECTOR SIDE)

3	SEE DETAIL B	5747840–6
4	SEE DETAIL B	5747840–5
3	SEE DETAIL A	5747840–4
4	SEE DETAIL A	5747840–3
3	NONE	5747840–2
CONTACT FINISH	MOUNTING HARDWARE	PART NUMBER

COPYRIGHT 2005
TYCO ELECTRONICS CORP
ALL RIGHTS RESERVED

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONING AND TOLERANCING PER ASME Y14.5M–2009

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± 0.13[.005]
4 PLC ± –
ANGLES ± 2°

MATERIAL 1
FINISH 2

DWN J.GERACE 07FEB05
CHK S.BOLASH 07FEB05
APVD M.WALMSLEY 07FEB05
PRODUCT SPEC 108–40025
APPLICATION SPEC 114–40010
WEIGHT –

TE Connectivity

NAME
PLUG ASSY,SIZE 1, 9 POS
RIGHT ANG,FRONT METAL SHELL
8.08[.318] SERIES, AMP HD–20

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C–5747840	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV D1